

## High Precision Bearings for Combined Loads

Axial/radial bearings, axial angular contact ball bearings, axial/radial bearings with angular measuring system

Technical Product Information

We pioneer motion

**SCHAEFFLER**



---

## Foreword

### Focus on complete system

With trend-setting bearing arrangement solutions for feed spindles, main spindles, rotary tables and linear guidance units, Schaeffler has been at the forefront of the world market for decades. However, bearing components alone are often no longer the decisive factor for these machine subsystems.

Our customers are continuing to benefit from significant performance improvements and unique selling points. In order to optimise the entire machine tool system, however, it is also becoming ever more important to integrate important functions such as measurement, sealing, lubrication, and braking in the components themselves. This intellectual approach focusses on the complete system, including the bearing and bearing position. This means that you can access a product range that gives optimum coverage for all your applications in the machine tool.

### Direct drives and mechatronic solutions

There is increasingly frequent usage of direct drives and mechatronic solutions in machine tools. We therefore have Schaeffler Industrial Drives as a further strong specialist in our provider network, which enables us to supply you from a single source with not only bearing elements but also components precisely matched to the drive system.

This opens up completely new technical and economic design possibilities for your requirements as well as significant advantages in the process chain.

In terms of products, we can offer you a comprehensive, precisely balanced range of precision technology and the highest product quality. In order to support your development stages as effectively as possible, we also have a worldwide network of engineers and service and sales technicians working for you and ensuring that we maintain close contact with you in your own location.

### New solutions from the modular system concept

Regardless of whether high-speed, high-performance or high-precision solutions are required, Schaeffler customers can select exactly the right components for their rotary axes and rotary tables from a highly specialised modular concept. The 3 standard torque motor series from Schaeffler Industrial Drives can be combined as required with the axial/radial bearing series to permit the design of the most suitable solution for every machine used in machining processes.

Schaeffler tailors the optimal combination of components to meet customer requirements, perfectly matching them to the specific task as well as the required precision and dynamics.

# Contents

|         |                                                                           |    |
|---------|---------------------------------------------------------------------------|----|
| 1       | Axial/radial bearings, axial angular contact ball bearings .....          | 7  |
| 1.1     | Bearing design.....                                                       | 10 |
| 1.2     | Lubrication .....                                                         | 11 |
| 1.2.1   | Relubrication.....                                                        | 11 |
| 1.2.2   | Overlubrication.....                                                      | 12 |
| 1.2.3   | Commissioning.....                                                        | 13 |
| 1.3     | Sealing .....                                                             | 13 |
| 1.4     | Speeds.....                                                               | 13 |
| 1.5     | Rigidity .....                                                            | 14 |
| 1.6     | Temperature range.....                                                    | 14 |
| 1.6.1   | Temperature distribution in the rotary axis system.....                   | 14 |
| 1.6.2   | Design regulations for optimum temperature distribution .....             | 15 |
| 1.7     | Cages.....                                                                | 16 |
| 1.8     | Internal clearance.....                                                   | 16 |
| 1.9     | Dimensions, tolerances .....                                              | 16 |
| 1.10    | Structure of the ordering designation.....                                | 21 |
| 1.11    | Dimensioning.....                                                         | 23 |
| 1.11.1  | Basic rating life .....                                                   | 23 |
| 1.11.2  | Static load safety factor .....                                           | 23 |
| 1.11.3  | Static limiting load diagrams .....                                       | 24 |
| 1.11.4  | Frictional torque .....                                                   | 30 |
| 1.12    | Design of the adjacent construction.....                                  | 32 |
| 1.12.1  | Fits .....                                                                | 32 |
| 1.12.2  | Axial and radial runout accuracy of the bearing arrangement.....          | 33 |
| 1.12.3  | Fit recommendations for shafts .....                                      | 33 |
| 1.12.4  | Fit recommendations for housings.....                                     | 34 |
| 1.12.5  | Fit selection depending on the screw connection of the bearing rings..... | 35 |
| 1.12.6  | Geometrical and positional accuracy of the adjacent construction .....    | 35 |
| 1.12.7  | Mounting dimensions $H_1$ , $H_2$ .....                                   | 38 |
| 1.12.8  | Unsupported or supported L-section ring.....                              | 39 |
| 1.12.9  | Design of fixing threads in the adjacent construction .....               | 40 |
| 1.13    | Mounting and dismounting .....                                            | 40 |
| 1.13.1  | Improved ease of mounting .....                                           | 41 |
| 1.13.2  | Mounting.....                                                             | 41 |
| 1.14    | Further information .....                                                 | 42 |
| 1.15    | Product tables.....                                                       | 43 |
| 1.15.1  | Explanations of the product tables.....                                   | 43 |
| 1.15.2  | YRTA, main dimensions, performance data .....                             | 44 |
| 1.15.3  | YRTA, mounting dimensions, rigidity values .....                          | 46 |
| 1.15.4  | YRT, main dimensions, performance data.....                               | 48 |
| 1.15.5  | YRT, mounting dimensions, rigidity values.....                            | 50 |
| 1.15.6  | YRTC, main dimensions, performance data .....                             | 52 |
| 1.15.7  | YRTC, mounting dimensions, rigidity values .....                          | 54 |
| 1.15.8  | YRTS, main dimensions, performance data.....                              | 56 |
| 1.15.9  | YRTS, mounting dimensions, rigidity values.....                           | 58 |
| 1.15.10 | ZKLDF, main dimensions, performance data .....                            | 60 |
| 1.15.11 | ZKLDF, mounting dimensions, rigidity values .....                         | 62 |

|        |                                                                         |     |
|--------|-------------------------------------------------------------------------|-----|
| 2      | Axial/radial bearings with incremental angular measuring system.....    | 64  |
| 2.1    | Bearing design.....                                                     | 64  |
| 2.2    | Integrated angular measuring system.....                                | 65  |
| 2.2.1  | Measuring heads.....                                                    | 65  |
| 2.2.2  | Operating principle.....                                                | 67  |
| 2.2.3  | Electronic interfaces.....                                              | 69  |
| 2.2.4  | Connector assignment for interfaces.....                                | 72  |
| 2.2.5  | Functional safety.....                                                  | 73  |
| 2.2.6  | Structure of the ordering designation.....                              | 75  |
| 2.2.7  | Technical data.....                                                     | 76  |
| 2.3    | Lubrication.....                                                        | 79  |
| 2.4    | Sealing.....                                                            | 79  |
| 2.5    | Speeds.....                                                             | 80  |
| 2.6    | Rigidity.....                                                           | 80  |
| 2.7    | Temperature range.....                                                  | 80  |
| 2.8    | Internal clearance.....                                                 | 80  |
| 2.9    | Dimensions, tolerances.....                                             | 80  |
| 2.10   | Structure of the ordering designation.....                              | 81  |
| 2.11   | Design of the adjacent construction.....                                | 82  |
| 2.11.1 | Adjacent construction.....                                              | 82  |
| 2.12   | Fitting and dismantling.....                                            | 83  |
| 2.13   | Product tables.....                                                     | 84  |
| 2.13.1 | Explanations of the product tables.....                                 | 84  |
| 2.13.2 | YRTCMA, main dimensions, performance data.....                          | 86  |
| 2.13.3 | YRTCMA, mounting dimensions, rigidity values.....                       | 88  |
| 2.13.4 | YRTSMA, main dimensions, performance data.....                          | 90  |
| 2.13.5 | YRTSMA, mounting dimensions, rigidity values.....                       | 92  |
| 2.13.6 | YRTCMI, main dimensions, performance data.....                          | 94  |
| 2.13.7 | YRTCMI, mounting dimensions, rigidity values.....                       | 96  |
| 3      | Axial/radial bearings with absolute value angular measuring system..... | 98  |
| 3.1    | Bearing design.....                                                     | 98  |
| 3.2    | Angular measuring system.....                                           | 99  |
| 3.2.1  | Dimensional scale.....                                                  | 99  |
| 3.2.2  | Measuring heads.....                                                    | 100 |
| 3.2.3  | Measurement accuracy.....                                               | 101 |
| 3.2.4  | Setting and diagnostic software MEKOEDS.....                            | 102 |
| 3.2.5  | Cables for signal transmission.....                                     | 102 |
| 3.2.6  | Error-free signal transmission.....                                     | 104 |
| 3.2.7  | Measures to protect against interference.....                           | 105 |
| 3.2.8  | Laying signal cables.....                                               | 107 |
| 3.2.9  | Electronic evaluation system.....                                       | 107 |
| 3.2.10 | Functional principle for detecting the zero position.....               | 108 |
| 3.2.11 | Compatibility.....                                                      | 109 |
| 3.2.12 | Functional testing according to standards.....                          | 109 |
| 3.2.13 | Plug configuration.....                                                 | 111 |
| 3.2.14 | Technical data.....                                                     | 111 |
| 3.3    | Lubrication.....                                                        | 113 |
| 3.4    | Sealing.....                                                            | 113 |
| 3.5    | Speeds.....                                                             | 113 |

|        |                                                                                                        |     |
|--------|--------------------------------------------------------------------------------------------------------|-----|
| 3.6    | Rigidity .....                                                                                         | 114 |
| 3.7    | Temperature range .....                                                                                | 114 |
| 3.8    | Dimensions, tolerances .....                                                                           | 114 |
| 3.9    | Structure of the ordering designation .....                                                            | 114 |
| 3.10   | Dimensioning .....                                                                                     | 115 |
| 3.11   | Design of the adjacent construction .....                                                              | 115 |
| 3.12   | Fitting and dismantling .....                                                                          | 117 |
| 3.12.1 | Safety-related information about the measuring device under the terms of the Machinery Directive ..... | 117 |
| 3.12.2 | Fitting guidelines for axial/radial bearings .....                                                     | 117 |
| 3.12.3 | Fitting guidelines for measuring heads .....                                                           | 117 |
| 3.12.4 | Diametrically opposed arrangement of measuring heads .....                                             | 118 |
| 3.12.5 | Fitting the measuring heads .....                                                                      | 118 |
| 3.12.6 | Cables and plugs for signal transmission .....                                                         | 119 |
| 3.13   | Spare parts .....                                                                                      | 119 |
| 3.14   | Further information .....                                                                              | 120 |
| 3.15   | Product tables .....                                                                                   | 121 |
| 3.15.1 | Explanations .....                                                                                     | 121 |
| 3.15.2 | YRTCM, main dimensions, performance data .....                                                         | 122 |
| 3.15.3 | YRTCM, mounting dimensions, rigidity values .....                                                      | 124 |
| 3.15.4 | YRTSM, main dimensions, performance data .....                                                         | 126 |
| 3.15.5 | YRTSM, mounting dimensions, rigidity values .....                                                      | 128 |
| 4      | Axial/radial bearings featuring shaft locating washer with helical gear teeth .....                    | 130 |
| 4.1    | Further information .....                                                                              | 131 |

# 1 Axial/radial bearings, axial angular contact ball bearings

Axial/radial bearings YRTA, YRTC and YRTS as well as axial angular contact ball bearings ZKLDF are ready-to-fit, high-precision bearings for high-accuracy applications involving combined loads. They can support radial loads, axial loads from both sides and tilting moments without clearance and are particularly suitable for bearing arrangements with high requirements for running accuracy.


Fixing holes in the bearing rings make these units very easy to fit.

The bearings are radially and axially preloaded after mounting.

The mounting dimensions of all series are identical.

Axial/radial bearings are also available with an absolute value angular measuring system or have systems with pitch-coded reference marks. The measuring systems can measure angles to an accuracy of a few angular seconds by non-contact means.


1 Axial/radial bearings and axial angular contact ball bearings from Schaeffler

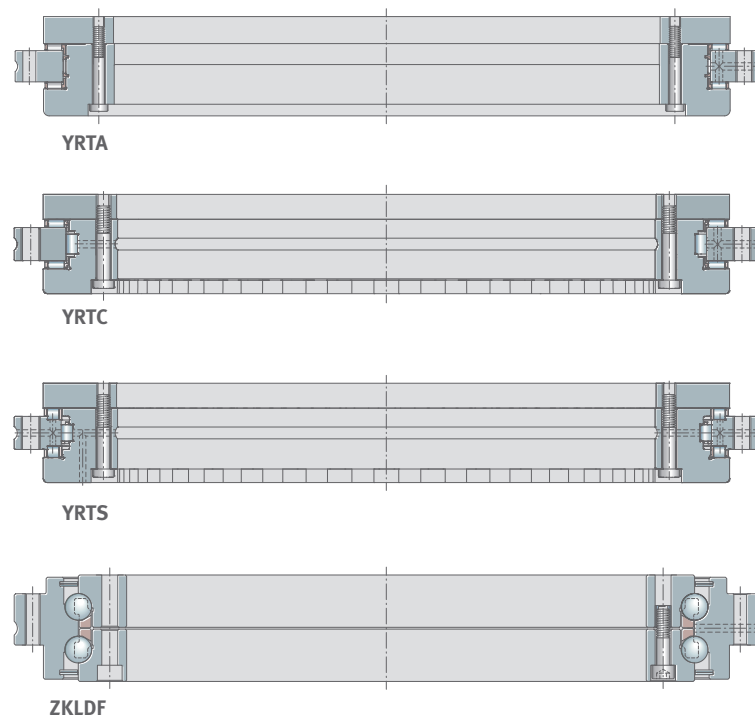

001B3394

Schaeffler has an exceptionally large selection of rotary table bearings for a wide variety of machining processes, axis types, sizes, cutting forces and speed ranges. The axial/radial bearings YRTC and YRTS and the double row axial angular contact ball bearings ZKLDF represent the largest product range for rotary tables and rotary axes on the market. These bearings are geometrically interchangeable. The integral measuring system can be selected as an option for series YRTC and YRTS.

2 Speed and tilting rigidity

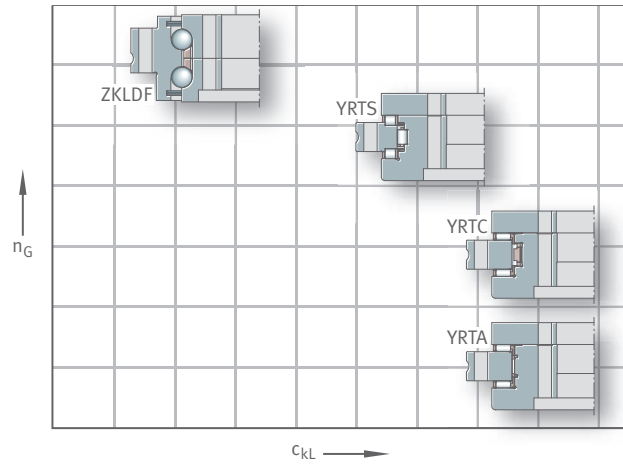


001B33A4

|          |                   |                                      |
|----------|-------------------|--------------------------------------|
| $n_G$    | $\text{min}^{-1}$ | Limiting speed                       |
| $c_{kL}$ | $\text{Nm/mrad}$  | Tilting rigidity of bearing position |

Axial/radial bearings YRTA

- high precision and tilting rigidity for swivel applications with low dynamics
- cost-optimised solution for rotary axes, not just for machine tools
- applications include pallet changers and rotary storage systems

3 Axial/radial bearings YRTA

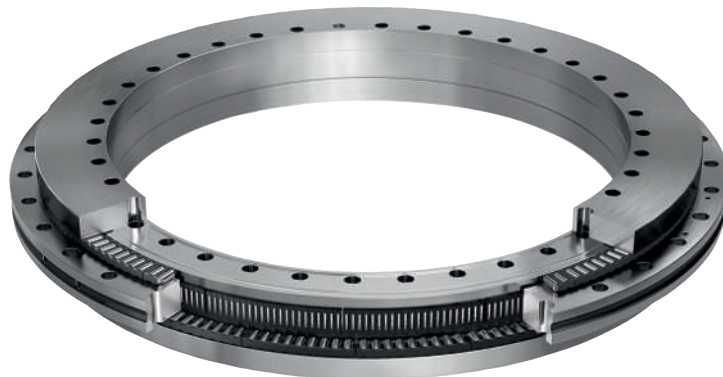


001B2743

### Axial/radial bearings YRT, YRTC

- Design using X-life
- Applications include highly loaded positioning axes, swivel type axes, and gear hobbing machines.

4 Axial/radial bearing YRT, YRTC

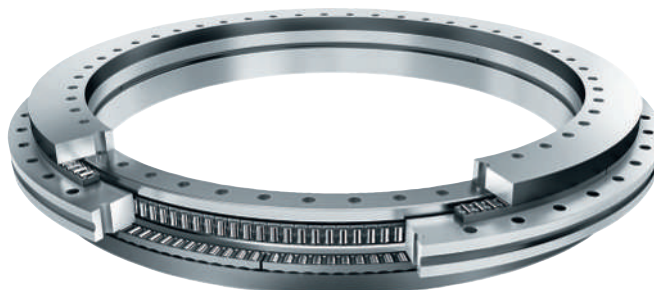


0009AF66

### Axial/radial bearings for higher speeds YRTS

- as bearing arrangements for high-speed rotary axes and rotary tables
- for use in ultra-precision milling and grinding machines and in gear cutting machines

5 Axial/radial bearing YRTS

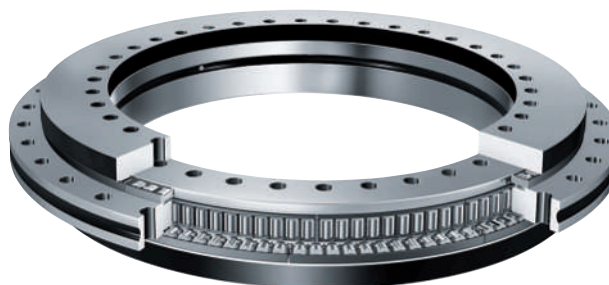

0001A63D

### Axial angular contact ball bearings ZKLDF

- For bearing arrangements with high duty cycles, such as rotary tables with a main spindle function.
- Applications include combined milling and turning operations, as well as milling, grinding or honing.




## 1.1 Bearing design

### YRTA

In terms of their fundamental design, bearings in the YRTA series are based on the proven three-row YRTC roller bearing design and have been specifically optimised to meet the requirements of automation applications. These bearings are also suitable for classic driven rotary tables. Axial/radial bearings YRTA offer the technical advantages of the proven YRTC series, adapted for applications in machine tool peripherals, but also for applications in productronics and for classic rotary tables featuring swivel operation.

Bearings in the YRTA series have a radial cage. Fixing holes in the bearing rings make these units very easy to fit.

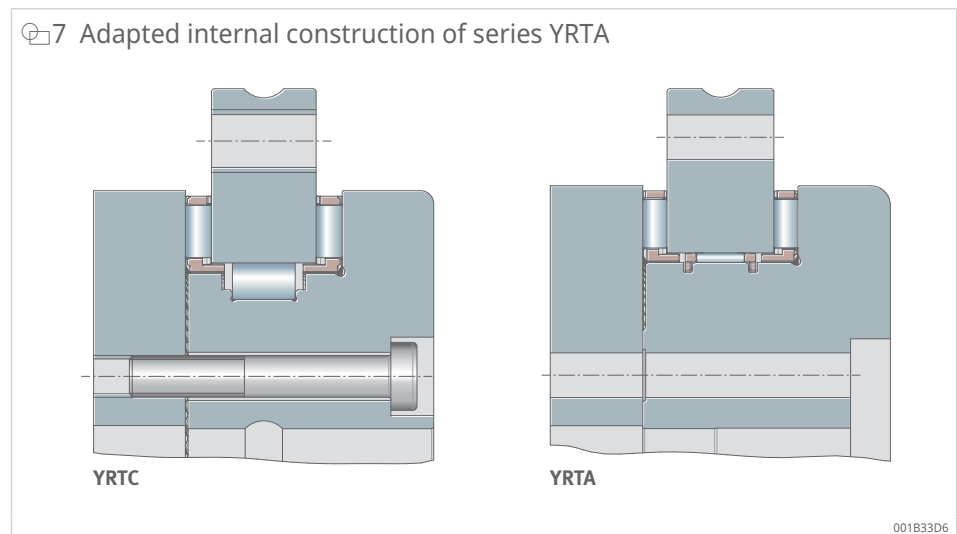

## YRT, YRTC

The axial component and radial component are guided by a cage. Bearings of series YRTC either have a radial cage or are designed with a full complement cylindrical roller set, depending on the size. The outer ring, L-section ring and shaft locating washer have fixing holes.

Once the bearings have been fitted and fully screw mounted, they are radially and axially clearance-free and preloaded.

## YRTS

Axial/radial bearing YRTS has a low frictional torque and is therefore suitable for supporting direct drive axes operating at high speeds.

The axial component and radial component are guided by a cage. Bearings of series YRTS are ready-to-fit bearing units with a screw mounting facility.

Once the bearings have been fitted and fully screw mounted, they are radially and axially clearance-free and preloaded.

## ZKLDF

Axial angular contact ball bearings ZKLDF comprise a single-piece outer ring, a two-piece inner ring and two ball and cage assemblies with a contact angle of 60°. The outer ring and inner ring have fixing holes for screw mounting the bearing onto the adjacent construction.

The unit is secured by means of retaining screws for transport and safe handling.

## 1.2 Lubrication

Rotary axis bearings from all series are pre-lubricated with high-quality grease.

### 1.2.1 Relubrication

The speed capability, friction, rating life, functional capability and the time periods between relubrication intervals are influenced, in some cases significantly, by the grease used.

For a calculation of the relubrication quantities and intervals, taking into account the load spectrum and environmental conditions, please contact Schaeffler.

#### YRTA

These bearings can be relubricated via the outer ring.

#### YRT, YRTC


These bearings can be relubricated via the outer and inner ring.

#### YRTS

These bearings can be relubricated via the outer and inner ring.

#### ZKLDF

These bearings can be relubricated via the outer ring.

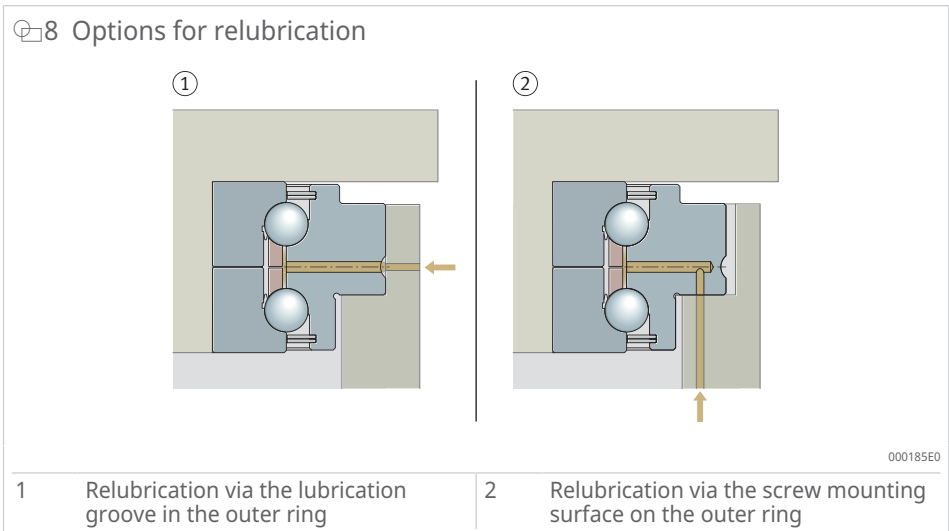


1 Grease for relubrication

| Bearing                   | Grease           |
|---------------------------|------------------|
| YRTA                      | Arcanol MULTITOP |
| YRTC                      | Arcanol MULTITOP |
| YRTS200 ... YRTS460       | Arcanol LOAD150  |
| YRTS580-XL ... YRTS650-XL | Arcanol SPEED2,6 |
| ZKLDF                     | Arcanol MULTITOP |


1.2.2 Overlubrication

Overlubrication increases the frictional torque at high speeds. A high frictional torque can lead to overheating, which may damage the bearing. Performing the running-in cycle restores the original frictional torque after unintentional overlubrication.

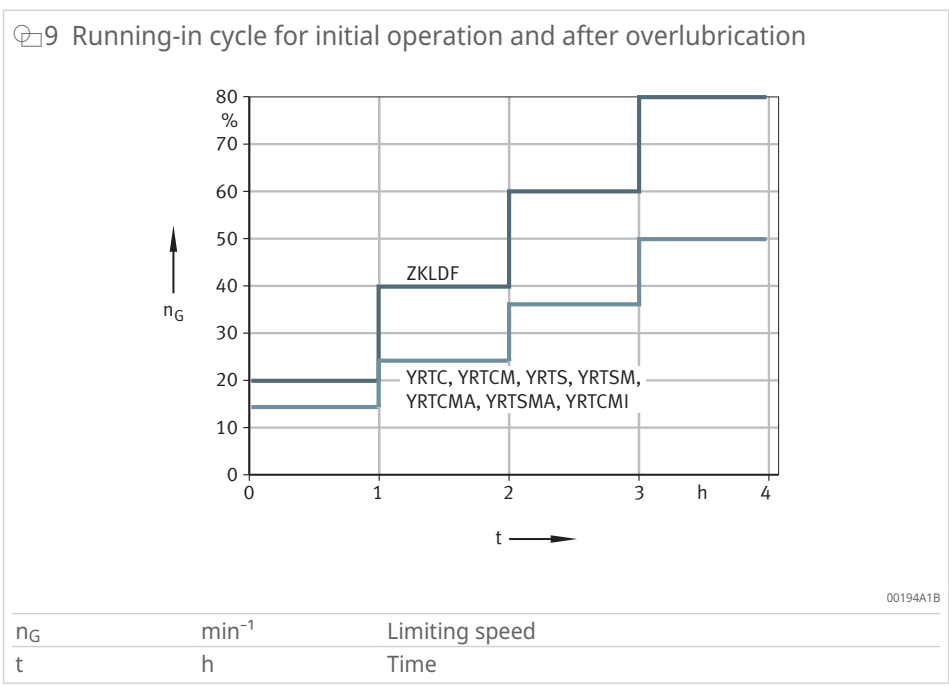

### 1.2.3 Commissioning

Rolling bearings may exhibit increased frictional torque during commissioning, which can lead to overheating where there is immediate operation at high speeds.

-  In order to prevent overheating of the bearing, the running-in cycle should always be carried out. The cycle may be shortened if there is appropriate monitoring of the bearing temperature. The bearing ring temperature must not exceed +60 °C.

Swivel axes operate at low speeds or with low duty cycles. As a result, the running-in cycle can be omitted for swivel axis applications.

## 1.3 Sealing

Axial/radial bearings are not sealed.

### YRTA

Axial/radial bearings of the YRTA series are also optionally available with sheet metal covers and gap seals on both sides. The seal reduces the ingress of dust in automation applications.

### ZKLDF


Axial angular contact ball bearings have sealing shields on both sides.


## 1.4 Speeds

The limiting speeds provided in the product tables must be observed ►43 | 1.15.

The limiting speeds stated for these bearing series were determined on test rigs under the following conditions:

- grease distribution cycle according to the defined data
- maximum increase in bearing temperature of 40 K in the area of the raceway
- operating duration ED = 100 %, which means continuous operation at the limiting speed  $n_G$
- bearing fully screw mounted on solid fixtures
- no external load, only preload and mass of the fixtures

-  For applications with a high duty cycle ED or continuous operation at a speed parameter of  $n \cdot d_M > 35000 \text{ min}^{-1} \cdot \text{mm}$  at an ED > 10 %, the series YRTS or ZKLDF should be selected in the bore range of 200 mm to 650 mm.

-  If the environmental conditions differ from the specifications in relation to adjacent construction tolerances, lubrication, ambient temperature, heat dissipation or from the normal operating conditions for machine tools, the stated limiting speeds must be checked.

In the event of a brief operating duration, please consult Schaeffler regarding the permissible limiting speed  $n_G$ .

### YRTA

Axial/radial bearings YRTA are designed for swivel-type operation.

## YRT, YRTC

Axial/radial bearings of series YRT and YRTC are designed for swivel-type operation and, depending on the size, are suitable for medium to high speeds. For rotary operation with a high duty cycle ED, the use of axial/radial bearings of series YRTS is preferred in the bore range of 200 mm to 460 mm.

## YRTS

Axial/radial bearings YRTS are designed for high speeds.

## ZKLDF

Axial angular contact ball bearings ZKLDF are suitable for the highest speeds.

## 1.5 Rigidity

The rigidity of a bearing position describes the magnitude of deflection from the ideal position under load. The static rigidity thus has a direct influence on accuracy.

The calculated rigidity values for the rolling element sets are for informational purposes only. They allow for comparison with other bearing designs.

The product tables give the rigidity values for the complete bearing position. These take account of the deflection of the rolling element set as well as the deformation of the bearing rings and the screw connections ►43 | 1.15.

## 1.6 Temperature range

Axial/radial bearings and axial angular contact ball bearings are suitable for operating temperatures from  $-30\text{ °C}$  to  $+100\text{ °C}$ .

### 1.6.1 Temperature distribution in the rotary axis system

Rotary axes with a main spindle function, such as those used for combined milling and turning operations and driven directly by a torque motor, are systems with complex thermal characteristics.

The temperature distribution in the rotary axis system must be considered in greater detail during the design process:

- Asymmetrical rotary axis housings can undergo asymmetrical deformation due to heating.
- In turn, out-of-round bearing seats lead to additional bearing load, reduced life and a negative influence on running behaviour and running accuracy.
- Temperature management of the rotary axis in the form of targeted cooling and heating is generally necessary for high-performance rotary axes. Schaeffler offers high-performance simulation tools to assist with the simulation work.



Where there is non-uniform temperature distribution between the inner ring and outer ring, rotary axis bearings with ball contact, such as series ZKLDF, exhibit more tolerant behaviour than rotary axis bearings with line contact, such as axial/radial cylindrical roller bearings or crossed roller bearings.

The specified bearing characteristics only apply if the bearing preload remains constant. The bearing preload can be altered by mechanical stresses, such as those caused by temperature differences or adjacent machine elements, for example via force-locking clamping connections.


Design regulations for optimum temperature distribution must be observed ►15 | 1.6.2.

## 1.6.2 Design regulations for optimum temperature distribution

Proven design regulations based on practical experience:

- In preference, flange mount the rotor of the torque motor on the rotary table plate to keep the flow of heat through the bearing to a minimum. Be aware of additional heat generation in the rotor in high-speed applications.
- The distance between the motor and the bearing should be as large as possible. A large distance reduces the transfer of heat from the rotor to the bearing. The stresses occurring between the components as a result of varying thermal expansion are reduced by the increased elasticity of the system. The heat gradient should be as low and constant as possible.
- The rotary table plate bearing must be centred with sufficient rigidity to allow the overall system to attain a high level of rigidity. The risk of deformation to the bearing seat due to the increase in the temperature of the rotor is also reduced.
- Use torque motors which are suitable for the requirements only, with low loss of power and a high motor constant. We recommend using torque motors from Schaeffler Industrial Drives.

10 Ideal rotary table, taking account of the occurring heat

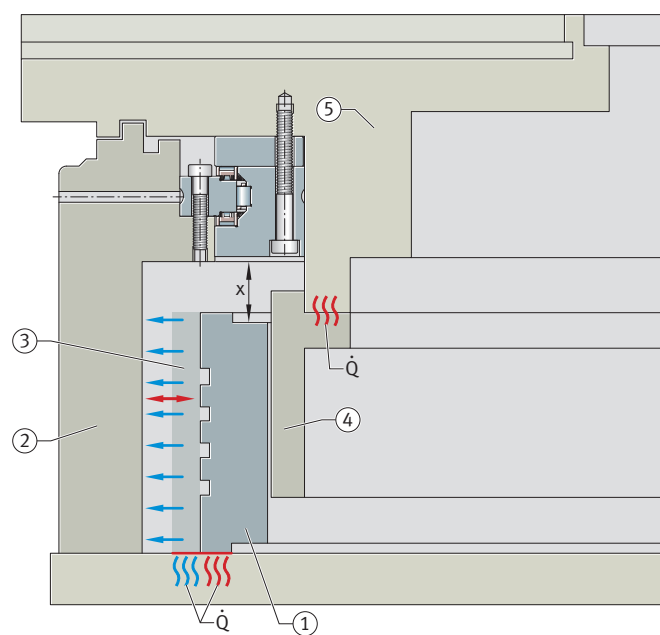

0001A2DB

|           |                            |                                    |                           |
|-----------|----------------------------|------------------------------------|---------------------------|
| 1         | Stator of the torque motor | 2                                  | Rotary table housing      |
| 3         | Stator cooling             | 4                                  | Rotor of the torque motor |
| 5         | Rotary table plate         |                                    |                           |
| $\dot{Q}$ | W                          | Heat flow                          |                           |
| x         | mm                         | Distance between motor and bearing |                           |



Regulated cooling of the stationary and rotating components may be required in order to limit the temperature variations between the bearing inner ring and outer ring.

## 1.7 Cages

### YRTA

The axial component and the radial component are guided by a cage.

### YRT, YRTC

In bearings of series YRT and YRTC, the axial roller set is cage-guided. Depending on the size, the radial component is either full-complement or cage-guided.

### YRTS

The axial component and the radial component are guided by a cage.

## 1.8 Internal clearance

Once the bearings have been fitted and fully screw mounted, they are radially and axially clearance-free and preloaded.

## 1.9 Dimensions, tolerances

### YRTA

The tolerances for the main dimensions correspond to tolerance class 6 in accordance with ISO 492 (DIN 620-2).

The tolerances for concentricity and axial runout accuracy can be found in the dimensional tolerances.

#### 2 Dimensional tolerances

| d   | t <sub>Δdmp</sub> |        | D   | t <sub>ΔDmp</sub> |        |
|-----|-------------------|--------|-----|-------------------|--------|
|     | U                 | L      |     | U                 | L      |
| mm  | mm                | mm     | mm  | mm                | mm     |
| 50  | 0                 | -0,008 | 126 | 0                 | -0,011 |
| 80  | 0                 | -0,009 | 146 | 0                 | -0,011 |
| 100 | 0                 | -0,01  | 185 | 0                 | -0,015 |
| 120 | 0                 | -0,01  | 210 | 0                 | -0,015 |
| 150 | 0                 | -0,013 | 240 | 0                 | -0,015 |
| 180 | 0                 | -0,013 | 280 | 0                 | -0,018 |
| 200 | 0                 | -0,015 | 300 | 0                 | -0,018 |
| 260 | 0                 | -0,018 | 385 | 0                 | -0,02  |
| 325 | 0                 | -0,023 | 450 | 0                 | -0,023 |
| 395 | 0                 | -0,023 | 525 | 0                 | -0,028 |
| 460 | 0                 | -0,023 | 600 | 0                 | -0,028 |
| 580 | 0                 | -0,025 | 750 | 0                 | -0,035 |
| 650 | 0                 | -0,038 | 870 | 0                 | -0,05  |

|                   |    |                                                                                                      |
|-------------------|----|------------------------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                                        |
| D                 | mm | Outside diameter                                                                                     |
| L                 | mm | Lower limit deviation                                                                                |
| t <sub>Δdmp</sub> | mm | Deviation of the mean value of the bore diameter from the nominal size in accordance with ISO 492    |
| t <sub>ΔDmp</sub> | mm | Deviation of the mean value of the outside diameter from the nominal size in accordance with ISO 492 |
| U                 | mm | Upper limit deviation                                                                                |

The geometrical and positional tolerances correspond to tolerance class 4 in accordance with ISO 492 (DIN 620-2).

### 3 Mounting dimensions, axial runout and radial runout

| d   | H <sub>1</sub> | t <sub>ΔH1s</sub> |        | H <sub>2</sub> | t <sub>1</sub> <sup>1)</sup> |
|-----|----------------|-------------------|--------|----------------|------------------------------|
|     |                | U                 | L      |                |                              |
| mm  | mm             | mm                | mm     | mm             | μm                           |
| 50  | 20             | 0,025             | -0,025 | 10             | 2                            |
| 80  | 23,35          | 0,025             | -0,025 | 11,7           | 3                            |
| 100 | 25             | 0,025             | -0,025 | 13             | 3                            |
| 120 | 26             | 0,025             | -0,025 | 14             | 3                            |
| 150 | 26             | 0,03              | -0,03  | 14             | 3                            |
| 180 | 29             | 0,03              | -0,03  | 14             | 4                            |
| 200 | 30             | 0,03              | -0,03  | 15             | 4                            |
| 260 | 36,5           | 0,04              | -0,04  | 18,5           | 6                            |
| 325 | 40             | 0,05              | -0,05  | 20             | 6                            |
| 395 | 42,5           | 0,05              | -0,05  | 22,5           | 6                            |
| 460 | 46             | 0,06              | -0,06  | 24             | 6                            |
| 580 | 60             | 0,25              | -0,25  | 30             | 10                           |
| 650 | 76             | 0,25              | -0,25  | 44             | 10                           |

1) for rotating inner ring and rotating outer ring

|                   |    |                                                                                      |
|-------------------|----|--------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                        |
| H <sub>1</sub>    | mm | Contact surface height, outer ring                                                   |
| H <sub>2</sub>    | mm | Contact surface height, outer ring                                                   |
| L                 | mm | Lower limit deviation                                                                |
| t <sub>ΔH1s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>ΔH2s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>1</sub>    | μm | Axial and radial runout, measured on fitted bearing with ideal adjacent construction |
| U                 | mm | Upper limit deviation                                                                |

### YRT, YRTC

The bearing bore may be slightly conical in the delivered condition. This bore shape is typical of the design and results from the preload forces of the radial bearing. The bearing will regain its ideal geometry when fitted.

The geometrical and positional tolerances correspond to tolerance class 4 in accordance with ISO 492 (DIN 620-2).

### 4 Dimensional tolerances

| d   | t <sub>Δdmp</sub> |        | D   | t <sub>ΔDmp</sub> |        |
|-----|-------------------|--------|-----|-------------------|--------|
|     | U                 | L      |     | U                 | L      |
| mm  | mm                | mm     | mm  | mm                | mm     |
| 50  | 0                 | -0,008 | 126 | 0                 | -0,011 |
| 80  | 0                 | -0,009 | 146 | 0                 | -0,011 |
| 100 | 0                 | -0,01  | 185 | 0                 | -0,015 |
| 120 | 0                 | -0,01  | 210 | 0                 | -0,015 |
| 150 | 0                 | -0,013 | 240 | 0                 | -0,015 |
| 180 | 0                 | -0,013 | 280 | 0                 | -0,018 |
| 200 | 0                 | -0,015 | 300 | 0                 | -0,018 |
| 260 | 0                 | -0,018 | 385 | 0                 | -0,02  |
| 325 | 0                 | -0,023 | 450 | 0                 | -0,023 |
| 395 | 0                 | -0,023 | 525 | 0                 | -0,028 |
| 460 | 0                 | -0,023 | 600 | 0                 | -0,028 |

| d    | t <sub>Δdmp</sub> |        | D    | t <sub>ΔDmp</sub> |        |
|------|-------------------|--------|------|-------------------|--------|
|      | U                 | L      |      | U                 | L      |
| mm   | mm                | mm     | mm   | mm                | mm     |
| 580  | 0                 | -0,025 | 750  | 0                 | -0,035 |
| 650  | 0                 | -0,038 | 870  | 0                 | -0,05  |
| 850  | 0                 | -0,05  | 1095 | 0                 | -0,063 |
| 950  | 0                 | -0,05  | 1200 | 0                 | -0,063 |
| 1030 | 0                 | -0,063 | 1300 | 0                 | -0,08  |

|                   |    |                                                                                                      |
|-------------------|----|------------------------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                                        |
| D                 | mm | Outside diameter                                                                                     |
| L                 | mm | Lower limit deviation                                                                                |
| t <sub>Δdmp</sub> | mm | Deviation of the mean value of the bore diameter from the nominal size in accordance with ISO 492    |
| t <sub>ΔDmp</sub> | mm | Deviation of the mean value of the outside diameter from the nominal size in accordance with ISO 492 |
| U                 | mm | Upper limit deviation                                                                                |

5 Mounting dimensions, axial runout and radial runout

| d    | H <sub>1</sub> | t <sub>ΔH1s</sub> |        | H <sub>2</sub> | t <sub>ΔH2s</sub> |        | t <sub>1</sub> <sup>2)</sup> |
|------|----------------|-------------------|--------|----------------|-------------------|--------|------------------------------|
|      |                | U                 | L      |                | U                 | L      |                              |
| mm   | mm             | mm                | mm     | mm             | mm                | mm     | μm                           |
| 50   | 20             | 0,025             | -0,025 | 10             | 0,02              | -0,02  | 2                            |
| 80   | 23,35          | 0,025             | -0,025 | 11,65          | 0,2               | -0,2   | 3                            |
| 100  | 25             | 0,025             | -0,025 | 13             | 0,02              | -0,02  | 3                            |
| 120  | 26             | 0,025             | -0,025 | 14             | 0,2               | -0,2   | 3                            |
| 150  | 26             | 0,03              | -0,03  | 14             | 0,02              | -0,02  | 3                            |
| 180  | 29             | 0,03              | -0,03  | 14             | 0,025             | -0,025 | 4                            |
| 200  | 30             | 0,03              | -0,03  | 15             | 0,025             | -0,025 | 4                            |
| 260  | 36,5           | 0,04              | -0,04  | 18,5           | 0,025             | -0,025 | 6                            |
| 325  | 40             | 0,05              | -0,05  | 20             | 0,025             | -0,025 | 6                            |
| 395  | 42,5           | 0,05              | -0,05  | 22,5           | 0,025             | -0,025 | 6                            |
| 460  | 46             | 0,06              | -0,06  | 24             | 0,03              | -0,03  | 6                            |
| 580  | 60             | 0,25              | -0,25  | 30             | 0,25              | -0,25  | 10                           |
| 650  | 78             | 0,25              | -0,25  | 44             | 0,25              | -0,25  | 10                           |
| 850  | 80,5           | 0,3               | -0,3   | 43,5           | 0,3               | -0,3   | 12                           |
| 950  | 86             | 0,3               | -0,3   | 46             | 0,3               | -0,3   | 12                           |
| 1030 | 92,5           | 0,3               | -0,3   | 52,5           | 0,3               | -0,3   | 12                           |

<sup>2)</sup> for rotating inner ring and rotating outer ring

|                   |    |                                                                                      |
|-------------------|----|--------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                        |
| H <sub>1</sub>    | mm | Contact surface height, outer ring                                                   |
| H <sub>2</sub>    | mm | Contact surface height, outer ring                                                   |
| L                 | mm | Lower limit deviation                                                                |
| t <sub>ΔH1s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>ΔH2s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>1</sub>    | μm | Axial and radial runout, measured on fitted bearing with ideal adjacent construction |
| U                 | mm | Upper limit deviation                                                                |

For a restricted version with bore diameters > 460 mm, please contact Schaeffler.

### 6 Mounting dimensions, axial runout and radial runout; restricted version

| d    | H <sub>1</sub> | t <sub>ΔH1s</sub> <sup>3)</sup> |        | H <sub>2</sub> | t <sub>ΔH2s</sub> <sup>3)</sup> |        | t <sub>1</sub> <sup>4)</sup> |
|------|----------------|---------------------------------|--------|----------------|---------------------------------|--------|------------------------------|
|      |                | U                               | L      |                | U                               | L      |                              |
| mm   | mm             | mm                              | mm     | mm             | mm                              | mm     | μm                           |
| 50   | 20             | 0,025                           | -0,025 | 10             | 0,02                            | -0,02  | 1                            |
| 80   | 23,35          | 0,025                           | -0,025 | 11,65          | 0,2                             | -0,2   | 1,5                          |
| 100  | 25             | 0,025                           | -0,025 | 13             | 0,02                            | -0,02  | 1,5                          |
| 120  | 26             | 0,025                           | -0,025 | 14             | 0,2                             | -0,2   | 1,5                          |
| 150  | 26             | 0,03                            | -0,03  | 14             | 0,02                            | -0,02  | 1,5                          |
| 180  | 29             | 0,03                            | -0,03  | 14             | 0,025                           | -0,025 | 2                            |
| 200  | 30             | 0,03                            | -0,03  | 15             | 0,025                           | -0,025 | 2                            |
| 260  | 36,5           | 0,04                            | -0,04  | 18,5           | 0,025                           | -0,025 | 3                            |
| 325  | 40             | 0,05                            | -0,05  | 20             | 0,025                           | -0,025 | 3                            |
| 395  | 42,5           | 0,05                            | -0,05  | 22,5           | 0,025                           | -0,025 | 3                            |
| 460  | 46             | 0,06                            | -0,06  | 24             | 0,03                            | -0,03  | 3                            |
| 580  | 60             | 0,075                           | -0,075 | 30             | 0,03                            | -0,03  | 5                            |
| 650  | 78             | 0,1                             | -0,1   | 44             | 0,03                            | -0,03  | 5                            |
| 850  | 80,5           | 0,12                            | -0,12  | 43,5           | 0,03                            | -0,03  | 6                            |
| 950  | 86             | 0,3                             | -0,3   | 46             | 0,03                            | -0,03  | 6                            |
| 1030 | 92,5           | 0,15                            | -0,15  | 52,5           | 0,03                            | -0,03  | 6                            |

3) special design with suffix H1 or H2

4) for rotating inner ring and rotating outer ring, suffix PRL50

|                   |    |                                                                                      |
|-------------------|----|--------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                        |
| H <sub>1</sub>    | mm | Contact surface height, outer ring                                                   |
| H <sub>2</sub>    | mm | Contact surface height, outer ring                                                   |
| L                 | mm | Lower limit deviation                                                                |
| t <sub>ΔH1s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>ΔH2s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>1</sub>    | μm | Axial and radial runout, measured on fitted bearing with ideal adjacent construction |
| U                 | mm | Upper limit deviation                                                                |

### YRTS

The bearing bore may be slightly conical in the delivered condition. This bore shape is typical of the design and results from the preload forces of the radial bearing. The bearing will regain its ideal geometry when fitted.

The dimensional tolerances are derived from tolerance class 5.

### 7 Dimensional tolerances

| d   | t <sub>Δdmp</sub> |        | D   | t <sub>ΔDmp</sub> |        |
|-----|-------------------|--------|-----|-------------------|--------|
|     | U                 | L      |     | U                 | L      |
| mm  | mm                | mm     | mm  | mm                | mm     |
| 200 | 0                 | -0,015 | 300 | 0                 | -0,018 |
| 260 | 0                 | -0,018 | 385 | 0                 | -0,02  |
| 325 | 0                 | -0,023 | 450 | 0                 | -0,023 |
| 395 | 0                 | -0,023 | 525 | 0                 | -0,028 |
| 460 | 0                 | -0,023 | 600 | 0                 | -0,028 |
| 580 | 0                 | -0,025 | 750 | 0                 | -0,035 |
| 650 | 0                 | -0,038 | 870 | 0                 | -0,05  |

|   |    |                       |
|---|----|-----------------------|
| d | mm | Bore diameter         |
| D | mm | Outside diameter      |
| L | mm | Lower limit deviation |

|                  |    |                                                                                                      |
|------------------|----|------------------------------------------------------------------------------------------------------|
| $t_{\Delta dmp}$ | mm | Deviation of the mean value of the bore diameter from the nominal size in accordance with ISO 492    |
| $t_{\Delta Dmp}$ | mm | Deviation of the mean value of the outside diameter from the nominal size in accordance with ISO 492 |
| U                | mm | Upper limit deviation                                                                                |

The geometrical and positional tolerances correspond to tolerance class 4 in accordance with ISO 492 (DIN 620-2).

8 Mounting dimensions, axial runout and radial runout

| d   | H <sub>1</sub> | t <sub>ΔH1s</sub> |       | H <sub>2</sub> | t <sub>1</sub>       |                          |
|-----|----------------|-------------------|-------|----------------|----------------------|--------------------------|
|     |                | U                 | L     |                | Normal <sup>5)</sup> | Restricted <sup>6)</sup> |
| mm  | mm             | mm                | mm    | mm             | μm                   | μm                       |
| 200 | 30             | 0,04              | -0,06 | 15             | 4                    | 2                        |
| 260 | 36,5           | 0,05              | -0,07 | 18,5           | 6                    | 3                        |
| 325 | 40             | 0,06              | -0,07 | 20             | 6                    | 3                        |
| 395 | 42,5           | 0,06              | -0,07 | 22,5           | 6                    | 3                        |
| 460 | 46             | 0,07              | -0,08 | 24             | 6                    | 3                        |
| 580 | 60             | 0,06              | -0,11 | 30             | 10                   | 5                        |
| 650 | 78             | 0,11              | -0,11 | 44             | 10                   | 5                        |

<sup>5)</sup> for rotating inner ring and rotating outer ring

<sup>6)</sup> for rotating inner ring only, suffix PRL50/IR

|                   |    |                                                                                      |
|-------------------|----|--------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                        |
| H <sub>1</sub>    | mm | Contact surface height, outer ring                                                   |
| H <sub>2</sub>    | mm | Contact surface height, outer ring                                                   |
| L                 | mm | Lower limit deviation                                                                |
| t <sub>1</sub>    | μm | Axial and radial runout, measured on fitted bearing with ideal adjacent construction |
| t <sub>ΔH1s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| U                 | mm | Upper limit deviation                                                                |

ZKLDF

The geometrical and positional tolerances correspond to tolerance class 4 in accordance with ISO 492 (DIN 620-2).

9 Dimensional tolerances

| d   | t <sub>Δdmp</sub> |        | D   | t <sub>ΔDmp</sub> |        |
|-----|-------------------|--------|-----|-------------------|--------|
|     | U                 | L      |     | U                 | L      |
| mm  | mm                | mm     | mm  | mm                | mm     |
| 100 | 0                 | -0,01  | 185 | 0                 | -0,015 |
| 120 | 0                 | -0,01  | 210 | 0                 | -0,015 |
| 150 | 0                 | -0,013 | 240 | 0                 | -0,015 |
| 180 | 0                 | -0,013 | 280 | 0                 | -0,018 |
| 200 | 0                 | -0,015 | 300 | 0                 | -0,018 |
| 260 | 0                 | -0,018 | 385 | 0                 | -0,02  |
| 325 | 0                 | -0,023 | 450 | 0                 | -0,023 |
| 395 | 0                 | -0,023 | 525 | 0                 | -0,028 |
| 460 | 0                 | -0,023 | 600 | 0                 | -0,028 |

|                   |    |                                                                                                   |
|-------------------|----|---------------------------------------------------------------------------------------------------|
| d                 | mm | Bore diameter                                                                                     |
| D                 | mm | Outside diameter                                                                                  |
| L                 | mm | Lower limit deviation                                                                             |
| t <sub>Δdmp</sub> | mm | Deviation of the mean value of the bore diameter from the nominal size in accordance with ISO 492 |

|                  |    |                                                                                                      |
|------------------|----|------------------------------------------------------------------------------------------------------|
| $t_{\Delta Dmp}$ | mm | Deviation of the mean value of the outside diameter from the nominal size in accordance with ISO 492 |
| U                | mm | Upper limit deviation                                                                                |

10 Mounting dimensions, axial runout and radial runout


| d   | H <sub>1</sub> | t <sub>ΔH1s</sub> |        | t <sub>1</sub>       |
|-----|----------------|-------------------|--------|----------------------|
|     |                | U                 | L      | Normal <sup>7)</sup> |
| mm  | mm             | mm                | mm     | μm                   |
| 100 | 25             | 0,175             | -0,175 | 3                    |
| 120 | 26             | 0,175             | -0,175 | 3                    |
| 150 | 26             | 0,175             | -0,175 | 3                    |
| 180 | 29             | 0,175             | -0,175 | 4                    |
| 200 | 30             | 0,175             | -0,175 | 4                    |
| 260 | 36,5           | 0,2               | -0,2   | 6                    |
| 325 | 40             | 0,2               | -0,2   | 6                    |
| 395 | 42,5           | 0,2               | -0,2   | 6                    |
| 460 | 46             | 0,225             | -0,225 | 6                    |

<sup>7)</sup> for rotating inner ring and rotating outer ring

|                   |    |                                                                                      |
|-------------------|----|--------------------------------------------------------------------------------------|
| U                 | mm | Upper limit deviation                                                                |
| L                 | mm | Lower limit deviation                                                                |
| d                 | mm | Bore diameter                                                                        |
| H <sub>1</sub>    | mm | Contact surface height, outer ring                                                   |
| t <sub>ΔH1s</sub> | mm | Deviation of height from nominal size in accordance with ISO 492                     |
| t <sub>1</sub>    | μm | Axial and radial runout, measured on fitted bearing with ideal adjacent construction |

## 1.10 Structure of the ordering designation

11 Structure of the ordering designation for axial/radial bearings YRTA

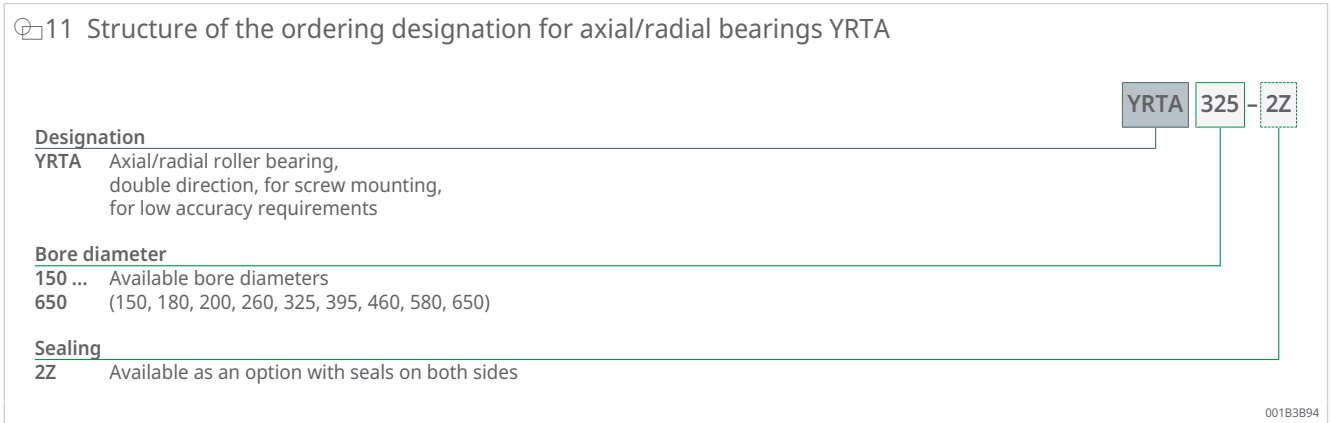

12 Structure of the ordering designation for axial/radial bearings YRT



**Designation**

**YRT** Axial/radial roller bearing, double direction, for screw mounting

**Bore diameter**

**50 ...** Available bore diameters  
**80** (50, 80)

**Cage**

- Standard cage (for YRT50)  
**TV** Cage made from glass fibre reinforced polyamide 66 (for YRT80)

**L-section ring**

- For mounting with unsupported L-section ring  
**VSP** For mounting with axially supported L-section ring

**Axial runout and radial runout**

- Standard design  
**PRL50** Restricted axial runout and radial runout tolerances for rotating inner ring and outer ring

001BFDB2

13 Structure of the ordering designation for axial/radial bearings YRTC



**Designation**

**YRTC** Axial/radial roller bearing, double direction, for screw mounting

**Bore diameter**

**100 ...** Available bore diameters  
**1030** (100, 120, 150, 180, 200, 260, 325, 395, 460, 580, 650, 850, 950, 1030)

**Premium brand**

**XL** X-life

**L-section ring**

- For mounting with unsupported L-section ring  
**VSP** For mounting with axially supported L-section ring

**Axial runout and radial runout**

- Standard design  
**PLR50** Restricted axial runout and radial runout tolerances for rotating inner ring and outer ring  
 Bore diameter > 460 mm: by agreement

**Mounting dimension H1**

- Standard design  
**H1** Restricted version, with tighter mounting dimension tolerances

**Mounting dimension H2**

- Standard design  
**H2** Restricted version, with tighter mounting dimension tolerances

001BFDC5

14 Structure of the ordering designation for axial/radial bearings YRTS

**Designation**

**YRTS** Axial/radial roller bearing, double direction, for screw mounting, for higher speeds

**Bore diameter**

**200 ...** Available bore diameters

**650** (200, 260, 325, 395, 460, 580, 650)

**Premium brand**

**XL** X-life (for bore diameters 580 and 650)

**Axial runout and radial runout**

**-** Standard design

**PLR50/IR** Restricted axial runout and radial runout tolerances for rotating inner ring



001BFDD5

15 Structure of the ordering designation for axial/radial bearings ZKLDF

**Designation**

**ZKLDF** Axial angular contact ball bearing, double direction, for screw mounting

**Bore diameter**

**100 ...** Available bore diameters

**460** (100, 120, 150, 180, 200, 260, 325, 395, 460)



001BFDE5

## 1.11 Dimensioning

### 1.11.1 Basic rating life

The load carrying capacity and life must be verified for the radial and axial bearing components.

For verification of the basic rating life, please contact Schaeffler, stating the speed, load and duty cycle.

### 1.11.2 Static load safety factor

The static load safety factor  $S_0$  indicates the security against impermissible permanent deformations in the bearing.

$f_1$

$$S_0 = \frac{C_{0r}}{F_{0r}}$$

|          |   |                                            |
|----------|---|--------------------------------------------|
| $C_{0r}$ | N | Basic static load rating, radial           |
| $F_{0r}$ | N | Largest radial load present (maximum load) |
| $S_0$    | - | Static load safety factor                  |

$$S_0 = \frac{C_{0a}}{F_{0a}}$$

|          |   |                                           |
|----------|---|-------------------------------------------|
| $C_{0a}$ | N | Basic static load rating, axial           |
| $F_{0a}$ | N | Largest axial load present (maximum load) |
| $S_0$    | - | Static load safety factor                 |

**!** In machine tools and similar areas of application,  $S_0$  should be  $> 4$ .


### 1.11.3 Static limiting load diagrams

The static limiting load diagram can be used for the following purposes:

- rapid checking of the selected bearing size under predominantly static load
- calculation of the tilting moment  $M_k$  that can be supported by the bearing in addition to the axial load

The static limiting load diagram takes into account a static load safety factor  $S_0 \geq 4$  for the rolling element set, as well as the strength of the screws and the bearing ring.


16 Example of a static limiting load diagram

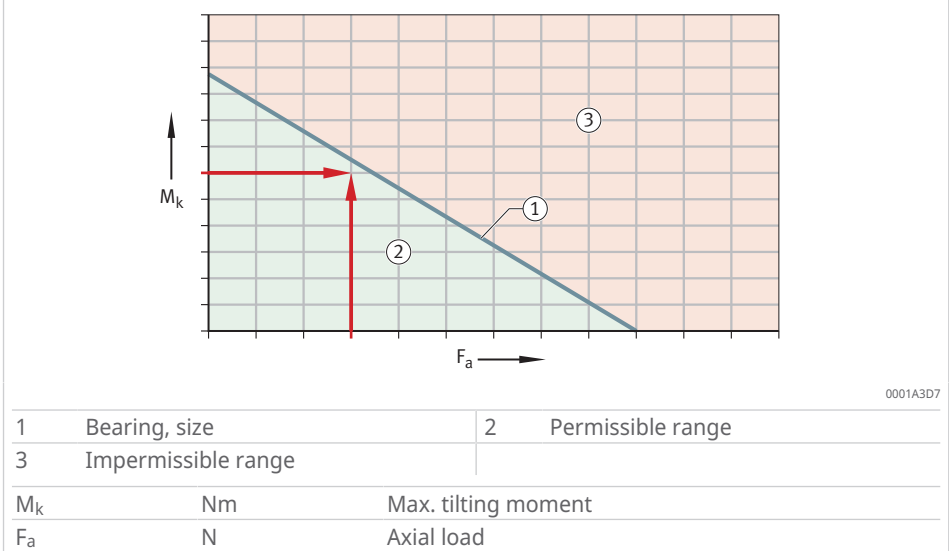

**!** The static limiting load must not be exceeded when dimensioning the bearing arrangement.

YRTA


17 Static limiting load diagram for YRTA150 to YRTA200

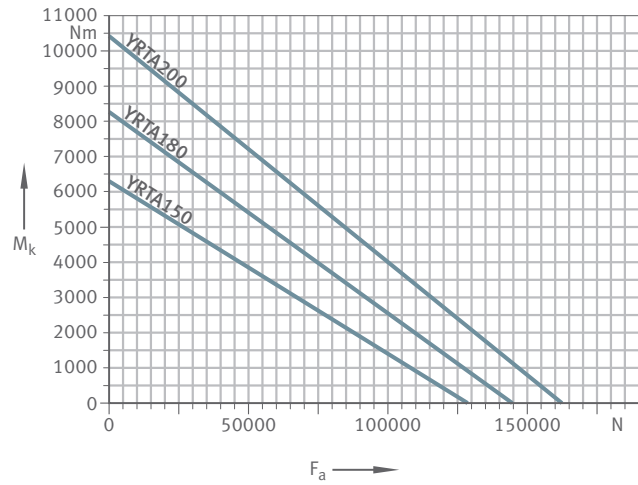

001B33FA

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |


18 Static limiting load diagram for YRTA260 to YRTA460

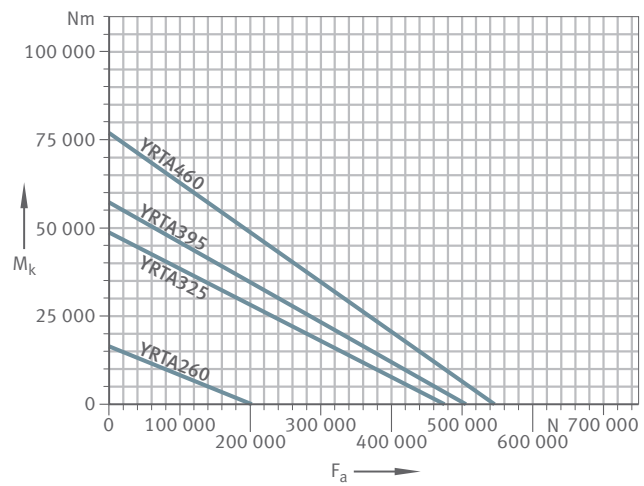

001B340A

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |

19 Static limiting load diagram for YRTA580 to YRTA650

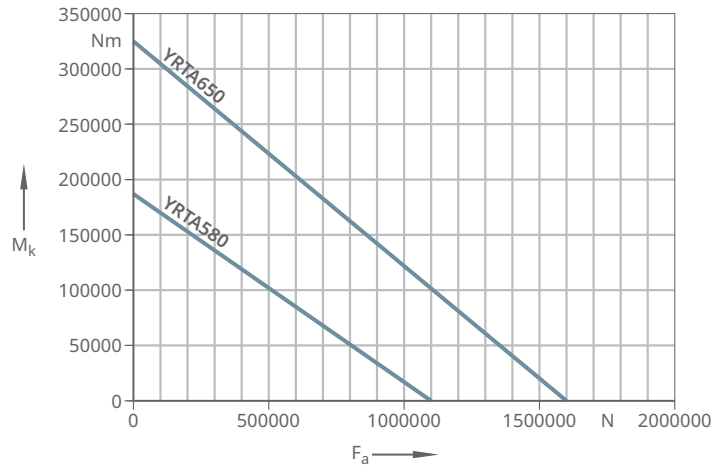


001BE389

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |

YRT, YRTC


20 Static limiting load diagram for YRT50 to YRTC200

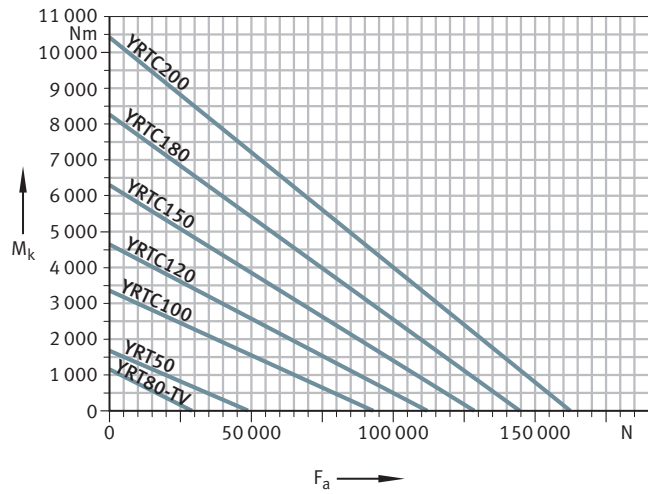

0019546C

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |


21 Static limiting load diagram for YRTC260 to YRTC460

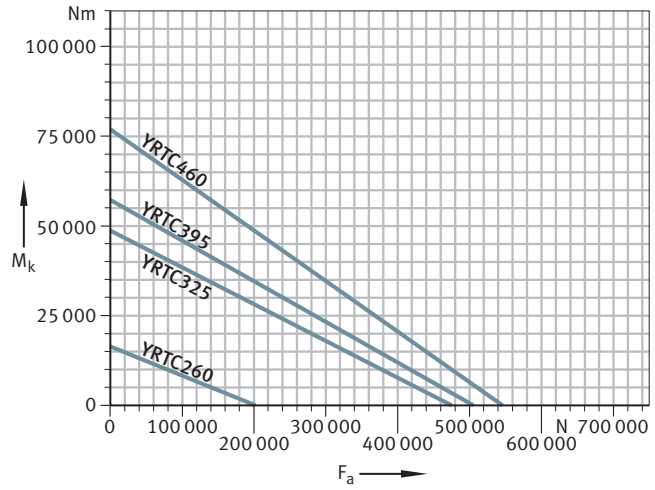

0019548C

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |


22 Static limiting load diagram for YRTC580 to YRTC850

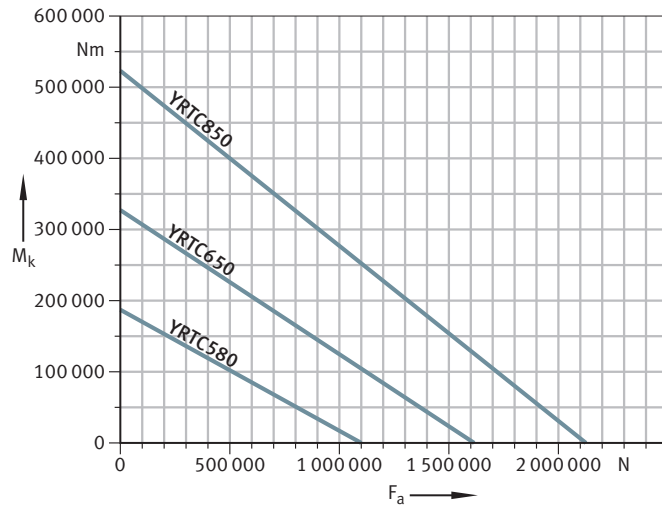

0019549F

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |

23 Static limiting load diagram for YRTC950 to YRTC1030

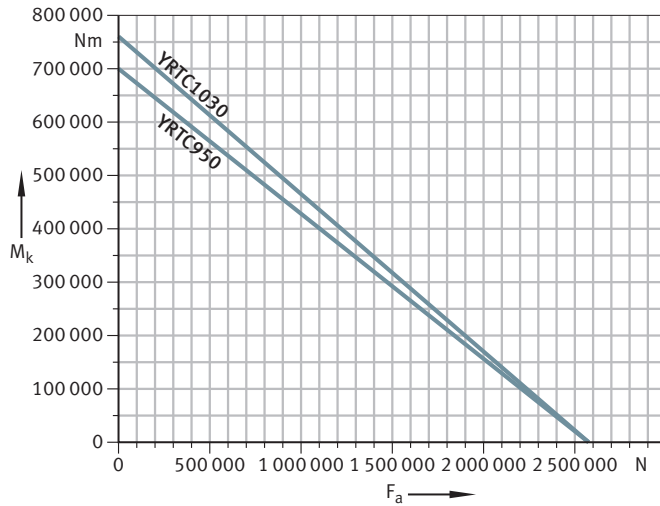


001954AF

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |

YRTS


24 Static limiting load diagram for YRTS200 to YRTS460

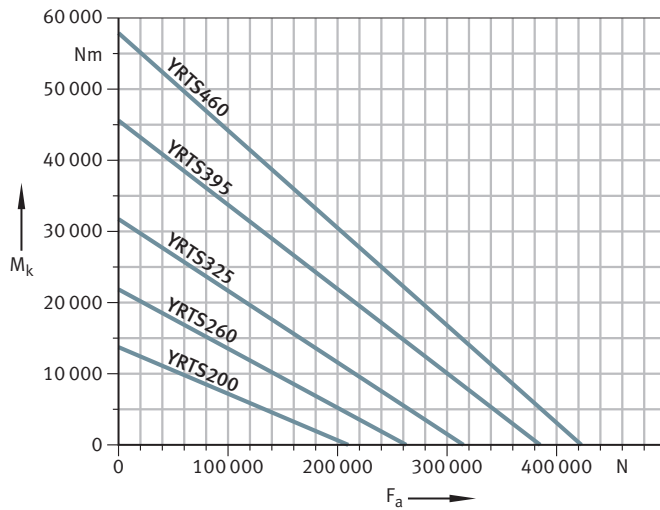

0009B0AF

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |

25 Static limiting load diagram for YRTS580-XL and YRTS650-XL

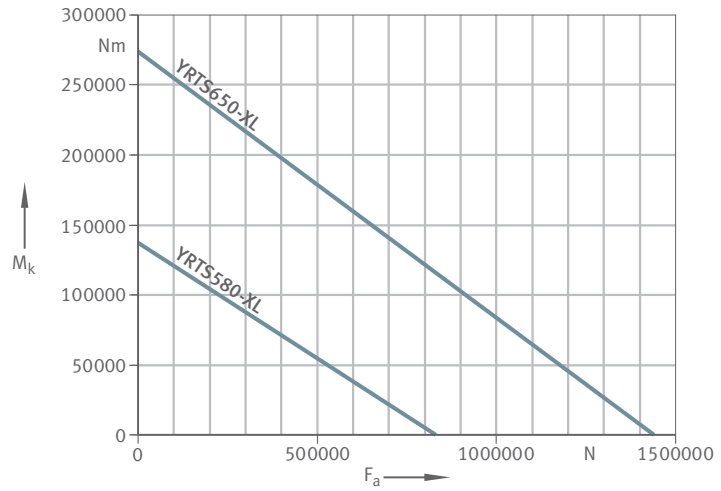


001B3334

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |


ZKLDF

26 Static limiting load diagram for ZKLDF100 to ZKLDF200

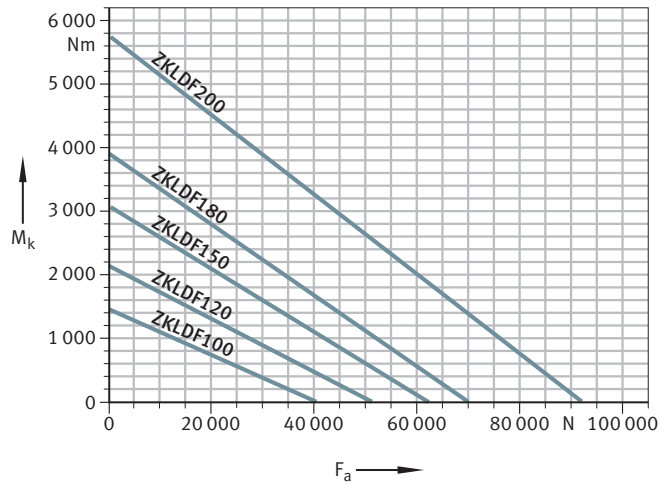

0001A344

|       |    |                     |
|-------|----|---------------------|
| $M_k$ | Nm | Max. tilting moment |
| $F_a$ | N  | Axial load          |

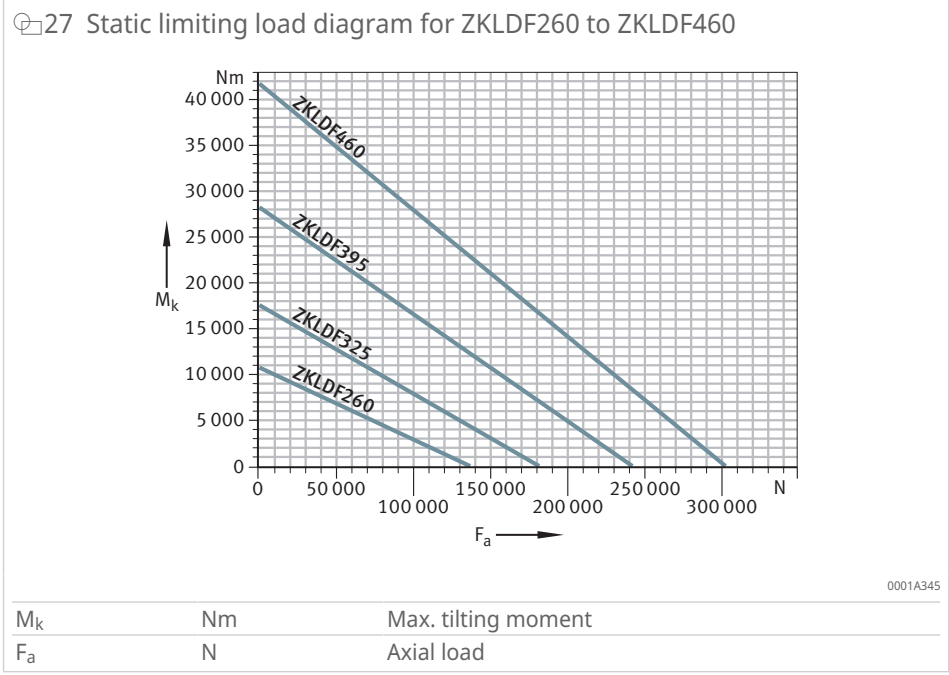

### 1.11.4 Frictional torque

The frictional torque  $M_R$  is influenced by the lubricant viscosity, the quantity of lubricant and the bearing preload.

- The lubricant viscosity is dependent on the operating temperature and lubricant grade.
- When relubrication is carried out, the lubricant quantity temporarily increases until the grease has been distributed and the excess quantity has left the bearing.
- The bearing preload is dependent on the mounting fits, the geometrical accuracy of the adjacent parts, the temperature difference between the inner and outer ring, the tightening torque of the screws and the mounting situation.

During initial operation and after relubrication, bearing friction is increased until the lubricant has been distributed within the bearing.

#### YRTA

The guide values for the frictional torques for axial/radial bearings were determined at a measurement speed  $n = 5 \text{ min}^{-1}$ .

#### YRT, YRTC


The guide values for the frictional torques for axial/radial bearings were determined at a measurement speed  $n = 5 \text{ min}^{-1}$ .

**!** Variations in the tightening torque of the fixing screws will have a detrimental effect on the preload and the frictional torque. For YRT bearings, it must be taken into consideration that the frictional torque can increase by a factor of 2 to 2,5 with increasing speed.

### YRTS

The stated frictional torques  $M_R$  are statistically determined guide values for bearings with grease lubrication measured after a grease distribution cycle and at an operating temperature  $\vartheta = +50\text{ }^\circ\text{C}$ .

☞ 28 Frictional torques as guide values for YRTS, statistically determined values from series of measurements

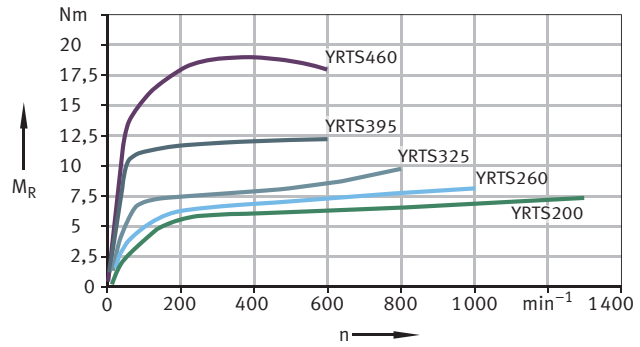

00018405


|       |                   |                   |
|-------|-------------------|-------------------|
| $M_R$ | Nm                | Frictional torque |
| n     | $\text{min}^{-1}$ | Speed             |

The guide values for the frictional torques for axial/radial bearings YRTS580-XL (21 Nm) and YRTS650-XL (42 Nm) were determined at a measurement speed  $n = 5\text{ min}^{-1}$ .

### ZKLDF

The stated frictional torques  $M_R$  are statistically determined guide values for bearings with grease lubrication measured after a grease distribution cycle and at an operating temperature  $\vartheta = +50\text{ }^\circ\text{C}$ .

☞ 29 Frictional torques as guide values for ZKLDF, statistically determined values from series of measurements

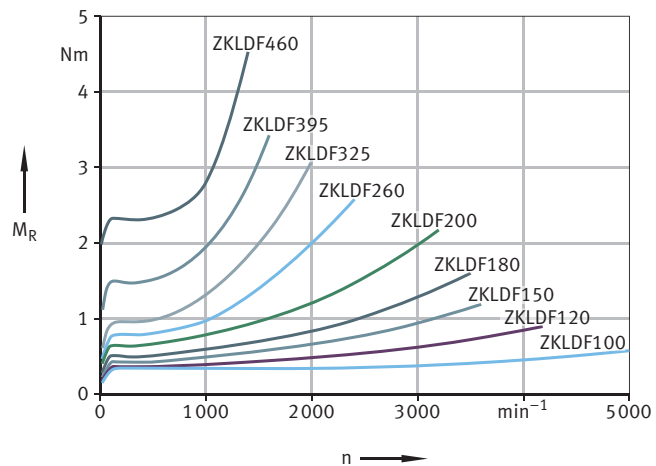


000183B0

|       |                   |                   |
|-------|-------------------|-------------------|
| $M_R$ | Nm                | Frictional torque |
| n     | $\text{min}^{-1}$ | Speed             |

## 1.12 Design of the adjacent construction

**!** Geometrical defects in the screw mounting surfaces and fits will influence the running accuracy, preload and running characteristics of the bearing arrangement. The accuracy of the adjacent surfaces must therefore be matched to the accuracy requirement of the entire assembly.

Design adjacent construction in accordance with the requirements for the adjacent construction ▶32 | 30.

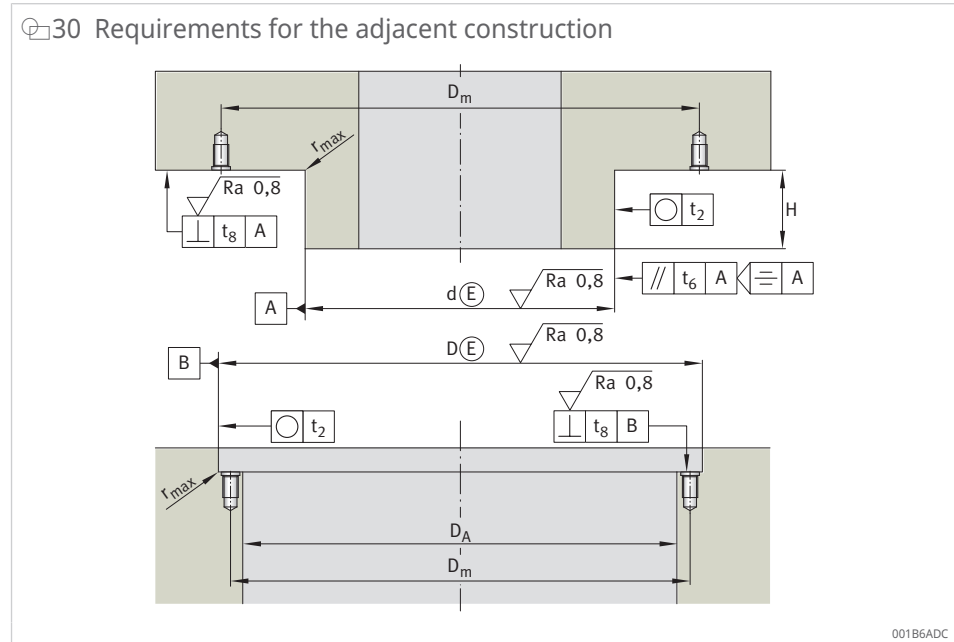

Maintain tolerances according to required geometrical and positional accuracy ▶35 | 1.12.6. Any deviations from the specified tolerances will influence the bearing frictional torque, running accuracy and running characteristics.

Select values for the maximum corner radii of the fit surfaces according to the required form and positional accuracy ▶35 | 13.

### 1.12.1 Fits

The selection of fits leads to transition fits, meaning that, depending on the actual dimension of the bearing diameter and mounting dimensions, either clearance fits or interference fits can arise.

**!** The fit influences, for example, the running accuracy of the bearing and its dynamic characteristics. For easier matching of the adjacent construction to the actual dimensions, each bearing is supplied with a measurement record.

An excessively tight fit and the resulting increase in radial bearing preload can lead to the following disadvantages:

- Increased bearing friction, bearing temperature and stress on the raceway system, resulting in higher wear.
- Reduction in the achievable speed and service life.

### 1.12.2 Axial and radial runout accuracy of the bearing arrangement

The axial and radial runout accuracy is influenced by:

- the running accuracy of the bearing
- the geometrical accuracy of the adjacent surfaces
- the fit between the rotating bearing ring and adjacent component



For very high running accuracy, the rotating bearing ring should ideally have a fit clearance of 0 and it should be ensured that the bearing has preload in operation.

### 1.12.3 Fit recommendations for shafts

If there are special requirements, the fit clearance must be further restricted within the stated tolerance zones.

#### Requirements for running accuracy

Where maximum running accuracy is required and the inner ring is rotating, the fit clearance should be as close as possible to 0. Otherwise, the fit clearance may increase the radial runout.

#### Requirements for dynamic characteristics

- For swivel-type operation ( $n \cdot d_M < 35000 \text{ min}^{-1} \cdot \text{mm}$ , duty cycle ED < 10 %) the shaft should be produced to tolerance class h5 ⑤.
- YRTC, ZKLDF: For higher speeds and longer duty cycles, the fit interference must not exceed 0,01 mm.
- YRTS: For higher speeds and longer duty cycles, the fit interference must not exceed 0,005 mm.
- ZKLDF: The fit dimension should be based on the inner ring with the smallest bore dimension in accordance with the measurement record supplied.

#### YRTA

The shaft should be produced to tolerance class h5 ⑤.

#### YRT, YRTC

The shaft should be produced to tolerance class h5 ⑤.

#### YRTS

☞11 Fit recommendation for shaft, series YRTS

| Designation | d   | t <sub>Δdmp</sub> |        |
|-------------|-----|-------------------|--------|
|             |     | U                 | L      |
|             | mm  | mm                | mm     |
| YRTS200     | 200 | -0,01             | -0,024 |
| YRTS260     | 260 | -0,013            | -0,029 |
| YRTS325     | 325 | -0,018            | -0,036 |
| YRTS395     | 395 | -0,018            | -0,036 |
| YRTS460     | 460 | -0,018            | -0,038 |
| YRTS580-XL  | 580 | -0,02             | -0,042 |
| YRTS650-XL  | 650 | -0,033            | -0,058 |

d mm Bore diameter

t<sub>Δdmp</sub> mm Deviation of the mean value of the bore diameter from the nominal size in accordance with ISO 492

|   |    |                       |
|---|----|-----------------------|
| U | mm | Upper limit deviation |
| L | mm | Lower limit deviation |

**ZKLDF**

The shaft should be produced to tolerance class h5 <sup>Ⓔ</sup>.

1.12.4 Fit recommendations for housings

Requirements for running accuracy

Where maximum running accuracy is required and the outer ring is rotating, the fit clearance should be as close as possible to 0. With a static bearing outer ring, a clearance fit or a design without radial centring should be selected.

Requirements for dynamic characteristics

- For predominantly swivel-type operation ( $n \cdot d_M < 35000 \text{ min}^{-1} \cdot \text{mm}$ , duty cycle ED < 10 %) and a rotating bearing outer ring, the housing fit should be produced to tolerance class J6 <sup>Ⓔ</sup>.
- YRTS: For higher speeds and longer duty cycles, a thermal FE calculation of the assembly must be carried out.

YRTA

The housing should be produced to tolerance class J6 <sup>Ⓔ</sup>.

YRT, YRTC

The housing should be produced to tolerance class J6 <sup>Ⓔ</sup>.

YRTS

12 Fit recommendation for housing bore, series YRTS

| Designation | D   | t <sub>ΔDmp</sub> |        |
|-------------|-----|-------------------|--------|
|             |     | U                 | L      |
|             | mm  | mm                | mm     |
| YRTS200     | 300 | +0,011            | -0,005 |
| YRTS260     | 385 | +0,013            | -0,005 |
| YRTS325     | 450 | +0,015            | -0,005 |
| YRTS395     | 525 | +0,017            | -0,005 |
| YRTS460     | 600 | +0,017            | -0,005 |
| YRTS580-XL  | 750 | +0,02             | -0,005 |
| YRTS650-XL  | 870 | +0,024            | -0,005 |

|                   |    |                                                                                                      |
|-------------------|----|------------------------------------------------------------------------------------------------------|
| D                 | mm | Outside diameter                                                                                     |
| t <sub>ΔDmp</sub> | mm | Deviation of the mean value of the outside diameter from the nominal size in accordance with ISO 492 |
| U                 | mm | Upper limit deviation                                                                                |
| L                 | mm | Lower limit deviation                                                                                |

**!** If thermal FE calculations of the assembly show a higher temperature at the shaft and bearing inner ring than at the bearing outer ring, it may be advantageous not to centre the bearing outer ring radially or to produce the housing fit as a clearance fit with at least 0,02 mm clearance. This will reduce the increase in preload that occurs where there is a temperature differential

between the inner ring and outer ring of the bearing. However, if the temperature differential is too great, this may lead to overloading of the outer ring screw connections and the screw connection will start to slip. This may result in radial clearance in the bearing arrangement when the machine is cold.

If thermal FE calculations of the assembly at the bearing outer ring show an identical or higher temperature in relation to the inner ring, then the housing should be designed in accordance with the fit recommendations for the shaft and housing bore for YRTS.

### ZKLDF

The housing should be produced to tolerance class J6 <sup>Ⓔ</sup>.

#### 1.12.5 Fit selection depending on the screw connection of the bearing rings

If the bearing outer ring is screw mounted on the static component, a fit seating is not required or can be produced as stated. If the values in the table are used, this will give a transition fit with a tendency towards a clearance fit. This generally allows easy fitting.

If the bearing inner ring is screw mounted on the static component, it should nevertheless be supported by the shaft over the whole bearing height for functional reasons. The mounting dimensions should then be selected accordingly. If these values in the table are used, this will give a transition fit with a tendency towards a clearance fit.

#### 1.12.6 Geometrical and positional accuracy of the adjacent construction

The values stated for the geometrical and positional accuracy of the adjacent construction have proved effective in practice and are adequate for the majority of applications.



The geometrical tolerances influence the axial and radial runout accuracy of the assembly as well as the bearing frictional torque and the running characteristics.

☒13 Maximum undercut radius of fit surfaces for YRTA, YRTC, YRTS and ZKLDF

| d    |       | r <sub>a</sub> |
|------|-------|----------------|
| from | up to | max.           |
| mm   | mm    | mm             |
| 50   | 200   | 0,1            |
| 200  | 580   | 0,3            |
| 460  | 1030  | 1              |

d                      mm                      Bore diameter  
r<sub>a</sub>                      mm                      Undercut radius

### YRTA

14 Geometrical and positional accuracy for shafts for YRTA

| Designation         | t <sub>2</sub> | t <sub>6</sub> | t <sub>8</sub> |
|---------------------|----------------|----------------|----------------|
|                     | µm             | µm             | µm             |
| YRTA50 ... YRTA120  | 6              | 3              | 6              |
| YRTA150 ... YRTA200 | 9              | 5              | 9              |
| YRTA260 ... YRTA460 | 12             | 7              | 12             |
| YRTA580             | 13             | 7              | 13             |
| YRTA650             | 15             | 8              | 15             |

t<sub>2</sub>                    µm                    Roundness tolerance  
 t<sub>6</sub>                    µm                    Parallelism tolerance  
 t<sub>8</sub>                    µm                    Perpendicularity tolerance

15 Geometrical and positional accuracy for housings for YRTA

| Designation         | t <sub>2</sub> | t <sub>8</sub> |
|---------------------|----------------|----------------|
|                     | µm             | µm             |
| YRTA50 ... YRTA120  | 6              | 6              |
| YRTA150 ... YRTA200 | 9              | 9              |
| YRTA260 ... YRTA460 | 12             | 12             |
| YRTA580             | 13             | 13             |
| YRTA650             | 15             | 15             |

t<sub>2</sub>                    µm                    Roundness tolerance  
 t<sub>8</sub>                    µm                    Perpendicularity tolerance

### YRT, YRTC

16 Diameter tolerances and geometric tolerances for shafts for YRTC, tolerance class h5 <sup>Ⓔ</sup>

| d    |       |    |     | t <sub>2</sub> | t <sub>6</sub> | t <sub>8</sub> |
|------|-------|----|-----|----------------|----------------|----------------|
| over | up to | U  | L   |                |                |                |
| mm   | mm    | µm | µm  | µm             | µm             | µm             |
| 50   | 80    | 0  | -13 | 3              | 1,5            | 3              |
| 80   | 120   | 0  | -15 | 4              | 2              | 4              |
| 120  | 180   | 0  | -18 | 5              | 2,5            | 5              |
| 180  | 250   | 0  | -20 | 7              | 3,5            | 7              |
| 250  | 315   | 0  | -23 | 8              | 4              | 8              |
| 315  | 400   | 0  | -25 | 9              | 4,5            | 9              |
| 400  | 500   | 0  | -27 | 10             | 5              | 10             |
| 500  | 630   | 0  | -32 | 11             | 5,5            | 11             |
| 630  | 800   | 0  | -36 | 13             | 6,5            | 13             |
| 800  | 1000  | 0  | -40 | 15             | 7,5            | 15             |
| 1000 | 1250  | 0  | -47 | 18             | 9              | 18             |

d                    mm                    Bore diameter  
 U                    mm                    Upper limit deviation  
 L                    mm                    Lower limit deviation  
 t<sub>2</sub>                    µm                    Roundness tolerance  
 t<sub>6</sub>                    µm                    Parallelism tolerance  
 t<sub>8</sub>                    µm                    Perpendicularity tolerance

### 17 Diameter tolerances and geometric tolerances for housings for YRTC, tolerance class J6 <sup>Ⓔ</sup>

| D    |       |     |     | t <sub>2</sub> | t <sub>8</sub> |
|------|-------|-----|-----|----------------|----------------|
| over | up to | U   | L   |                |                |
| mm   | mm    | μm  | μm  | μm             | μm             |
| 120  | 180   | +18 | -7  | 5              | 5              |
| 180  | 250   | +22 | -7  | 7              | 7              |
| 250  | 315   | +25 | -7  | 8              | 8              |
| 315  | 400   | +29 | -7  | 9              | 9              |
| 400  | 500   | +33 | -7  | 10             | 10             |
| 500  | 630   | +34 | -10 | 11             | 11             |
| 630  | 800   | +38 | -12 | 13             | 13             |
| 800  | 1000  | +44 | -12 | 15             | 15             |
| 1000 | 1250  | +52 | -14 | 18             | 18             |

|                |    |                            |
|----------------|----|----------------------------|
| D              | mm | Outside diameter           |
| U              | mm | Upper limit deviation      |
| L              | mm | Lower limit deviation      |
| t <sub>2</sub> | μm | Roundness tolerance        |
| t <sub>8</sub> | μm | Perpendicularity tolerance |

### YRTS

#### 18 Geometrical and positional accuracy for shafts for YRTS

| Designation               | t <sub>2</sub> | t <sub>6</sub> | t <sub>8</sub> |
|---------------------------|----------------|----------------|----------------|
|                           | μm             | μm             | μm             |
| YRTS200                   | 6              | 2,5            | 5              |
| YRTS260 ... YRTS460       | 8              | 2,5            | 7              |
| YRTS580-XL ... YRTS650-XL | 10             | 4              | 10             |

|                |    |                            |
|----------------|----|----------------------------|
| t <sub>2</sub> | μm | Roundness tolerance        |
| t <sub>6</sub> | μm | Parallelism tolerance      |
| t <sub>8</sub> | μm | Perpendicularity tolerance |

#### 19 Geometrical and positional accuracy for housings for YRTS

| Designation               | t <sub>2</sub> | t <sub>8</sub> |
|---------------------------|----------------|----------------|
|                           | μm             | μm             |
| YRTS200 ... YRTS460       | 6              | 8              |
| YRTS580-XL ... YRTS650-XL | 10             | 12             |

|                |    |                            |
|----------------|----|----------------------------|
| t <sub>2</sub> | μm | Roundness tolerance        |
| t <sub>8</sub> | μm | Perpendicularity tolerance |

### ZKLDF

#### 20 Diameter tolerances and geometric tolerances for shafts for ZKLDF, tolerance class h5 <sup>Ⓔ</sup>

| d    |       |    |     | t <sub>2</sub> | t <sub>6</sub> | t <sub>8</sub> |
|------|-------|----|-----|----------------|----------------|----------------|
| over | up to | U  | L   |                |                |                |
| mm   | mm    | μm | μm  | μm             | μm             | μm             |
| 50   | 80    | 0  | -13 | 3              | 1,5            | 3              |
| 80   | 120   | 0  | -15 | 4              | 2              | 4              |
| 120  | 180   | 0  | -18 | 5              | 2,5            | 5              |
| 180  | 250   | 0  | -20 | 7              | 3,5            | 7              |
| 250  | 315   | 0  | -23 | 8              | 4              | 8              |
| 315  | 400   | 0  | -25 | 9              | 4,5            | 9              |

| d    |       |    |     | t <sub>2</sub> | t <sub>6</sub> | t <sub>8</sub> |
|------|-------|----|-----|----------------|----------------|----------------|
| over | up to | U  | L   |                |                |                |
| mm   | mm    | µm | µm  | µm             | µm             | µm             |
| 400  | 500   | 0  | -27 | 10             | 5              | 10             |
| 500  | 630   | 0  | -32 | 11             | 5,5            | 11             |
| 630  | 800   | 0  | -36 | 13             | 6,5            | 13             |
| 800  | 1000  | 0  | -40 | 15             | 7,5            | 15             |
| 1000 | 1250  | 0  | -47 | 18             | 9              | 18             |

d                    mm                    Bore diameter  
 U                    mm                    Upper limit deviation  
 L                    mm                    Lower limit deviation  
 t<sub>2</sub>                  µm                    Roundness tolerance  
 t<sub>6</sub>                  µm                    Parallelism tolerance  
 t<sub>8</sub>                  µm                    Perpendicularity tolerance

☒21 Diameter tolerances and geometric tolerances for housings for ZKLDF, tolerance class J6 ©

| D    |       |     |     | t <sub>2</sub> | t <sub>8</sub> |
|------|-------|-----|-----|----------------|----------------|
| over | up to | U   | L   |                |                |
| mm   | mm    | µm  | µm  | µm             | µm             |
| 120  | 180   | +18 | -7  | 5              | 5              |
| 180  | 250   | +22 | -7  | 7              | 7              |
| 250  | 315   | +25 | -7  | 8              | 8              |
| 315  | 400   | +29 | -7  | 9              | 9              |
| 400  | 500   | +33 | -7  | 10             | 10             |
| 500  | 630   | +34 | -10 | 11             | 11             |
| 630  | 800   | +38 | -12 | 13             | 13             |
| 800  | 1000  | +44 | -12 | 15             | 15             |
| 1000 | 1250  | +52 | -14 | 18             | 18             |

D                    mm                    Outside diameter  
 U                    mm                    Upper limit deviation  
 L                    mm                    Lower limit deviation  
 t<sub>2</sub>                  µm                    Roundness tolerance  
 t<sub>8</sub>                  µm                    Perpendicularity tolerance

1.12.7 Mounting dimensions H<sub>1</sub>, H<sub>2</sub>

⚠ If minimal variation in height is required, the H<sub>1</sub> dimensional tolerance must be observed. The mounting dimension H<sub>2</sub> defines the position of any worm wheel used.

☒31 Mounting dimension H<sub>1</sub>, H<sub>2</sub>

00006FDD

|                |    |                                    |
|----------------|----|------------------------------------|
| H <sub>1</sub> | mm | Contact surface height, outer ring |
| H <sub>2</sub> | mm | Contact surface height, outer ring |

### 1.12.8 Unsupported or supported L-section ring

The outward-facing axial surfaces of the shaft-mounted bearing rings can be mounted with full-surface support on one or both sides. The support ring must be ordered separately.

For bearing series fitted with an L-section ring supported axially over its whole surface, there is an increase in axial rigidity in the direction of the support ring as a function of the support ring rigidity and in the tilting rigidity of the bearing position.

The shaft locating washer must be supported axially over its whole surface by the adjacent construction.

32 Mounting variants

|                |                                 |   |                                     |
|----------------|---------------------------------|---|-------------------------------------|
| 1              | Unsupported L-section ring YRTC | 2 | Supported L-section ring YRTC..-VSP |
| H <sub>1</sub> | mm                              |   | Contact surface height, outer ring  |
| H <sub>2</sub> | mm                              |   | Contact surface height, outer ring  |

00006FD1

Any mounting variants that deviate from those suggested may impair the function and performance characteristics of the bearings. In case of deviating designs, please contact Schaeffler.

#### YRTA

Only one preload match exists for the series.

If the standard version of the series is fitted with a supported L-section ring, the frictional torque of the bearing will increase.

#### YRT, YRTC

A factory-defined preload match is required when fitting bearings with a supported L-section ring. In such cases, the suffix VSP must be specified.

If the standard version of the series is fitted with a supported L-section ring, the frictional torque of the bearing will increase.

The supported L-section ring must also be axially supported over its full surface in order to achieve the stated rigidity values.



In the case of series YRTC, the height of the support ring should be at least equal to dimension H<sub>2</sub> of the bearing.

**YRTS**

Only one preload match exists for the series.

When fitting bearings with supported L-section rings, the increase in rigidity and frictional torque is minor and can generally be disregarded.


**ZKLDF**

Only one preload match exists for the series.

When fitting bearings with supported L-section rings, the increase in rigidity and frictional torque is minor and can generally be disregarded.

**1.12.9 Design of fixing threads in the adjacent construction**

The threads in the adjacent construction must be designed with a cylindrical countersink to ensure the running accuracy of the bearings. If the cylindrical countersink is not applied, the surface may become deformed when the fixing screws are tightened.

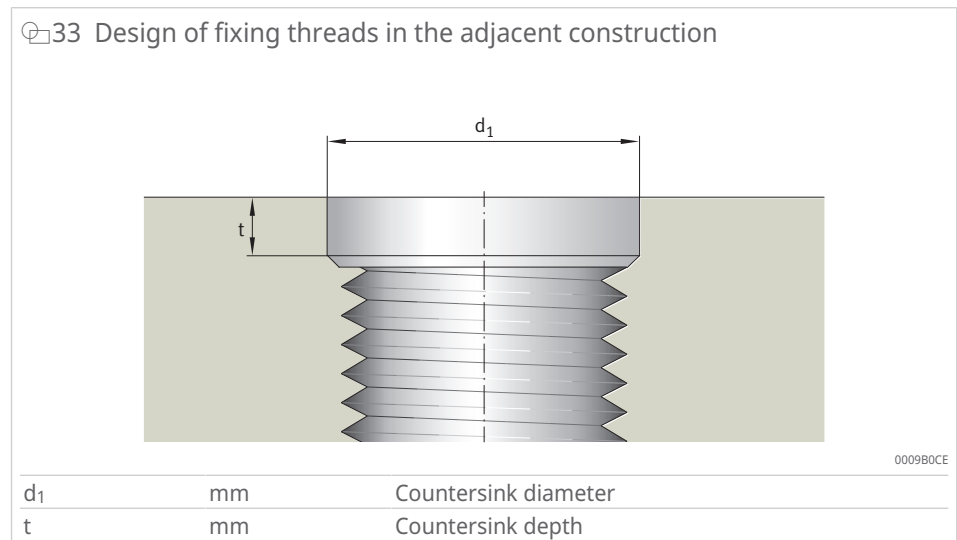

22 Design of countersink

| G   | $d_1$ | $t$ |
|-----|-------|-----|
|     | mm    | mm  |
| M4  | 4,4   | 1   |
| M5  | 5,5   | 1   |
| M6  | 6,6   | 1   |
| M8  | 8,8   | 1   |
| M10 | 11    | 1   |
| M12 | 13,2  | 1   |
| M16 | 17,6  | 1   |

|       |    |                      |
|-------|----|----------------------|
| G     | -  | Thread               |
| $d_1$ | mm | Countersink diameter |
| $t$   | mm | Countersink depth    |

**1.13 Mounting and dismounting**


Fixing holes in the bearing rings make these units very easy to fit.

### 1.13.1 Improved ease of mounting

To ensure easy and error-free positioning of the lubrication hole in the bearing relative to the lubrication hole in the machine housing, the following bearing series are equipped with a pilot pin hole:

- YRTC580-XL to YRTC1030-XL
- YRTS
- ZKLDF

34 Improved ease of mounting with axial lubrication hole

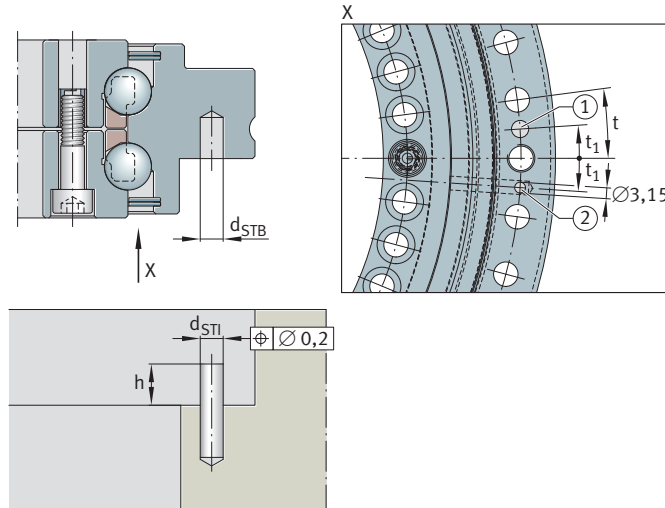

000187A2

- |   |                                                    |   |                                      |
|---|----------------------------------------------------|---|--------------------------------------|
| 1 | Pilot pin hole for positioning of lubrication hole | 2 | Lubrication hole $t_1 = 0,5 \cdot t$ |
|---|----------------------------------------------------|---|--------------------------------------|

23 Pilot pin hole


| d    |       | h    | d <sub>STI</sub> | d <sub>STB</sub> |
|------|-------|------|------------------|------------------|
| from | up to | max. |                  | min.             |
| mm   | mm    | mm   | mm               | mm               |
| -    | 460   | 4    | 4                | 5                |
| 460  | 580   | 6    | 6                | 8                |
| 580  | -     | 8    | 8                | 10               |

- |                  |    |               |
|------------------|----|---------------|
| d                | mm | Bore diameter |
| h                | mm | Pin height    |
| d <sub>STI</sub> | mm | Pin diameter  |
| d <sub>STB</sub> | mm | Pin hole      |

### 1.13.2 Mounting

Retaining screws secure the bearing parts for transport.

- ✓ Observe the strength class of the fixing screws.
1. Loosen the retaining screws before fitting in order to facilitate centring of the bearing.
  2. Tighten the fixing screws in a crosswise sequence using a torque wrench to 40 % of the specified tightening torque  $M_A$ . For ZKLDF, rotate the bearing ring during this step.
  3. Tighten the fixing screws in a crosswise sequence using a torque wrench to 70 % of the specified tightening torque  $M_A$ . For ZKLDF, rotate the bearing ring during this step.
  4. Tighten the fixing screws in a crosswise sequence using a torque wrench to 100 % of the specified tightening torque  $M_A$ . For ZKLDF, rotate the bearing ring during this step.
  5. After fitting, either secure or remove the retaining screws.

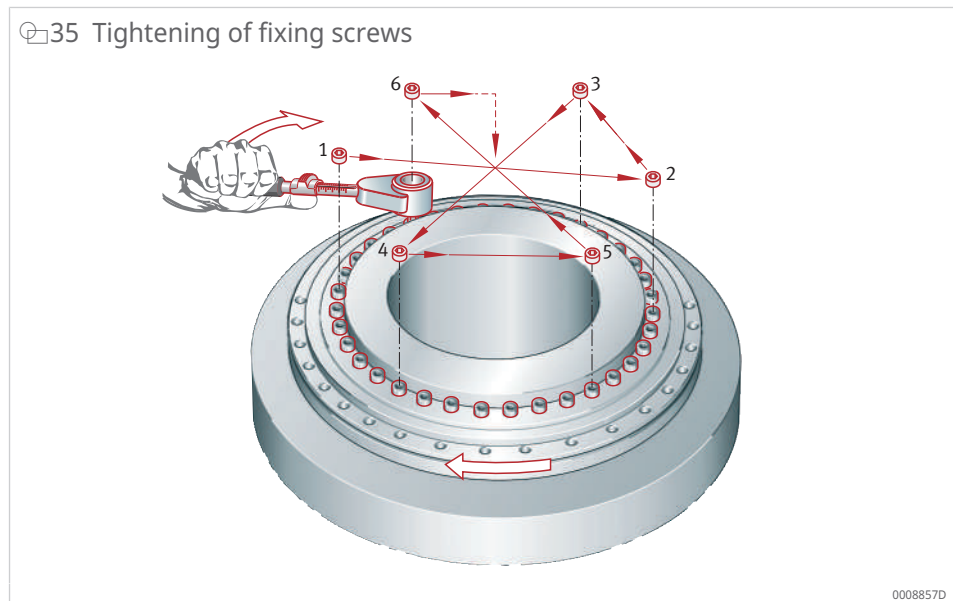

- ! Mounting forces must only be applied to the bearing ring to be fitted, never through the rolling elements.
- ! If the bearing is unusually difficult to move, loosen the fixing screws and re-tighten them in steps in a crosswise sequence to eliminate any stresses.
- ! Bearing components must not be separated or interchanged during fitting and dismantling.

### Further information

MON 100 | High-precision bearings for combined loads | <https://www.schaeffler.de/std/2013>

## 1.14 Further information

Further information can be found in the following publications:

HR 1 | Rolling Bearings | <https://www.schaeffler.de/std/1D3D>

MON 100 | High-precision bearings for combined loads | <https://www.schaeffler.de/std/2013>


## 1.15 Product tables

### 1.15.1 Explanations of the product tables

|                 |                   |                                                                                           |
|-----------------|-------------------|-------------------------------------------------------------------------------------------|
| 1               | -                 | Two retaining screws                                                                      |
| 2               | -                 | Screw counterbores in the L-section ring open to the bearing bore                         |
| 3               | -                 | Support surface, centring diameter                                                        |
| a               | mm                | Countersink depth                                                                         |
| C               | mm                | Outer ring width                                                                          |
| C <sub>0a</sub> | N                 | Basic static load rating, axial                                                           |
| C <sub>0r</sub> | N                 | Basic static load rating, radial                                                          |
| C <sub>a</sub>  | N                 | Basic dynamic load rating, axial                                                          |
| C <sub>aL</sub> | N/μm              | Axial rigidity of bearing position                                                        |
| C <sub>aW</sub> | N/μm              | Axial rigidity of rolling element set                                                     |
| C <sub>kL</sub> | Nm/mrad           | Tilting rigidity of bearing position                                                      |
| C <sub>kW</sub> | Nm/mrad           | Tilting rigidity of rolling element set                                                   |
| C <sub>r</sub>  | N                 | Basic dynamic load rating, radial                                                         |
| C <sub>rL</sub> | N/μm              | Radial rigidity of bearing position                                                       |
| C <sub>rW</sub> | N/μm              | Radial rigidity of rolling element set                                                    |
| d               | mm                | Bore diameter                                                                             |
| D               | mm                | Outside diameter                                                                          |
| d <sub>1</sub>  | mm                | Diameter of fastening hole, inner ring                                                    |
| D <sub>1</sub>  | mm                | Inner ring diameter                                                                       |
| d <sub>2</sub>  | mm                | Countersink diameter, fixing hole                                                         |
| D <sub>2</sub>  | mm                | Diameter of undercut                                                                      |
| d <sub>3</sub>  | mm                | Diameter of fixing holes, outer ring                                                      |
| D <sub>3</sub>  | mm                | Outside diameter                                                                          |
| G               | -                 | Extraction threads                                                                        |
| H               | mm                | Height                                                                                    |
| H <sub>1</sub>  | mm                | Contact surface height, outer ring                                                        |
| H <sub>2</sub>  | mm                | Contact surface height, outer ring                                                        |
| J               | mm                | Pitch circle diameter of fixing holes, inner ring                                         |
| J <sub>1</sub>  | mm                | Pitch circle diameter of fixing holes, outer ring                                         |
| m               | kg                | Mass                                                                                      |
| M <sub>A</sub>  | Nm                | Tightening torque for fixing screws according to DIN EN ISO 4762, strength class 10.9     |
| M <sub>I</sub>  | Nm                | Tightening torque for inner ring screws according to DIN EN ISO 4762, strength class 10.9 |
| M <sub>R</sub>  | Nm                | Frictional torque                                                                         |
| n               | -                 | Number of screw mounting holes                                                            |
| n <sub>A</sub>  | -                 | Number of fixing screws, outer ring                                                       |
| n <sub>G</sub>  | min <sup>-1</sup> | Limiting speed                                                                            |
| n <sub>GA</sub> | -                 | Number of extraction threads                                                              |
| n <sub>I</sub>  | -                 | Number of fixing screws, inner ring                                                       |
| t               | °                 | Pitch angle of fixing holes                                                               |


1.15.2 YRTA, main dimensions, performance data

Double direction  
For automation

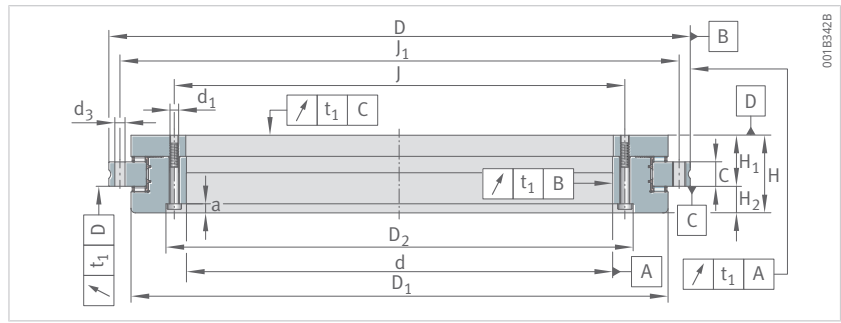

YRTA

| Designation | d   | D   | H   | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J   | J <sub>1</sub> |
|-------------|-----|-----|-----|----------------|----------------|----|------------------------|-----|----------------|
| -           | mm  | mm  | mm  | mm             | mm             | mm | mm                     | mm  | mm             |
| YRTA50      | 50  | 126 | 30  | 20             | 10             | 10 | 105                    | 63  | 116            |
| YRTA80      | 80  | 146 | 35  | 23,35          | 11,7           | 12 | 130                    | 92  | 138            |
| YRTA100     | 100 | 185 | 38  | 25             | 13             | 12 | 161                    | 112 | 170            |
| YRTA120     | 120 | 210 | 40  | 26             | 14             | 12 | 185                    | 135 | 195            |
| YRTA150     | 150 | 240 | 40  | 26             | 14             | 12 | 214                    | 165 | 225            |
| YRTA180     | 180 | 280 | 43  | 29             | 14             | 15 | 244                    | 194 | 260            |
| YRTA200     | 200 | 300 | 45  | 30             | 15             | 15 | 274                    | 215 | 285            |
| YRTA260     | 260 | 385 | 55  | 36,5           | 18,5           | 18 | 345                    | 280 | 365            |
| YRTA325     | 325 | 450 | 60  | 40             | 20             | 20 | 415                    | 342 | 430            |
| YRTA395     | 395 | 525 | 65  | 42,5           | 22,5           | 20 | 486                    | 415 | 505            |
| YRTA460     | 460 | 600 | 70  | 46             | 24             | 22 | 560                    | 482 | 580            |
| YRTA580     | 580 | 750 | 90  | 60             | 30             | 30 | 700                    | 610 | 720            |
| YRTA650     | 650 | 870 | 122 | 76             | 44             | 34 | 800                    | 680 | 830            |

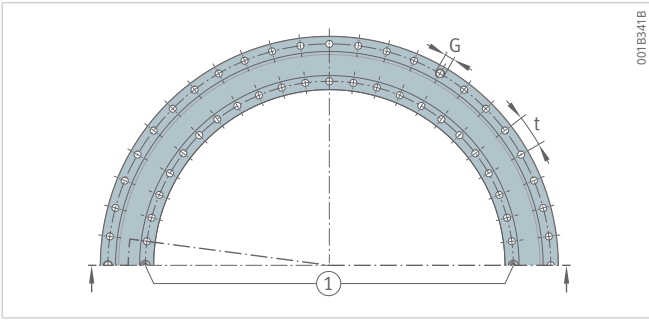


Hole pattern

| $C_a$  | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$             | $M_R$ |
|--------|----------|--------|----------|-------------------|-------|
| N      | N        | N      | N        | $\text{min}^{-1}$ | Nm    |
| 56000  | 280000   | 9500   | 24300    | 440               | 3,5   |
| 38000  | 158000   | 11400  | 34000    | 350               | 4,5   |
| 93000  | 455000   | 21500  | 68000    | 280               | 4,5   |
| 99000  | 520000   | 21700  | 73000    | 230               | 6     |
| 113000 | 650000   | 23300  | 83000    | 210               | 8     |
| 119000 | 730000   | 24500  | 94000    | 190               | 9     |
| 130000 | 850000   | 28000  | 115000   | 170               | 11    |
| 149000 | 1090000  | 31500  | 147000   | 130               | 17    |
| 219000 | 1900000  | 46000  | 255000   | 110               | 24    |
| 234000 | 2190000  | 51000  | 305000   | 90                | 35    |
| 255000 | 2550000  | 55000  | 355000   | 80                | 45    |
| 510000 | 4450000  | 116000 | 720000   | 60                | 90    |
| 810000 | 6800000  | 119000 | 780000   | 55                | 105   |


1.15.3 YRTA, mounting dimensions, rigidity values

Double direction  
For automation

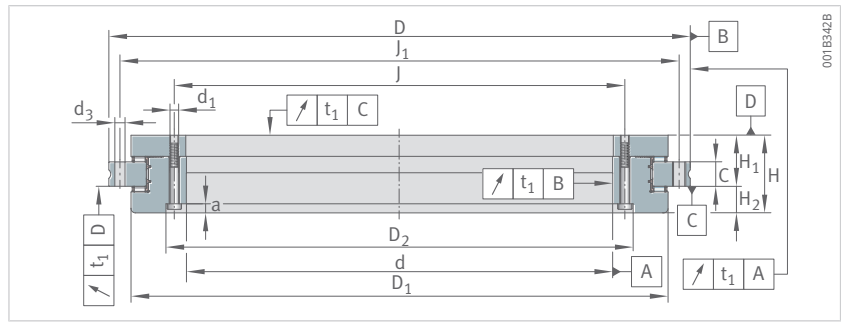

YRTA

| Designation | d <sub>1</sub> | D <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTA50      | 5,6            | -              | -   | 10             | 5,6            | 12             | 8,5            |
| YRTA80      | 5,6            | 102            | 4   | 10             | 4,6            | 12             | 8,5            |
| YRTA100     | 5,6            | 122            | 5,4 | 16             | 5,6            | 15             | 8,5            |
| YRTA120     | 7              | 146            | 6,2 | 22             | 7              | 21             | 14             |
| YRTA150     | 7              | 176,6          | 6,2 | 34             | 7              | 33             | 14             |
| YRTA180     | 7              | 205,6          | 6,2 | 46             | 7              | 45             | 14             |
| YRTA200     | 7              | 226,6          | 6,2 | 46             | 7              | 45             | 14             |
| YRTA260     | 9,3            | 295,8          | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTA325     | 9,3            | 357,8          | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTA395     | 9,3            | 430,8          | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTA460     | 9,3            | 497,8          | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTA580     | 11,4           | 628            | 11  | 46             | 11,4           | 42             | 68             |
| YRTA650     | 14             | 700            | 13  | 46             | 14             | 42             | 116            |

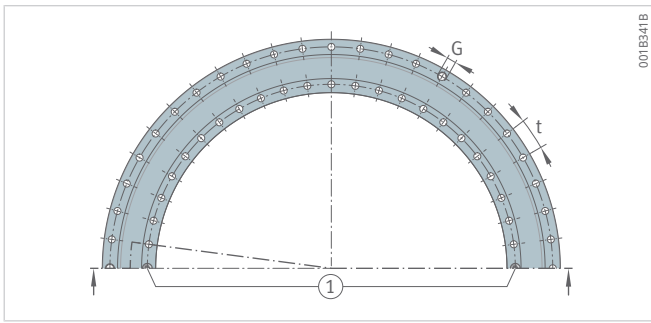


Hole pattern

| n  | t   | G   | n <sub>GA</sub> | C <sub>aL</sub> | C <sub>rL</sub> | C <sub>kL</sub> | C <sub>aW</sub> | C <sub>rW</sub> | C <sub>kW</sub> |
|----|-----|-----|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| -  | °   | -   | -               | N/μm            | N/μm            | Nm/mrad         | N/μm            | N/μm            | Nm/mrad         |
| 12 | 30  | -   | -               | 2600            | 1540            | 2037,5          | 6200            | 2100            | 5400            |
| 12 | 30  | -   | -               | 3200            | 2520            | 4075            | 4000            | 3600            | 5800            |
| 18 | 20  | M5  | 3               | 5300            | 3150            | 12200           | 8700            | 5200            | 23500           |
| 24 | 15  | M8  | 3               | 5800            | 3640            | 18200           | 9800            | 5600            | 35500           |
| 36 | 10  | M8  | 3               | 7600            | 4480            | 30300           | 12000           | 6500            | 61000           |
| 48 | 7,5 | M8  | 3               | 9400            | 5000            | 46000           | 13500           | 7700            | 88500           |
| 48 | 7,5 | M8  | 3               | 9800            | 5700            | 64000           | 15500           | 10000           | 128000          |
| 36 | 10  | M12 | 3               | 13800           | 7400            | 166000          | 19000           | 12000           | 265000          |
| 36 | 10  | M12 | 3               | 14200           | 8800            | 254000          | 33000           | 20000           | 633000          |
| 48 | 7,5 | M12 | 3               | 19800           | 8100            | 448000          | 37000           | 25000           | 1002000         |
| 48 | 7,5 | M12 | 3               | 24000           | 9100            | 686000          | 43000           | 30000           | 1543000         |
| 48 | 7,5 | M12 | 6               | 23800           | 4100            | 1176000         | 41800           | 37500           | 2570000         |
| 48 | 7,5 | M12 | 6               | 41200           | 10200           | 1909000         | 52000           | 38500           | 3879000         |


1.15.4 YRT, main dimensions, performance data

Double direction

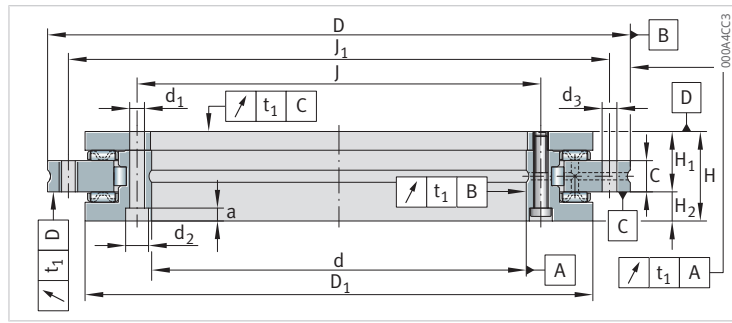


YRT

| Designation | d  | D   | H  | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J  | J <sub>1</sub> |
|-------------|----|-----|----|----------------|----------------|----|------------------------|----|----------------|
| -           | mm | mm  | mm | mm             | mm             | mm | mm                     | mm | mm             |
| YRT50       | 50 | 126 | 30 | 20             | 10             | 10 | 105                    | 63 | 116            |
| YRT80-TV    | 80 | 146 | 35 | 23,35          | 11,65          | 12 | 130                    | 92 | 138            |

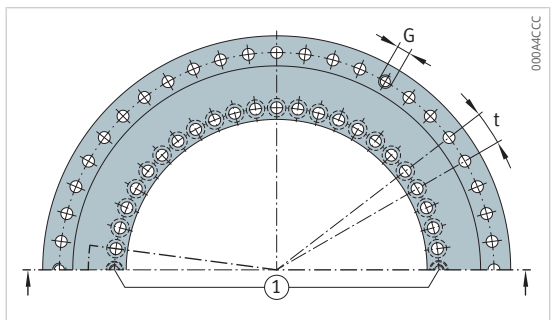

Hole pattern

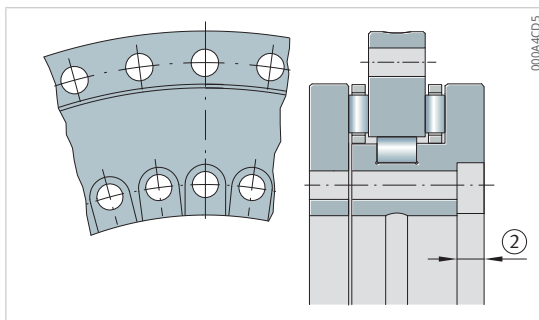


YRT80-TV

| $C_a$ | $C_{0a}$ | $C_r$ | $C_{0r}$ | $n_G$             | $M_R$ | $m$ |
|-------|----------|-------|----------|-------------------|-------|-----|
| N     | N        | N     | N        | $\text{min}^{-1}$ | Nm    | kg  |
| 56000 | 280000   | 28500 | 49500    | 440               | 2,5   | 1,6 |
| 38000 | 158000   | 44000 | 98000    | 350               | 3     | 2,4 |


1.15.5 YRT, mounting dimensions, rigidity values

Double direction

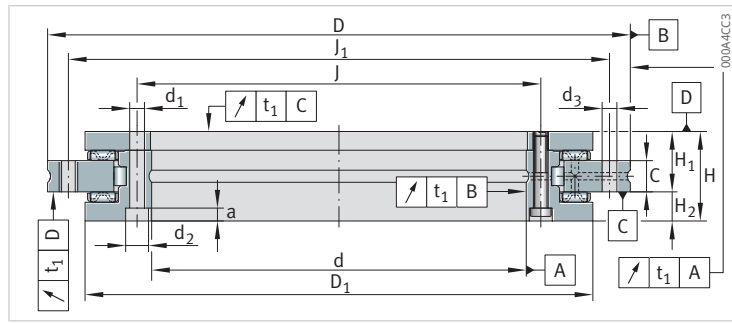


YRT

| Designation | d <sub>1</sub> | d <sub>2</sub> | a  | n <sub>I</sub> | M <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|----|----------------|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm | -              | Nm             | mm             | -              | Nm             |
| YRT50       | 5,6            | -              | -  | 10             | -              | 5,6            | 12             | 8,5            |
| YRT80-TV    | 5,6            | 10             | 4  | 10             | 4,5            | 4,6            | 12             | 8,5            |

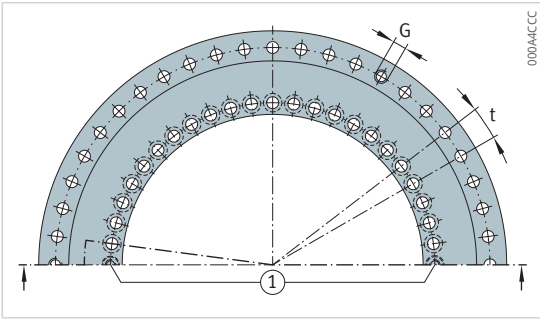

Hole pattern

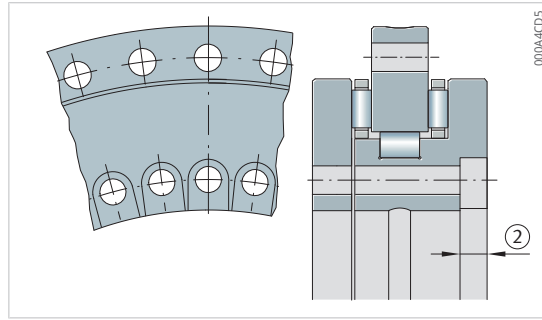


YRT80-TV

| n  | t  | G | n <sub>GA</sub> | CaL  | CrL  | CkL     | CaW  | CrW  | CkW     |
|----|----|---|-----------------|------|------|---------|------|------|---------|
| -  | °  | - | -               | N/μm | N/μm | Nm/mrad | N/μm | N/μm | Nm/mrad |
| 12 | 30 | - | -               | 1300 | 1100 | 1250    | 6200 | 1500 | 5900    |
| 12 | 30 | - | -               | 1600 | 1800 | 2500    | 4000 | 2600 | 6300    |


1.15.6 YRTC, main dimensions, performance data

Double direction

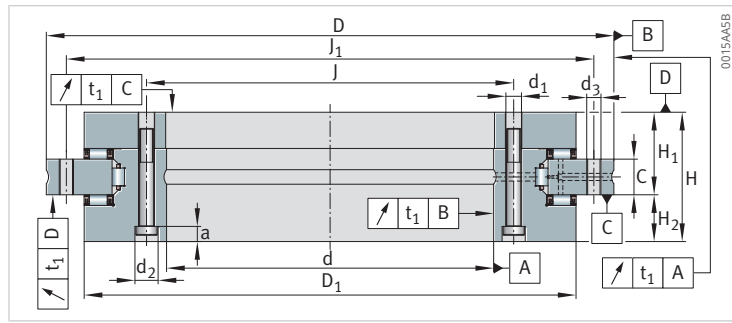

YRTC

| Designation | d    | D    | H   | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J    | J <sub>1</sub> |
|-------------|------|------|-----|----------------|----------------|----|------------------------|------|----------------|
| -           | mm   | mm   | mm  | mm             | mm             | mm | mm                     | mm   | mm             |
| YRTC100-XL  | 100  | 185  | 38  | 25             | 13             | 12 | 161                    | 112  | 170            |
| YRTC120-XL  | 120  | 210  | 40  | 26             | 14             | 12 | 185                    | 135  | 195            |
| YRTC150-XL  | 150  | 240  | 40  | 26             | 14             | 12 | 214,5                  | 165  | 225            |
| YRTC180-XL  | 180  | 280  | 43  | 29             | 14             | 15 | 245,1                  | 194  | 260            |
| YRTC200-XL  | 200  | 300  | 45  | 30             | 15             | 15 | 274,4                  | 215  | 285            |
| YRTC260-XL  | 260  | 385  | 55  | 36,5           | 18,5           | 18 | 347                    | 280  | 365            |
| YRTC325-XL  | 325  | 450  | 60  | 40             | 20             | 20 | 415,1                  | 342  | 430            |
| YRTC395-XL  | 395  | 525  | 65  | 42,5           | 22,5           | 20 | 487,7                  | 415  | 505            |
| YRTC460-XL  | 460  | 600  | 70  | 46             | 24             | 22 | 560,9                  | 482  | 580            |
| YRTC580-XL  | 580  | 750  | 90  | 60             | 30             | 30 | 700                    | 610  | 720            |
| YRTC650-XL  | 650  | 870  | 122 | 78             | 44             | 34 | 800                    | 680  | 830            |
| YRTC850-XL  | 850  | 1095 | 124 | 80,5           | 43,5           | 37 | 1018                   | 890  | 1055           |
| YRTC950-XL  | 950  | 1200 | 132 | 86             | 46             | 40 | 1130                   | 990  | 1160           |
| YRTC1030-XL | 1030 | 1300 | 145 | 92,5           | 52,5           | 40 | 1215                   | 1075 | 1255           |

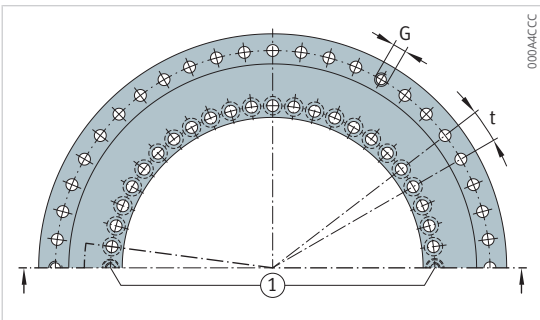


Hole pattern

1

| $C_a$   | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$<br>Continuous operation | $n_G$<br>Swivel operation | $M_R$ | $m$  |
|---------|----------|--------|----------|-------------------------------|---------------------------|-------|------|
| N       | N        | N      | N        | $\text{min}^{-1}$             | $\text{min}^{-1}$         | Nm    | kg   |
| 105000  | 455000   | 49500  | 88000    | 1200                          | –                         | 2,5   | 3,65 |
| 112000  | 520000   | 69000  | 124000   | 900                           | –                         | 4     | 4,61 |
| 128000  | 650000   | 74000  | 146000   | 800                           | –                         | 4     | 5,4  |
| 134000  | 730000   | 100000 | 200000   | 600                           | –                         | 5     | 7,2  |
| 147000  | 850000   | 123000 | 275000   | 450                           | –                         | 6     | 9,2  |
| 168000  | 1090000  | 140000 | 355000   | 300                           | –                         | 9     | 17,8 |
| 247000  | 1900000  | 183000 | 530000   | 200                           | –                         | 13    | 24,7 |
| 265000  | 2190000  | 200000 | 640000   | 200                           | –                         | 19    | 32,5 |
| 290000  | 2550000  | 265000 | 880000   | 150                           | –                         | 25    | 45,2 |
| 580000  | 4450000  | 235000 | 730000   | 80                            | 200                       | 60    | 89   |
| 910000  | 6800000  | 455000 | 1300000  | 70                            | 170                       | 70    | 170  |
| 1020000 | 8500000  | 520000 | 1690000  | 50                            | 125                       | 130   | 253  |
| 1080000 | 9500000  | 550000 | 1890000  | 45                            | 110                       | 170   | 312  |
| 1140000 | 10300000 | 580000 | 2050000  | 40                            | 100                       | 250   | 375  |


1.15.7 YRTC, mounting dimensions, rigidity values

Double direction

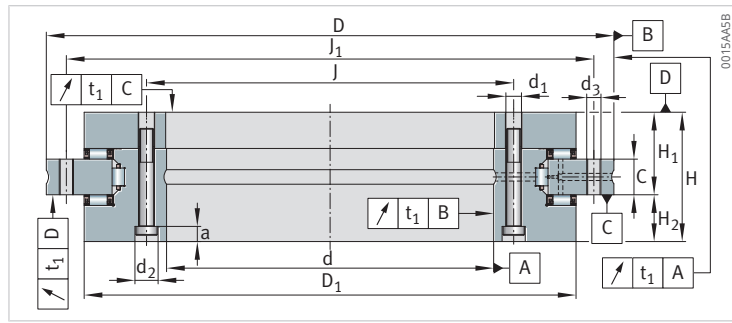

YRTC

| Designation | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTC100-XL  | 5,6            | 10             | 5,4 | 16             | 5,6            | 15             | 8,5            |
| YRTC120-XL  | 7              | 11             | 6,2 | 22             | 7              | 21             | 14             |
| YRTC150-XL  | 7              | 11             | 6,2 | 34             | 7              | 33             | 14             |
| YRTC180-XL  | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTC200-XL  | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTC260-XL  | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTC325-XL  | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTC395-XL  | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTC460-XL  | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTC580-XL  | 11,4           | 18             | 11  | 46             | 11,4           | 42             | 68             |
| YRTC650-XL  | 14             | 20             | 13  | 46             | 14             | 42             | 116            |
| YRTC850-XL  | 18             | 26             | 17  | 58             | 18             | 54             | 284            |
| YRTC950-XL  | 18             | 26             | 17  | 58             | 18             | 54             | 284            |
| YRTC1030-XL | 18             | 26             | 17  | 70             | 18             | 66             | 284            |

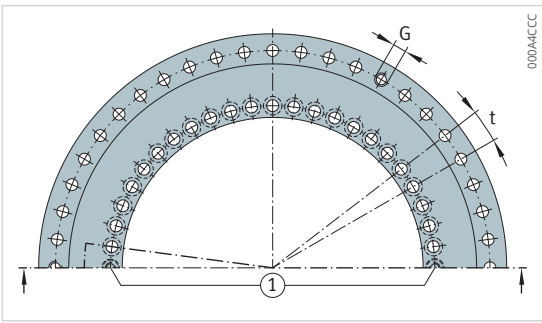


Hole pattern

| n  | t   | G   | n <sub>GA</sub> | C <sub>aL</sub> | C <sub>rL</sub> | C <sub>kL</sub> | C <sub>aW</sub> | C <sub>rW</sub> | C <sub>kW</sub> |
|----|-----|-----|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| -  | °   | -   | -               | N/μm            | N/μm            | Nm/mrad         | N/μm            | N/μm            | Nm/mrad         |
| 18 | 20  | M5  | 3               | 5300            | 3150            | 12200           | 8700            | 5200            | 23500           |
| 24 | 15  | M8  | 3               | 5800            | 3640            | 18200           | 9800            | 5600            | 35500           |
| 36 | 10  | M8  | 3               | 7600            | 4480            | 30300           | 12000           | 6500            | 61000           |
| 48 | 7,5 | M8  | 3               | 9400            | 5000            | 46000           | 13500           | 5300            | 88500           |
| 48 | 7,5 | M8  | 3               | 9800            | 5700            | 64000           | 15500           | 6200            | 128000          |
| 36 | 10  | M12 | 3               | 13800           | 7400            | 166000          | 19000           | 8100            | 265000          |
| 36 | 10  | M12 | 3               | 14200           | 8800            | 254000          | 33000           | 9900            | 633000          |
| 48 | 7,5 | M12 | 3               | 19800           | 8100            | 448000          | 37000           | 13000           | 1002000         |
| 48 | 7,5 | M12 | 3               | 24000           | 9100            | 686000          | 43000           | 17000           | 1543000         |
| 48 | 7,5 | M12 | 6               | 23800           | 4100            | 1176000         | 41800           | 11200           | 1960000         |
| 48 | 7,5 | M12 | 6               | 41200           | 10200           | 1909000         | 51400           | 8200            | 3554000         |
| 60 | 6   | M16 | 6               | 53000           | 16700           | 3762000         | 61900           | 12000           | 6772000         |
| 60 | 6   | M16 | 6               | 61400           | 19000           | 4893000         | 72700           | 17900           | 11494000        |
| 72 | 5   | M16 | 6               | 72800           | 21300           | 8640000         | 74900           | 14200           | 11165000        |


1.15.8 YRTS, main dimensions, performance data

Double direction  
For higher speeds

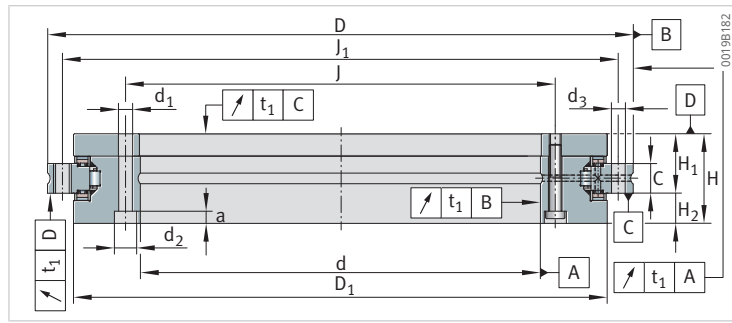


YRTS

| Designation | d   | D   | H   | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J   | J <sub>1</sub> |
|-------------|-----|-----|-----|----------------|----------------|----|------------------------|-----|----------------|
| -           | mm  | mm  | mm  | mm             | mm             | mm | mm                     | mm  | mm             |
| YRTS200     | 200 | 300 | 45  | 30             | 15             | 15 | 274,4                  | 215 | 285            |
| YRTS260     | 260 | 385 | 55  | 36,5           | 18,5           | 18 | 347                    | 280 | 365            |
| YRTS325     | 325 | 450 | 60  | 40             | 20             | 20 | 415,1                  | 342 | 430            |
| YRTS395     | 395 | 525 | 65  | 42,5           | 22,5           | 20 | 487,7                  | 415 | 505            |
| YRTS460     | 460 | 600 | 70  | 46             | 24             | 22 | 560,9                  | 482 | 580            |
| YRTS580-XL  | 580 | 750 | 90  | 60             | 30             | 30 | 700                    | 610 | 720            |
| YRTS650-XL  | 650 | 870 | 122 | 78             | 44             | 34 | 800                    | 680 | 830            |

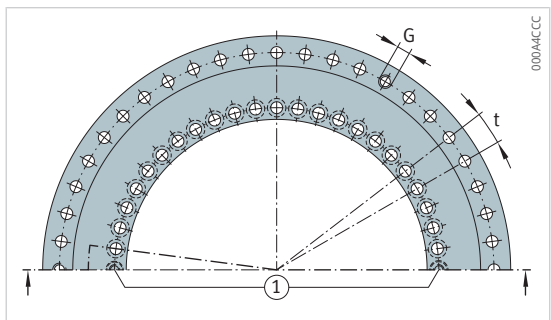

Hole pattern

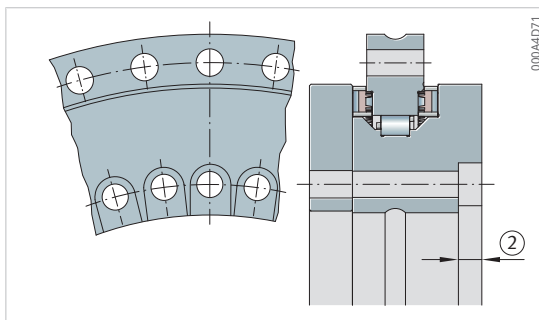


Countersunk screw holes for YRTS325

| $C_a$  | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$             | $m$  |
|--------|----------|--------|----------|-------------------|------|
| N      | N        | N      | N        | $\text{min}^{-1}$ | kg   |
| 155000 | 840000   | 94000  | 226000   | 1160              | 9,7  |
| 173000 | 1050000  | 110000 | 305000   | 910               | 18,3 |
| 191000 | 1260000  | 109000 | 320000   | 760               | 25   |
| 214000 | 1540000  | 121000 | 390000   | 650               | 33   |
| 221000 | 1690000  | 168000 | 570000   | 560               | 45   |
| 590000 | 4050000  | 255000 | 820000   | 350               | 84   |
| 980000 | 6500000  | 480000 | 1390000  | 300               | 161  |


1.15.9 YRTS, mounting dimensions, rigidity values

Double direction  
For higher speeds

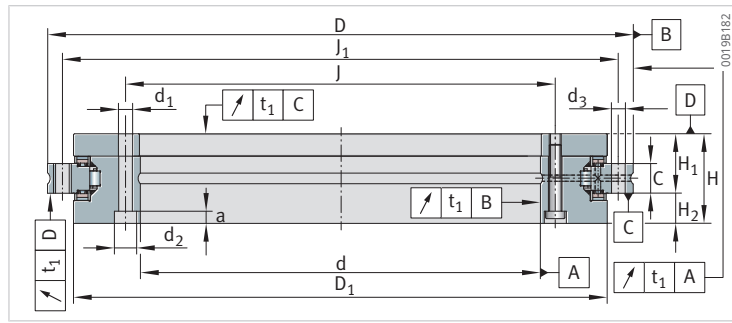


YRTS

| Designation | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTS200     | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTS260     | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTS325     | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTS395     | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTS460     | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTS580-XL  | 11,4           | 18             | 11  | 46             | 11,4           | 42             | 68             |
| YRTS650-XL  | 14             | 20             | 13  | 46             | 14             | 42             | 116            |

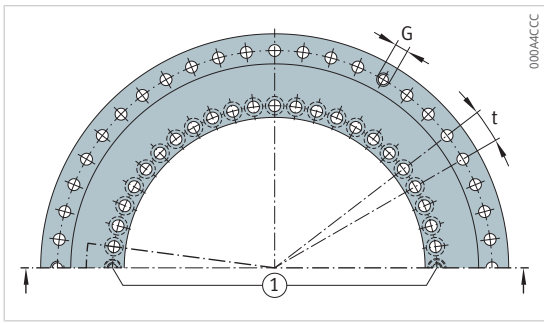


Hole pattern

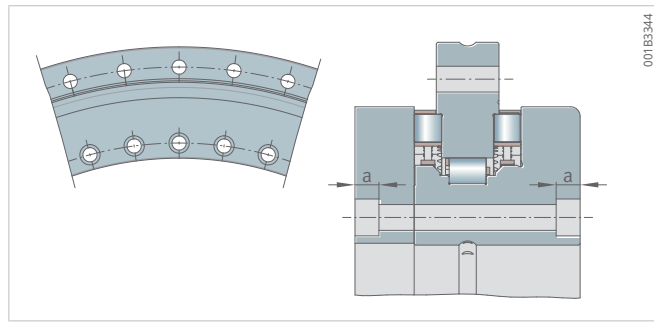

Countersunk screw holes for YRTS580-XL, YRTS650-XL


| n  | t   | G   | n <sub>GA</sub> | CaL   | CrL   | CkL     | CaW   | CrW   | CkW     |
|----|-----|-----|-----------------|-------|-------|---------|-------|-------|---------|
| -  | °   | -   | -               | N/μm  | N/μm  | Nm/mrad | N/μm  | N/μm  | Nm/mrad |
| 48 | 7,5 | M8  | 3               | 8800  | 6100  | 65600   | 13600 | 3900  | 101000  |
| 36 | 10  | M12 | 3               | 11800 | 8200  | 151500  | 16800 | 5800  | 201000  |
| 36 | 10  | M12 | 3               | 14480 | 9200  | 260000  | 19900 | 7100  | 350000  |
| 48 | 7,5 | M12 | 3               | 17100 | 10200 | 440900  | 23400 | 8700  | 582000  |
| 48 | 7,5 | M12 | 3               | 19500 | 9200  | 633000  | 25400 | 9500  | 843000  |
| 48 | 7,5 | M12 | 6               | 26100 | 14800 | 1661700 | 34300 | 12500 | 2000000 |
| 48 | 7,5 | M12 | 6               | 45200 | 37300 | 2697200 | 42850 | 12500 | 3333000 |

1.15.10 ZKLDF, main dimensions, performance data  
Double direction

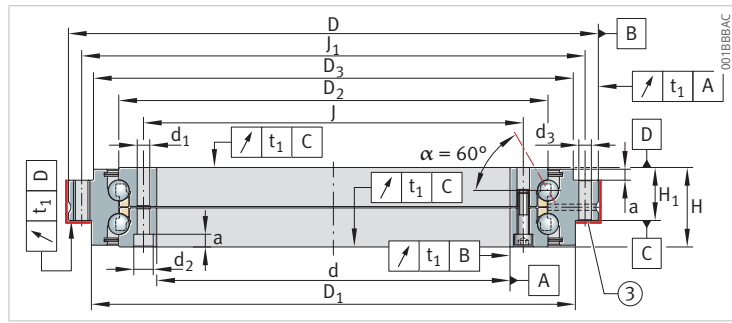


ZKLDF

| Designation | d   | D   | H  | H <sub>1</sub> | D <sub>1</sub> | D <sub>2</sub> | D <sub>3</sub> | J   | J <sub>1</sub> |
|-------------|-----|-----|----|----------------|----------------|----------------|----------------|-----|----------------|
| -           | mm  | mm  | mm | mm             | mm             | mm             | mm             | mm  | mm             |
| ZKLDF100    | 100 | 185 | 38 | 25             | 161            | 136            | 158            | 112 | 170            |
| ZKLDF120    | 120 | 210 | 40 | 26             | 185            | 159            | 181            | 135 | 195            |
| ZKLDF150    | 150 | 240 | 40 | 26             | 214            | 188            | 211            | 165 | 225            |
| ZKLDF180    | 180 | 280 | 43 | 29             | 244            | 219            | 246            | 194 | 260            |
| ZKLDF200    | 200 | 300 | 45 | 30             | 274            | 243            | 271            | 215 | 285            |
| ZKLDF260    | 260 | 385 | 55 | 36,5           | 345            | 313            | 348            | 280 | 365            |
| ZKLDF325    | 325 | 450 | 60 | 40             | 415            | 380            | 413            | 342 | 430            |
| ZKLDF395    | 395 | 525 | 65 | 42,5           | 486            | 450            | 488            | 415 | 505            |
| ZKLDF460    | 460 | 600 | 70 | 46             | 560            | 520            | 563            | 482 | 580            |

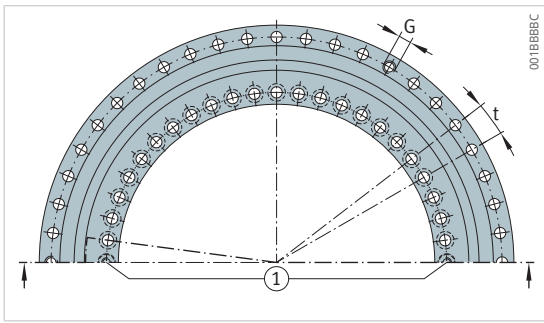

Hole pattern

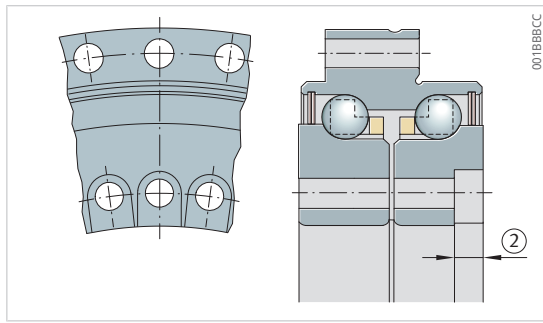


ZKLD100, ZKLD1325

| $C_a$  | $C_{0a}$ | $C_{ua}$ | $n_G$             | $M_R$ | $m$ |
|--------|----------|----------|-------------------|-------|-----|
| N      | N        | N        | $\text{min}^{-1}$ | Nm    | kg  |
| 71000  | 265000   | 10300    | 5000              | -     | 3,8 |
| 76000  | 315000   | 11500    | 4300              | -     | 4,8 |
| 81000  | 380000   | 12600    | 3600              | -     | 5,6 |
| 85000  | 440000   | 13500    | 3500              | -     | 7,7 |
| 121000 | 610000   | 17900    | 3200              | -     | 10  |
| 162000 | 920000   | 23800    | 2400              | -     | 19  |
| 172000 | 1110000  | 26000    | 2000              | -     | 25  |
| 241000 | 1580000  | 34000    | 1600              | -     | 33  |
| 255000 | 1860000  | 37000    | 1400              | -     | 47  |


1.15.11 ZKLDF, mounting dimensions, rigidity values

Double direction

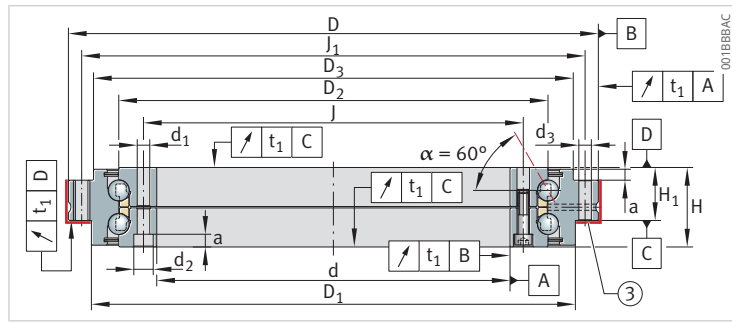


ZKLDF

| Designation | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| ZKLDF100    | 5,6            | 10             | 5,4 | 16             | 5,6            | 15             | 8,5            |
| ZKLDF120    | 7              | 11             | 6,2 | 22             | 7              | 21             | 14             |
| ZKLDF150    | 7              | 11             | 6,2 | 34             | 7              | 33             | 14             |
| ZKLDF180    | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| ZKLDF200    | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| ZKLDF260    | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| ZKLDF325    | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| ZKLDF395    | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| ZKLDF460    | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |

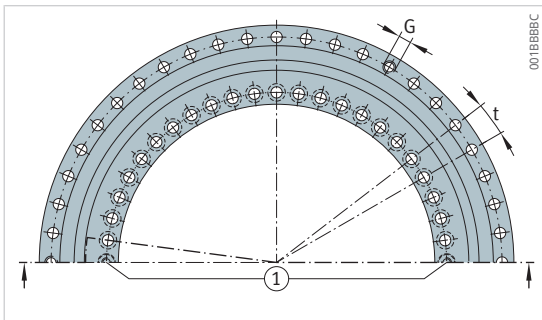

Hole pattern

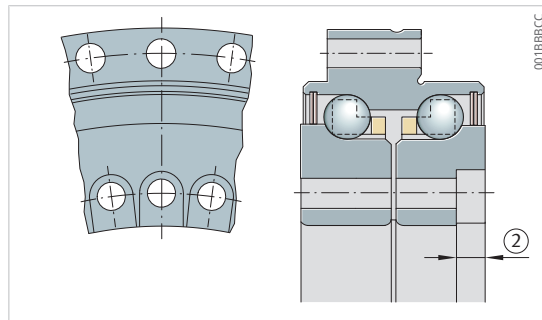

ZKLDF100, ZKLDF325

| n  | t   | G   | n <sub>GA</sub> | CaL  | CrL  | CkL     | CaW  | CrW  | CkW     |
|----|-----|-----|-----------------|------|------|---------|------|------|---------|
| -  | °   | -   | -               | N/μm | N/μm | Nm/mrad | N/μm | N/μm | Nm/mrad |
| 18 | 20  | M5  | 3               | 1200 | 350  | 3600    | 2200 | 350  | 5000    |
| 24 | 15  | M8  | 3               | 1500 | 400  | 5500    | 2500 | 400  | 8000    |
| 36 | 10  | M8  | 3               | 1700 | 400  | 7800    | 2900 | 400  | 12000   |
| 48 | 7,5 | M8  | 3               | 1900 | 500  | 10700   | 2800 | 500  | 16000   |
| 48 | 7,5 | M8  | 3               | 2500 | 600  | 17500   | 3700 | 600  | 26000   |
| 36 | 10  | M12 | 3               | 3200 | 700  | 40000   | 4700 | 700  | 54000   |
| 36 | 10  | M12 | 3               | 4000 | 800  | 60000   | 5400 | 800  | 90000   |
| 48 | 7,5 | M12 | 3               | 4500 | 900  | 100000  | 6300 | 900  | 148000  |
| 48 | 7,5 | M12 | 3               | 5300 | 1100 | 175000  | 7100 | 1100 | 223000  |

## 2 Axial/radial bearings with incremental angular measuring system

The bearing-integrated angular measuring system is intended for use in electrically driven, position-controlled machine tool axes for the purpose of recording actual angular values. It consists of the measuring system bearing and the measuring head.

### Advantages of the integrated angular measuring system

- very good control characteristics (high control stability and high dynamics) due to the rigid mechanical connection to the adjacent construction
- extremely high system accuracies achieved with a single measuring head due to the use of precision components
- hollow shaft design; the centre of the axis is freely available for additional components
- non-contact and wear-free
- measurement unaffected by tilting or position
- unaffected by oils, greases, cooling lubricants and magnets
- easy to mount as adjustment of the measurement gap is not required
- no need for alignment of the bearing and a separate measuring system
- no additional mounting parts required; the resulting space saved can be used for the machine working area
- saves on components, overall design envelope and costs due to the compact, integrated design requiring fewer components
- compatible with all standard measuring system interfaces
- reference search run is not required with absolute measuring systems
- incremental measuring systems are electronically compatible with all common machine tool controllers

### Advantages of the measuring system bearing

- very high tilting rigidity
- very low frictional torque
- high mechanical limiting speeds possible
- low heat generation in continuous operation
- maximum positioning accuracy achievable


## 2.1 Bearing design

### YRTCMA, YRTSMA

Axial/radial bearings YRTCMA and YRTSMA correspond in mechanical terms to series YRTC and YRTS, but are additionally equipped with an absolute angular measuring system.

The bearing-integrated angular measuring system consists of a measuring system bearing with a measurement ring mounted on the inner ring and the measuring head MHA, which is directly screw mounted onto the bearing outer ring of the respective measuring system bearing.

36 Bearing-integrated inductive measuring system, absolute

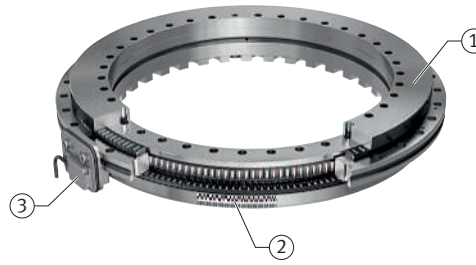

00192B61


|   |                      |   |                  |
|---|----------------------|---|------------------|
| 1 | YRTCMA               | 2 | Measurement ring |
| 3 | Measuring head MHA-0 |   |                  |

### YRTCMI

Axial/radial bearings YRTCMI correspond mechanically to series YRTC, but are additionally equipped with an incremental angular measuring system.

The bearing-integrated angular measuring system consists of a measuring system bearing with a measurement ring mounted on the inner ring and the measuring head MHI, which is directly screw mounted onto the bearing outer ring of the respective measuring system bearing.

37 Bearing-integrated inductive measuring system, incremental

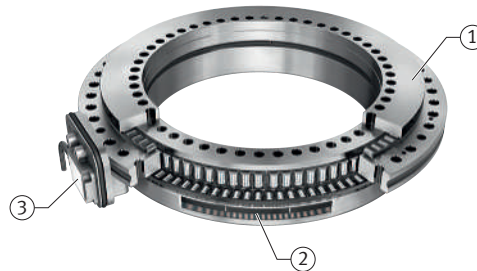

00192C71

|   |                      |   |                  |
|---|----------------------|---|------------------|
| 1 | YRTCMI               | 2 | Measurement ring |
| 3 | Measuring head MHI-0 |   |                  |

## 2.2 Integrated angular measuring system


The bearing-integrated angular measuring system is intended for use in electrically driven, position-controlled machine tool axes for the purpose of recording actual angular values. It consists of the measuring system bearing and the measuring head.

### 2.2.1 Measuring heads

The measuring head works according to the AMOSIN® measuring principle. The measuring head contains the primary and secondary coils for inductive scanning of the measurement ring, the electronic measuring head system, interfaces, line drivers and a cable with plug connector. AMOSIN® is a trademark of AMO GmbH.

The measuring heads can be screwed directly onto the respective outer ring of the measuring system bearing.

For YRTCMA, YRTSMA and YRTCMI, measuring heads are available in both radial screw mounting and axial screw mounting variants.

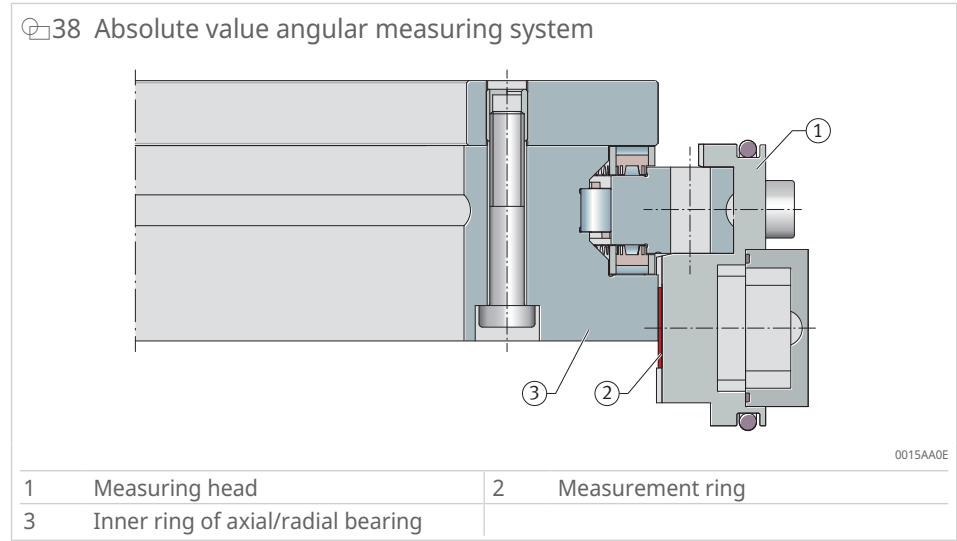

The electronic evaluation system is integrated into the measuring head, allowing the system to be connected directly to the controller. The measuring head is configured such that no adjustment of the measurement gap is required and the rolling bearing chamber is protected against the egress and ingress of lubricants and other media. Other measuring head designs are available by agreement.


### Radial measuring head MHA-0, MHI-0

In the variant suitable for radial screw mounting on the outer ring, no adjustment of the measurement gap is required and accessibility is very good. As a result, the time spent on mounting work is reduced.



### Axial measuring head MHA-2, MHI-2

In the variant suitable for axial screw mounting on the bearing outer ring, adjustment of the measurement gap is required. The axial measuring head is smaller than the radial measuring head.


 40 Axial measuring head MHA-2


00194991

2

### 2.2.2 Operating principle

The AMOSIN<sup>®</sup> operating principle for scanning the angular pitch works on an inductive and non-contact basis. The planar coil structure built into the measuring head is unique and consists of multiple coil units arranged in a line in the direction of measurement, which in turn are composed of primary and secondary coils arranged on top of each other.

As a result of manufacturing the sensor unit on a flexible substrate using multi-layer technology, the curvature of the coil structure is matched to the curvature of the measurement rings.

To perform inductive scanning of the measurement ring, the primary coils are excited with a high-frequency alternating voltage, generating alternating electromagnetic fields around the primary windings. These alternating electromagnetic fields are damped by the webs in the measurement ring and not damped by the gaps.

For the measurement ring attached to the inner ring with a rotation facility, the following applies: The inductive coupling factor between the primary and secondary coils is influenced and modulated with the movement of the measurement ring relative to the measuring head. A lower or higher alternating current is induced in the secondary windings depending on whether webs or gaps are facing the secondary coils. The positional value in the measuring head is determined from these differently modulated voltages.

### Determination of position with absolute angular measuring systems MHA

In absolute measuring systems, an angular pitch with absolute coding and an angular pitch with incremental coding are arranged on the measurement rings in a circumferential direction. Both angular pitches are scanned by dedicated primary and secondary coils.


Immediately after the operating voltage is switched on, all primary coils are excited by alternating voltage. This leads to the generation of a unique bit pattern in the absolute secondary coils, from which the absolute angular position is determined by the measuring head for each pitch period.

SIN-COS-modulated voltages are also generated in the incremental secondary coils, on the basis of which exact positions are determined and more finely resolved within a pitch period.

The absolute actual angular position is calculated from the angular position per absolute pitch period and the high-resolution angular position within the incremental pitch period.

This actual angular position is transmitted to the controller via the serial data interface.

41 Operating principle of inductive, absolute AMOSIN® angular measuring systems

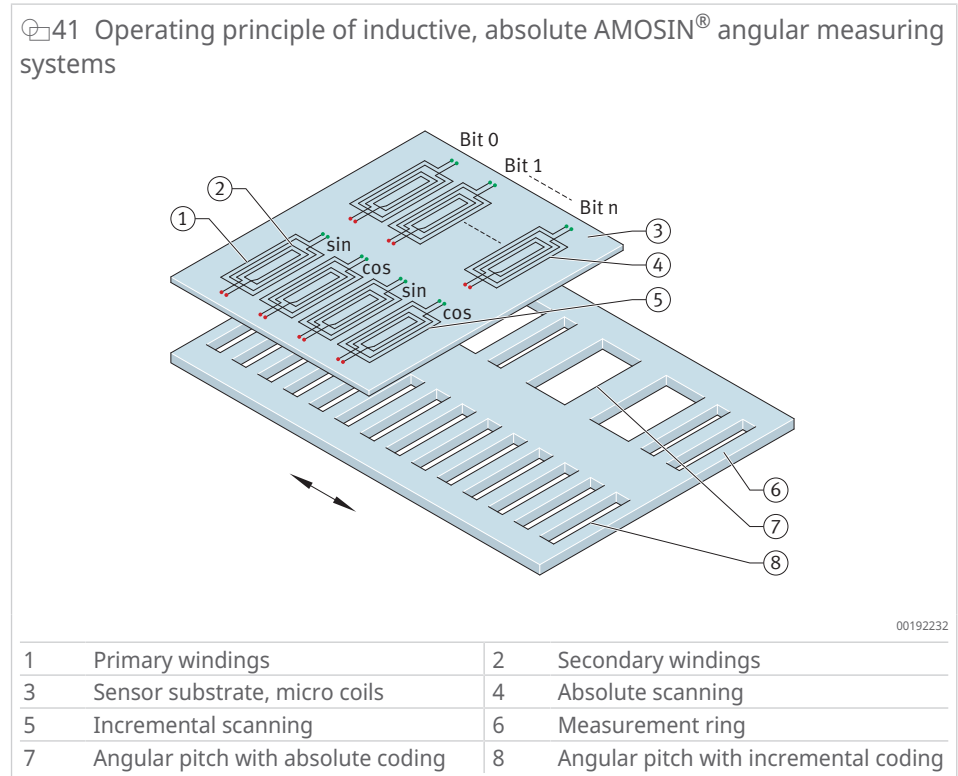


### Determination of position with incremental angular measuring systems MHI

In incremental measuring systems, an angular pitch with incremental coding and several pitch-coded reference marks are arranged on the measurement rings in a circumferential direction. These two structures are scanned using dedicated primary and secondary coils.

Immediately after the operating voltage is switched on, all primary coils are excited by alternating voltage. As a result, SIN-COS-modulated voltages are generated in the incremental secondary coils, which are transmitted to the controller as analogue SIN-COS voltage signals. In the controller, the analogue voltage signals undergo A/D conversion and higher interpolation to generate the current incremental actual angular position.

The pitch-coded reference marks are scanned using the reference mark scanning movement. This requires a search run, during which the controller passes over at least two reference marks in order to determine the absolute actual angular position.

42 Operating principle of inductive, incremental AMOSIN® angular measuring systems

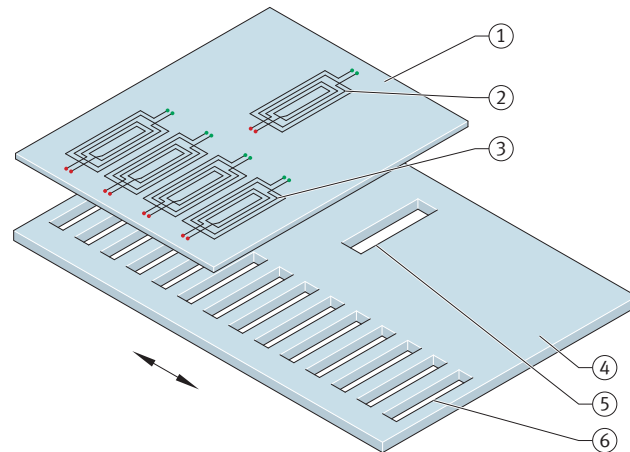

0019222E

|   |                               |   |                           |
|---|-------------------------------|---|---------------------------|
| 1 | Sensor substrate, micro coils | 2 | Reference mark scanning   |
| 3 | Incremental scanning          | 4 | Measurement ring          |
| 5 | Reference mark                | 6 | Incremental angular pitch |

### 2.2.3 Electronic interfaces



If you have any questions regarding the electronic interfaces, please contact Schaeffler.

#### Absolute interface EnDat 2.2

The EnDat 2.2 interface is a digital, bidirectional interface for measuring devices. It is able to output positional values as well as read out and update information stored in the measuring device, or store new information. Due to the serial transmission of data, four signal lines are sufficient.

The data DATA are transmitted synchronously with the CLOCK signal provided by the electronic post-processor.

No analogue 1 Vpp signals are output in addition to the EnDat 2.2 command set.

The achievable clock frequency is determined by the length of the cable. With running time compensation in the electronic post-processor, clock frequencies of up to 16 MHz and cable lengths up to a maximum of 100 m are possible.

However, transmission frequencies up to 16 MHz in combination with long cable lengths place high technical demands on the cable.

Longer cable lengths are achieved with the 1 m-long measuring head and an extension cable. As a general rule, the entire transmission path must be designed for the respective clock frequency. For this reason, the sole use of extension cables specified and approved for the measuring system is recommended. Any interruptions in the signal line, due to slip rings for example, should also be avoided.

The digital interface is compatible with the following controllers and their subsequent generations:

- Heidenhain from TNC 640
- Siemens Sinumerik from 840D sl via the Siemens sensor module SMC40 from firmware versions 4,5 and 4,6

The measuring systems are self-configuring. No parameters specific to the measuring system have to be entered into the controller.

### Absolute interface DRIVE-CLiQ®

The DRIVE-CLiQ® interface is a digital, bidirectional interface for measuring devices. It is able to output positional values as well as read out and update information stored in the measuring device, or store new information. Due to the serial transmission of data, four signal lines are sufficient.

The data DATA are transmitted synchronously with the CLOCK signal provided by the electronic post-processor.

Longer cable lengths are achieved with the 1 m-long measuring head and an extension cable. As a general rule, the entire transmission path must be designed for the respective clock frequency. For this reason, the sole use of extension cables specified and approved for the measuring system is recommended. Any interruptions in the signal line, due to slip rings for example, should also be avoided.

The digital interface is compatible with the following controller and its subsequent generations:

- Siemens Sinumerik from 840D sl

The measuring systems are self-configuring. No parameters specific to the measuring system have to be entered into the controller.

### Absolute interface FANUC ai

The Fanuc05 interface (interface version High Resolution Type B) is a serial, digital interface used for outputting absolute positional values.

The data DATA are transmitted synchronously with the CLOCK signal provided by the electronic post-processor.

The measuring systems are not self-configuring, therefore parameters specific to the measuring system have to be entered into the controller.

### Absolute interface SSI+1Vss

The SSI interface is a serial, digital interface for outputting absolute positional values.

The measuring system outputs two analogue voltage signals, SIN and COS, via the incremental 1 V<sub>pp</sub> interface which can be highly interpolated in the electronic post-processor.

The sinusoidal incremental signals SIN and COS have an electrical phase-offset of 90° and a nominal amplitude of 1 V<sub>pp</sub>.


The data DATA are transmitted synchronously with the CLOCK signal provided by the electronic post-processor.

In addition, 3 places are available for special bits (Error, Warning, Parity), where the Warning bit is inactive and constantly at 0. If an internal error is detected in the measuring head, the error bit is set to 1.

24 Timing interface SSI

|                 |                |         |
|-----------------|----------------|---------|
|                 |                |         |
| Clock frequency | from           | 200 kHz |
|                 | to             | 1 MHz   |
| Monoflop time   | t <sub>m</sub> | 30 μs   |

|                               |            |               |
|-------------------------------|------------|---------------|
| Number of bits m              | MHA...-0-0 | 31            |
|                               | MHA...-2-0 | 31            |
| Number of data bits N         | MHA...-0-0 | 28            |
|                               | MHA...-2-0 | 28            |
| Type of special bits          | S0         | Parity [even] |
|                               | S1         | Warning       |
|                               | S2         | Error         |
| Logical state of special bits |            | Active High   |

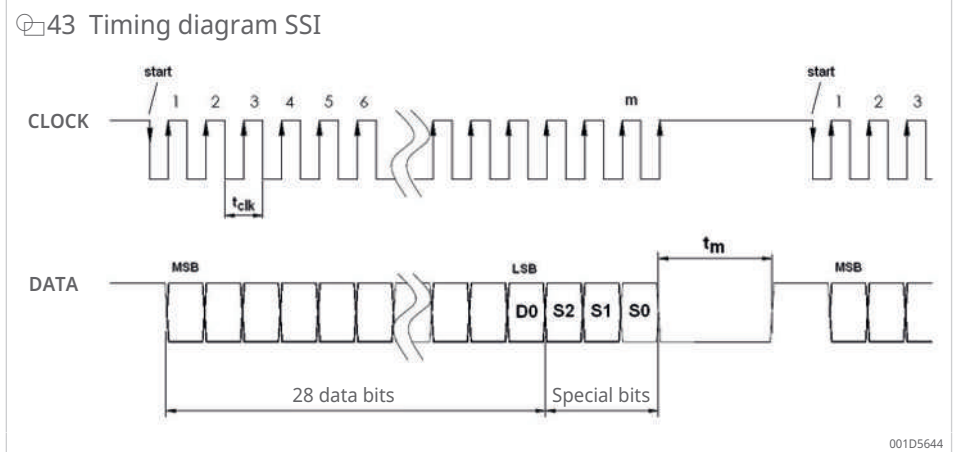

The SSI+1Vss interface is compatible, via the sensor modules SMC20, SMC30, SME25 and SME125 from firmware version 2,4, with the following controllers and their subsequent generations:

- Siemens Sinumerik from 840D sl
- Siemens Sinamics S120

### Incremental interface SIN COS 1Vss + REF

The measuring system outputs two analogue voltage signals, SIN and COS, via the incremental 1 Vpp interface which can be highly interpolated in the electronic post-processor, as well as a pitch-coded reference signal REF.

The sinusoidal incremental signals SIN and COS have an electrical phase-offset of 90° and a nominal amplitude of 1 Vpp.

The SIN COS interface is compatible, via the sensor modules SMC20, SME20 and SME120, with the following controllers and their subsequent generations:

- Siemens Sinumerik from 840D sl
- Siemens Sinamics S120


The incremental measuring systems SIN COS 1Vss are not self-configuring, therefore the parameters which are specific to the measuring system have to be entered into the controller and are made available to the user on request.

### 2.2.4 Connector assignment for interfaces

#### EnDat 2.2, DRIVE-CLiQ®, FANUC ai

2

44 Plug connection interface

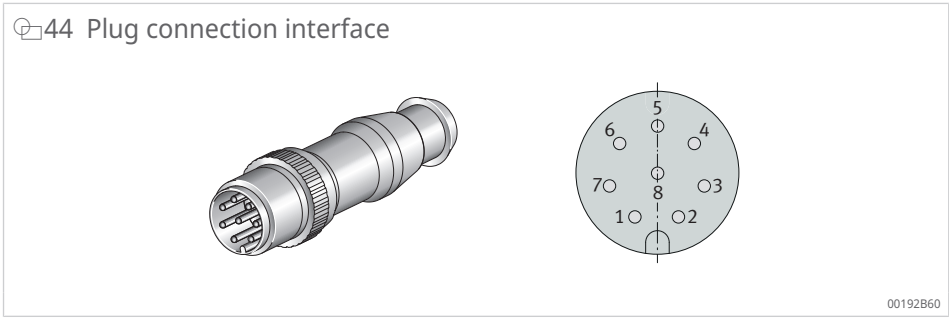


00192B60

25 Connector assignment

| Parameters                            | Signal designation | PIN | Cable colour |
|---------------------------------------|--------------------|-----|--------------|
| Power supply                          | Up                 | 8   | Green/brown  |
|                                       | Sensor Up          | 2   | Blue         |
|                                       | 0 V                | 5   | Green/white  |
|                                       | Sensor 0 V         | 1   | White        |
| Signals for absolute positional value | DATA+              | 3   | Grey         |
|                                       | DATA-              | 4   | Pink         |
|                                       | CLOCK+             | 7   | Purple       |
|                                       | CLOCK-             | 6   | Yellow       |

#### SSI+1Vss

45 Plug connection interface

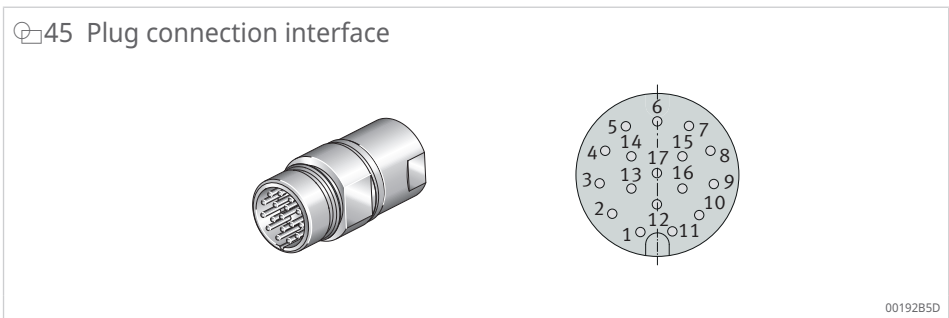


00192B5D

26 Connector assignment

| Parameters                            | Signal designation | PIN | Cable colour |
|---------------------------------------|--------------------|-----|--------------|
| Power supply                          | Up                 | 7   | Green/brown  |
|                                       | Sensor Up          | 1   | Blue         |
|                                       | 0 V                | 10  | Green/white  |
|                                       | Sensor 0 V         | 4   | White        |
| Incremental signals                   | A+                 | 15  | Brown        |
|                                       | A-                 | 16  | Green        |
|                                       | B+                 | 12  | Grey         |
|                                       | B-                 | 13  | Pink         |
| Signals for absolute positional value | DATA+              | 14  | Red          |
|                                       | DATA-              | 17  | Black        |
|                                       | CLOCK+             | 8   | Violet       |
|                                       | CLOCK-             | 9   | Yellow       |

## SIN COS 1Vss + REF

46 Plug connection interface SIN COS 1Vss + REF

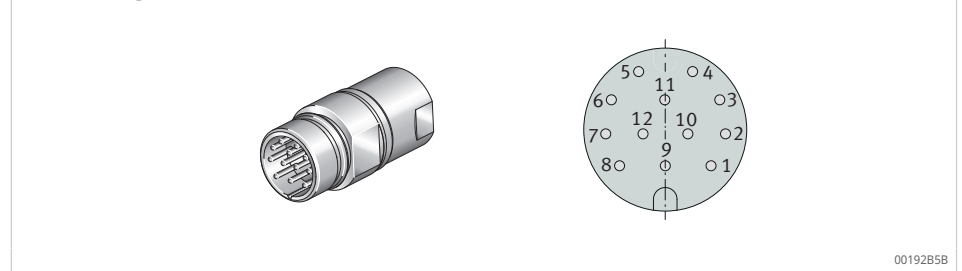

00192B58

27 Connector assignment

| Parameters     | Signal designation | PIN | Cable colour |
|----------------|--------------------|-----|--------------|
| Power supply   | Up                 | 12  | Green/brown  |
|                | Sensor Up          | 2   | Blue         |
|                | 0 V                | 10  | Green/white  |
|                | Sensor 0 V         | 11  | White        |
| Output signals | A+                 | 5   | Brown        |
|                | A-                 | 6   | Green        |
|                | B+                 | 8   | Grey         |
|                | B-                 | 1   | Pink         |
|                | REF+               | 3   | Red          |
|                | REF-               | 4   | Black        |
| Other signals  | Diag+              | 7   | Violet       |
|                | Diag-              | 9s  | Yellow       |

## 2.2.5 Functional safety

The angular measuring systems with digital electronic interfaces EnDat 2.2, DRIVE-CLiQ® and with the analogue interface SIN COS 1Vss are intended for positional determination on rotary axes in applications with a safety focus. These angular measuring systems can be used under normal conditions and in authorised operation for safety-related positioning control loops in applications with a safety focus to IEC 61508 and DIN EN ISO 13849-1.

In addition to the electronic interface, the mechanical connection of the measuring device to the drive also has safety implications. In many cases, an error exclusion must be demonstrated for the loosening of mechanical connections, as such errors cannot necessarily be detected by the controller.

According to standard DIN EN 61800-5-2:2017, Table D.8, Electrical power drive systems with adjustable speed, loosening of the mechanical connection between the measuring system and the drive is listed as an error case that must be considered.

In order to be able to use the angular measuring system in a safety-focussed application, the user must use a suitable controller. The fundamental task of the controller is to communicate with the measuring system and reliably evaluate the measuring system data. For safety-related analyses of the entire system, safety parameters for the angular measuring systems, as well as error lists and error exclusions for motion sensors and position feedback sensors, in accordance with DIN EN 61800-5-2:2017, Table D.8, are available on request.

### Responsibilities of the angular measuring system user

- correct implementation, on the machine side, of signal monitoring for digital interfaces and the SIN COS 1Vss analogue interface in accordance with safety integrity, e.g. specification and implementation of the evaluation circuit and evaluation logic.
- Evaluation of the safety integrity of the measuring system in its application environment, based on the technical data provided, e.g. MTTFd.
- Correct design, on the application side, of the adjacent construction of the measuring system bearing in accordance with the design specifications.
- Correct fitting and assembly of the measuring system bearing in accordance with the mounting manual.
- Correct fitting and assembly of the measuring head in accordance with the mounting manual.


### Documentation for the intended use of the angular measuring system

- product information
- design specifications
- mounting instructions
- safety parameters of the angular measuring system
- error lists and error exclusions for motion sensors and position feedback sensors
- CE Declaration of Conformity (by agreement)
- specification of a reliable controller from the respective controller manufacturer
- datasheet for encoder system connection to sensor module

## 2.2.6 Structure of the ordering designation

### MHA


47 Structure of the ordering designation for absolute measuring head MHA

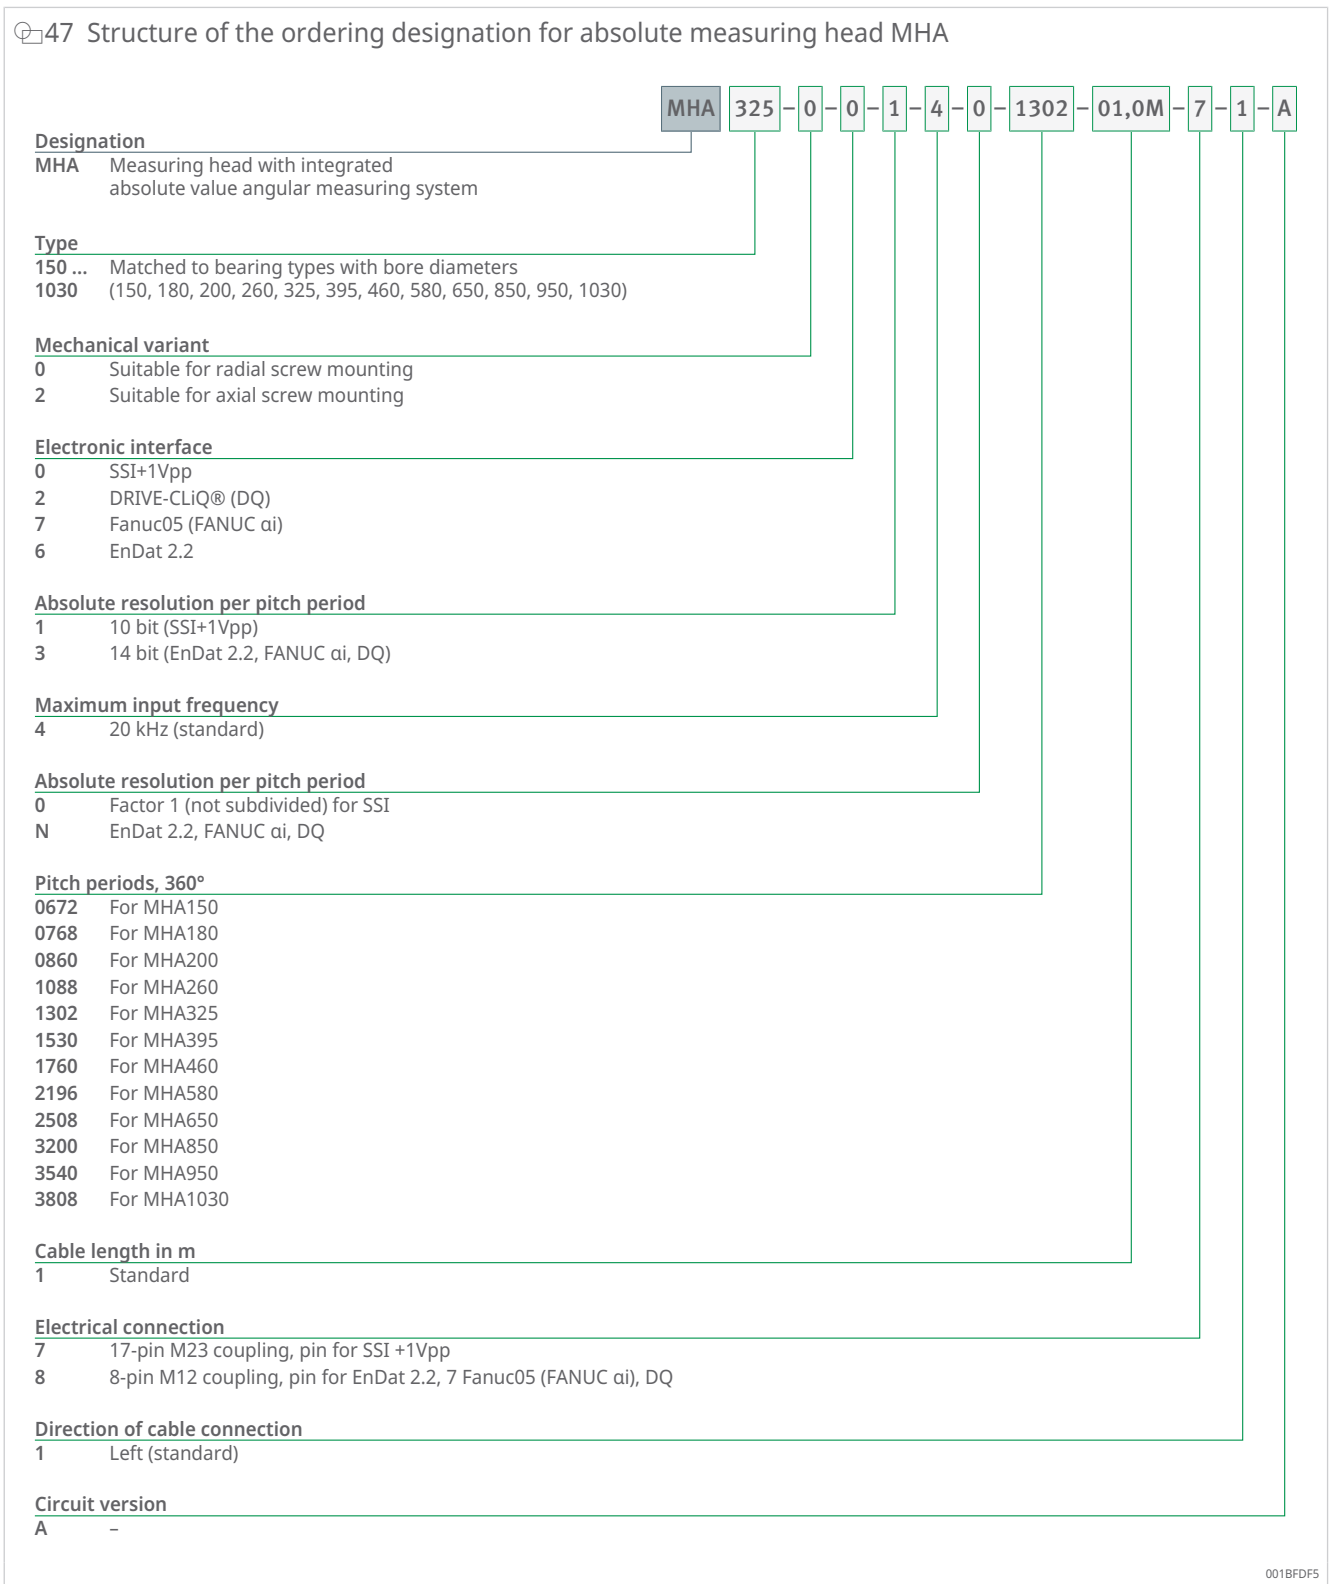

001BFDF5

## MHI

## 48 Structure of the ordering designation for incremental measuring head MHI

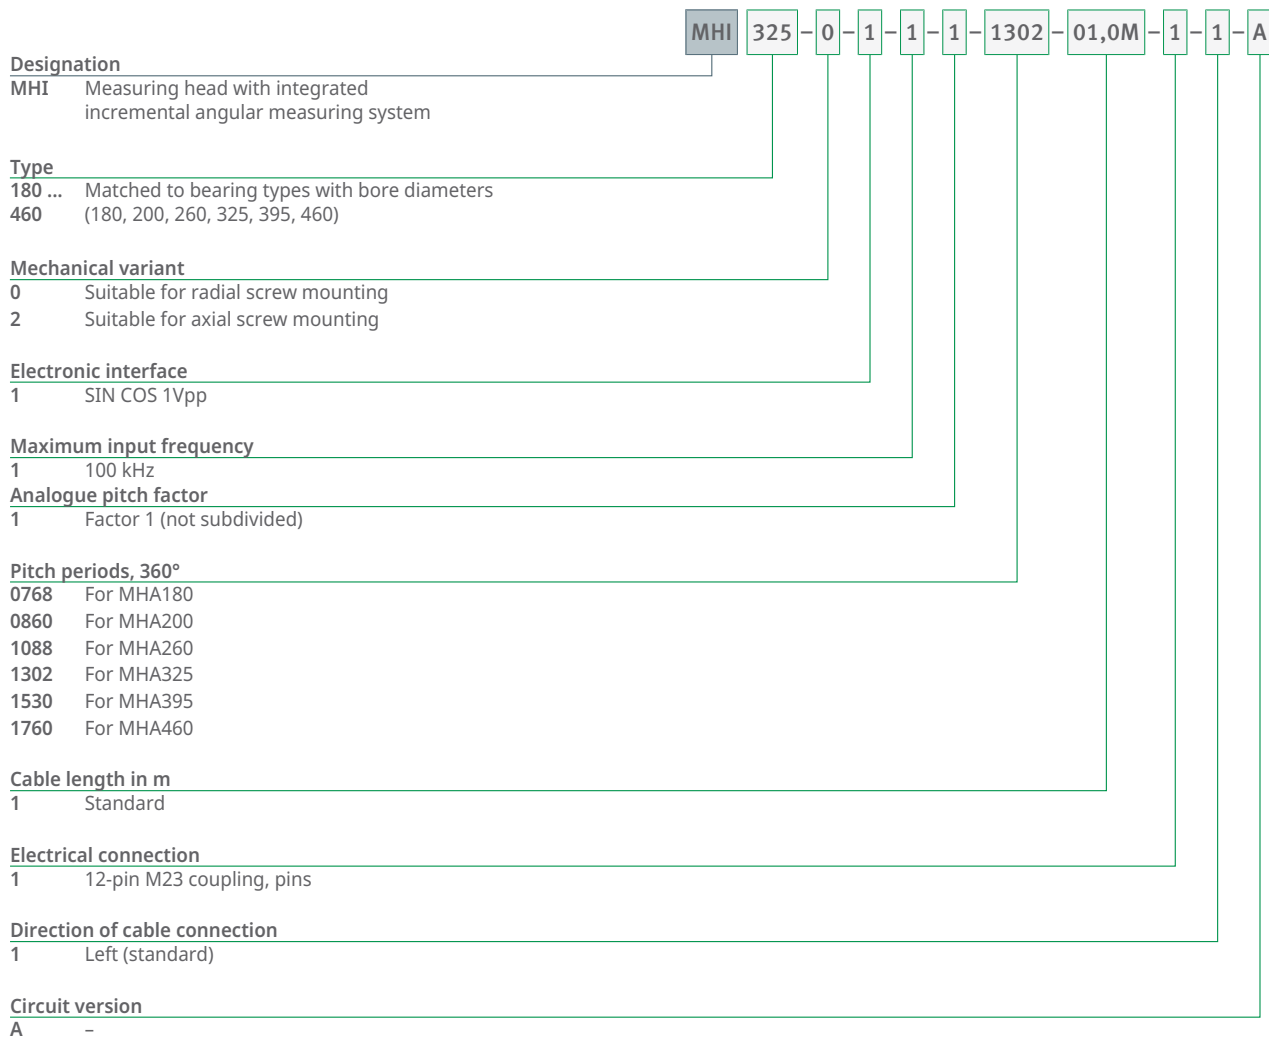

001BFE05

## 2.2.7 Technical data

## 2.2.7.1 Angular resolution

The achievable angular resolution, i.e. the number of analogue output signal periods (pitch periods) for incremental measuring systems or the smallest possible resolvable angular step for absolute measuring systems with digital interfaces, depends on the diameter of the measuring system bearing. The system accuracy also depends on the diameter of the measuring system bearing.

Further influencing factors on angular resolution include:

- Pitch accuracy of the measurement ring.
- Positional deviations within a signal period.
- Scanning quality of the measuring head.
- Quality of the electronic signal processing system in the measuring head.
- Eccentricity of the bearing outer ring and measurement ring relative to the theoretical axis of rotation.
- Roundness of the bearing outer ring.

### 28 Angular resolution YRTCMA, YRTSMA

| Designation             | Pitch periods<br>n/U | Angular resolution |                                       |
|-------------------------|----------------------|--------------------|---------------------------------------|
|                         |                      | SSI+1Vss<br>1/U    | EnDat 2.2,<br>Fanuc05,<br>DQ<br>bit/U |
| YRTCMA150-XL            | 672                  | 672×1024           | 23                                    |
| YRTCMA180-XL            | 768                  | 768×1024           | 23                                    |
| YRTCMA200-XL, YRTSMA200 | 860                  | 860×1024           | 23                                    |
| YRTCMA260-XL, YRTSMA260 | 1088                 | 1088×1024          | 24                                    |
| YRTCMA325-XL, YRTSMA325 | 1302                 | 1302×1024          | 24                                    |
| YRTCMA395-XL, YRTSMA395 | 1530                 | 1530×1024          | 24                                    |
| YRTCMA460-XL, YRTSMA460 | 1760                 | 1760×1024          | 24                                    |
| YRTCMA580-XL            | 2196                 | 2196×1024          | 25                                    |
| YRTCMA650-XL            | 2508                 | 2508×1024          | 25                                    |
| YRTCMA850-XL            | 3200                 | 3200×1024          | 25                                    |
| YRTCMA950-XL            | 3540                 | 3540×1024          | 25                                    |
| YRTCMA1030-XL           | 3808                 | 3808×1024          | 25                                    |

n                    -                    Quantity  
U                    -                    Revolution

For the incremental measuring system bearings YRTCMI, the base pitch of the reference marks is also specified.

### 29 Angular resolution YRTCMI

| Designation  | Pitch periods | Basic pitch of the reference marks |
|--------------|---------------|------------------------------------|
|              | n/U           | Pitch periods                      |
| YRTCMI180-XL | 768           | 48                                 |
| YRTCMI200-XL | 860           | 86                                 |
| YRTCMI260-XL | 1088          | 64                                 |
| YRTCMI260-XL | 1302          | 62                                 |
| YRTCMI395-XL | 1530          | 90                                 |
| YRTCMI460-XL | 1760          | 80                                 |

n                    -                    Quantity  
U                    -                    Revolution

#### 2.2.7.2 System accuracy

The listed values for system accuracy without compensation are maximum approved values that will not be exceeded. Some of the influencing variables lead to reproducible error quotas and some to non-reproducible error quotas. The reproducible error quotas can be determined metrologically with the aid of reference marks, stored in the controller as a correction table and compensated for mathematically. The values listed in the "System accuracy with compensation" column can be achieved with the aid of this compensation method.

The following influencing variables are excluded from the system accuracy specification:

- mechanical deviations due to mounting
- external electronic influences
- resolution of the positional regulator or controller

### 30 System accuracy YRTCMA, YRTSMA

| Designation             | Pitch periods | System accuracy      |                   |
|-------------------------|---------------|----------------------|-------------------|
|                         |               | Without compensation | With compensation |
|                         | n/U           | arcmin               | arcmin            |
| YRTCMA150-XL            | 672           | ±9,7                 | ±3                |
| YRTCMA180-XL            | 768           | ±9,3                 | ±2,6              |
| YRTCMA200-XL, YRTSMA200 | 860           | ±8,3                 | ±2,3              |
| YRTCMA260-XL, YRTSMA260 | 1088          | ±6,6                 | ±1,8              |
| YRTCMA325-XL, YRTSMA325 | 1302          | ±6                   | ±1,5              |
| YRTCMA395-XL, YRTSMA395 | 1530          | ±5,1                 | ±1,3              |
| YRTCMA460-XL, YRTSMA460 | 1760          | ±4,4                 | ±1,1              |
| YRTCMA580-XL            | 2196          | ±6,2                 | ±1,3              |
| YRTCMA650-XL            | 2508          | ±5,4                 | ±1,1              |
| YRTCMA850-XL            | 3200          | ±4,3                 | ±0,9              |
| YRTCMA950-XL            | 3540          | ±3,9                 | ±0,8              |
| YRTCMA1030-XL           | 3808          | ±3,6                 | ±0,7              |

n - Quantity  
U - Revolution

### 31 System accuracy YRTCFMI

| Designation   | Pitch periods | System accuracy      |                   |
|---------------|---------------|----------------------|-------------------|
|               |               | Without compensation | With compensation |
|               | n/U           | arcmin               | arcmin            |
| YRTCFMI180-XL | 768           | ±11,9                | ±5,1              |
| YRTCFMI200-XL | 860           | ±10,6                | ±4,6              |
| YRTCFMI260-XL | 1088          | ±8,4                 | ±3,6              |
| YRTCFMI260-XL | 1302          | ±7,5                 | ±3                |
| YRTCFMI395-XL | 1530          | ±6,4                 | ±2,6              |
| YRTCFMI460-XL | 1760          | ±5,5                 | ±2,2              |

n - Quantity  
U - Revolution

## 2.2.7.3 Technical data for absolute measuring heads MHA

### 32 Technical data for MHA

| Characteristics         | Unit | EnDat 2.2       | FANUC ai        | DRIVE-CLiQ®     | SSI+1Vss             |
|-------------------------|------|-----------------|-----------------|-----------------|----------------------|
| Designation             | -    | EnDat 2.2       | Fanuc05         | DQ              | SSI+1Vss             |
| Interface               | -    | Digital         | Digital         | Digital         | Digital and analogue |
| Grating period          | µm   | 1000            | 1000            | 1000            | 1000                 |
| Maximum input frequency | kHz  | 20              | 20              | 20              | 20                   |
| Clock frequency         | -    | ≤ 16 MHz        | -               | 100 Mbit/s      | ≤ 1 MHz              |
| Safety parameters       | -    | By agreement    | Not applicable  | By agreement    | By agreement         |
| Supply voltage range DC | V    | 3,6 ... 14      | 3,6 ... 14      | 10 ... 36       | 3,6 ... 14           |
| Power consumption       | W    | 1,5             | 1,5             | 2,1             | 1,5                  |
| Current consumption     | mA   | 300 (at DC 5 V) | 300 (at DC 5 V) | 85 (at DC 24 V) | 300 (at DC 5 V)      |

| Characteristics             |                                  | Unit             | EnDat 2.2                                        | FANUC ai                                         | DRIVE-CLiQ®                                      | SSI+1Vss                 |
|-----------------------------|----------------------------------|------------------|--------------------------------------------------|--------------------------------------------------|--------------------------------------------------|--------------------------|
| Cable                       | Sheath material                  | -                | PUR                                              | PUR                                              | PUR                                              | PUR                      |
|                             | Ends                             | -                | 4×0,09 mm <sup>2</sup><br>4×0,14 mm <sup>2</sup> | 4×0,09 mm <sup>2</sup><br>4×0,14 mm <sup>2</sup> | 4×0,09 mm <sup>2</sup><br>4×0,14 mm <sup>2</sup> | 6×2×0,09 mm <sup>2</sup> |
|                             | Length at measuring head         | m                | 1+0,03                                           | 1+0,03                                           | 1+0,03                                           | 1+0,03                   |
|                             | Diameter                         | mm               | 4,5±0,1                                          | 4,5±0,1                                          | 4,5±0,1                                          | 4,5±0,1                  |
|                             | Bending radius (single bend)     | mm               | ≥ 10                                             | ≥ 10                                             | ≥ 10                                             | ≥ 10                     |
|                             | Bending radius (continuous bend) | mm               | ≥ 50                                             | ≥ 50                                             | ≥ 50                                             | ≥ 50                     |
| Plug connection             | -                                | M12, pins, 8-pin | M12, pins, 8-pin                                 | M12, pins, 8-pin                                 | M23, pins, 17-pin                                |                          |
| Operating temperature range | °C                               | -10 ... +85      | -10 ... +85                                      | -10 ... +85                                      | -10 ... +85                                      |                          |
| Storage temperature range   | °C                               | -20 ... +85      | -20 ... +85                                      | -20 ... +85                                      | -20 ... +85                                      |                          |
| Electrical protection type  | MHA-0                            | -                | IP68                                             | IP68                                             | IP68                                             | IP68                     |
|                             | MHA-2                            | -                | IP67                                             | IP67                                             | IP67                                             | IP67                     |
| Axial/radial bearing        | -                                | YRTCMA, YRTSMA   | YRTCMA, YRTSMA                                   | YRTCMA, YRTSMA                                   | YRTCMA, YRTSMA                                   |                          |

### 2.2.7.4 Technical data for incremental measuring heads MHI

#### 33 Technical data for MHI

| Characteristics             |                                  | Unit              | SIN COS 1Vss             |
|-----------------------------|----------------------------------|-------------------|--------------------------|
| Designation                 |                                  | -                 | SIN COS 1Vss             |
| Interface                   |                                  | -                 | Analogue                 |
| Grating period              |                                  | µm                | 1000                     |
| Maximum input frequency     |                                  | kHz               | 100                      |
| Safety parameters           |                                  | -                 | By agreement             |
| Supply voltage range DC     |                                  | V                 | 4 ... 7                  |
| Power consumption           |                                  | W                 | 1,3                      |
| Current consumption         |                                  | mA                | 260 (at DC 5 V)          |
| Cable                       | Sheath material                  | -                 | PUR                      |
|                             | Ends                             | -                 | 6×2×0,09 mm <sup>2</sup> |
|                             | Length at measuring head         | m                 | 1+0,03                   |
|                             | Diameter                         | mm                | 4,5±0,1                  |
|                             | Bending radius (single bend)     | mm                | ≥ 10                     |
|                             | Bending radius (continuous bend) | mm                | ≥ 50                     |
| Plug connection             | -                                | M23, pins, 12-pin |                          |
| Operating temperature range | °C                               | -10 ... +85       |                          |
| Storage temperature range   | °C                               | -20 ... +85       |                          |
| Electrical protection type  | MHI-0                            | -                 | IP68                     |
|                             | MHI-2                            | -                 | IP67                     |
| Axial/radial bearing        | -                                | YRTCMI            |                          |

## 2.3 Lubrication

Lubrication information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►11 | 1.2.

## 2.4 Sealing

Bearing sealing information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►13 | 1.3.

## 2.5 Speeds

Speed-related information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►13 | 1.4.

## 2.6 Rigidity

Bearing rigidity information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►14 | 1.5.

## 2.7 Temperature range

Temperature range information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►14 | 1.6.

## 2.8 Internal clearance

Once the bearings have been fitted and fully screw mounted, they are radially and axially clearance-free and preloaded.

## 2.9 Dimensions, tolerances

Dimensional and tolerance information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►16 | 1.9.

CAD files are available for all bearing and measuring head series, which can be provided upon request or downloaded from the Schaeffler website.

## 2.10 Structure of the ordering designation

### 49 Structure of the ordering designation for absolute measuring system bearings YRTCMA

YRTC MA 325 - 03 - 1302 - XL

**Designation**

**YRTC** Axial/radial roller bearing, double direction, for screw mounting

**Measuring system**

**MA** Absolute value angular measuring system

**Bore diameter**

**150 ...** Available bore diameters  
**1030** (150, 180, 200, 260, 325, 395, 460, 580, 650, 850, 950, 1030)

**Pitch accuracy**

**03** ±3µm for YRTCMA150 to YRTCMA460  
**05** ±5µm for YRTCMA580 to YRTCMA1030

**Pitch periods, 360°**

**0672** For YRTCMA150  
**0768** For YRTCMA180  
**0860** For YRTCMA200  
**1088** For YRTCMA260  
**1302** For YRTCMA325  
**1530** For YRTCMA395  
**1760** For YRTCMA460  
**2196** For YRTCMA580  
**2508** For YRTCMA650  
**3200** For YRTCMA850  
**3540** For YRTCMA950  
**3808** For YRTCMA1030

**Premium brand**

**XL** X-life

001BFE15

### 50 Structure of the ordering designation for absolute measuring system bearings YRTSMA

YRTS MA 325 - 03 - 1302

**Designation**

**YRTS** Axial/radial roller bearing, double direction, for screw mounting, for higher speeds

**Measuring system**

**MA** Absolute value angular measuring system

**Bore diameter**

**200 ...** Available bore diameters  
**460** (200, 260, 325, 395, 460)

**Pitch accuracy**


**03** ±3µm

**Pitch periods, 360°**

**0860** For YRTSMA200  
**1088** For YRTSMA260  
**1302** For YRTSMA325  
**1530** For YRTSMA395  
**1760** For YRTSMA460

001BFE25

51 Structure of the ordering designation for incremental measuring system bearings YRTCMI

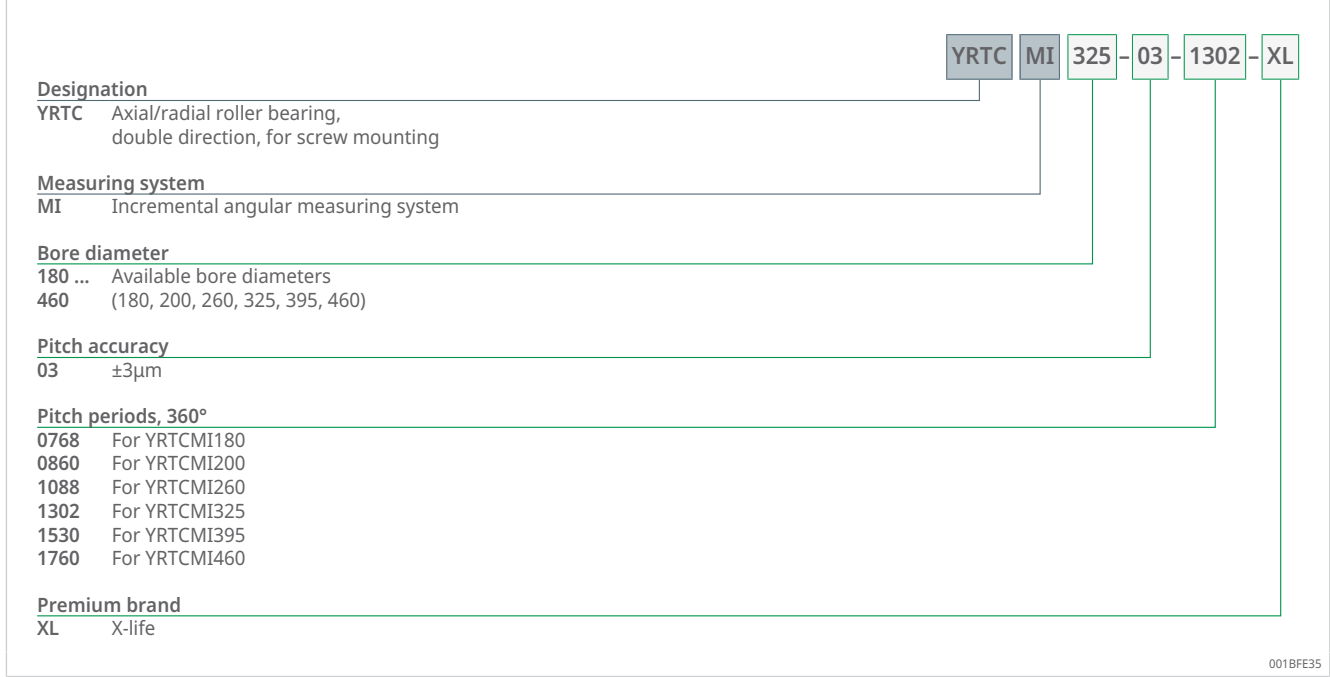

## 2.11 Design of the adjacent construction

Information on the design of the adjacent construction can be found in the sections for axial/radial bearings and axial angular contact ball bearings ▶32 | 1.12.

### 2.11.1 Adjacent construction


Measuring head MHA-0, which is suitable for radial screw mounting, has a flange into which a circumferential groove, containing an O-ring, is incorporated. The purpose of this O-ring is to protect the interior of the rolling bearing against external environmental influences and to retain the rolling bearing grease.

52 Measuring head suitable for radial screw mounting MHA-0



A suitable opening, with dimensions matched to this seal, can be milled into the axis housing.

53 Opening dimensions for measuring head suitable for radial screw mounting MHA-0

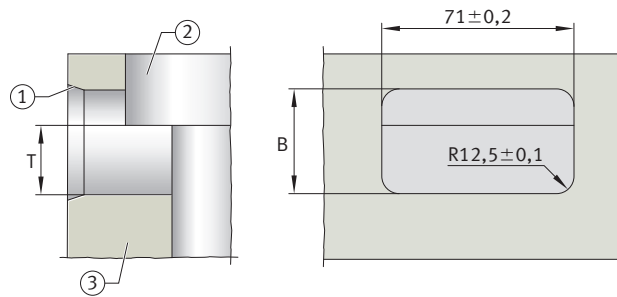

001949AA

|   |                          |   |                                                                                |
|---|--------------------------|---|--------------------------------------------------------------------------------|
| 1 | Joining bevel for O-ring | 2 | Observe installation position of the bearing and measuring head in the housing |
| 3 | Housing, customer side   |   |                                                                                |

54 Opening dimensions for measuring head suitable for radial screw mounting MHA-0

| Designation                           | T    |      |      | B  |      |      |
|---------------------------------------|------|------|------|----|------|------|
|                                       | -    | U    | L    | -  | U    | L    |
|                                       | mm   | mm   | mm   | mm | mm   | mm   |
| YRTCMA180-XL, YRTCMI180-XL            | 30,5 | +0,1 | -0,1 | 50 | +0,1 | -0,1 |
| YRTCMA200-XL, YRTSMA200, YRTCMI200-XL | 30,5 | +0,1 | -0,1 | 50 | +0,1 | -0,1 |
| YRTCMA260-XL, YRTSMA260, YRTCMI260-XL | 30,5 | +0,1 | -0,1 | 53 | +0,1 | -0,1 |
| YRTCMA325-XL, YRTSMA325, YRTCMI325-XL | 30,5 | +0,1 | -0,1 | 55 | +0,1 | -0,1 |
| YRTCMA395-XL, YRTSMA395, YRTCMI395-XL | 30,5 | +0,1 | -0,1 | 55 | +0,1 | -0,1 |
| YRTCMA460-XL, YRTSMA460, YRTCMI460-XL | 30,5 | +0,1 | -0,1 | 57 | +0,1 | -0,1 |
| YRTCMA580-XL                          | 34,5 | +0,1 | -0,1 | 69 | +0,1 | -0,1 |
| YRTCMA650-XL                          | 39,5 | +0,1 | -0,1 | 78 | +0,1 | -0,1 |

|   |    |                       |
|---|----|-----------------------|
| B | mm | Width                 |
| T | mm | Depth                 |
| U | mm | Upper limit deviation |
| L | mm | Lower limit deviation |

## 2.12 Fitting and dismantling

Fitting information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ▶40 | 1.13.

## 2.13 Product tables

### 2.13.1 Explanations of the product tables


|                 |                   |                                                                                       |
|-----------------|-------------------|---------------------------------------------------------------------------------------|
| 1               | -                 | Two retaining screws                                                                  |
| 2               | -                 | Screw counterbores in the L-section ring open to the bearing bore                     |
| a               | mm                | Countersink depth                                                                     |
| C               | mm                | Outer ring width                                                                      |
| C <sub>0a</sub> | N                 | Basic static load rating, axial                                                       |
| C <sub>0r</sub> | N                 | Basic static load rating, radial                                                      |
| C <sub>a</sub>  | N                 | Basic dynamic load rating, axial                                                      |
| C <sub>aL</sub> | N/μm              | Axial rigidity of bearing position                                                    |
| C <sub>aW</sub> | N/μm              | Axial rigidity of rolling element set                                                 |
| C <sub>kL</sub> | Nm/mrad           | Tilting rigidity of bearing position                                                  |
| C <sub>kW</sub> | Nm/mrad           | Tilting rigidity of rolling element set                                               |
| C <sub>r</sub>  | N                 | Basic dynamic load rating, radial                                                     |
| C <sub>rL</sub> | N/μm              | Radial rigidity of bearing position                                                   |
| C <sub>rW</sub> | N/μm              | Radial rigidity of rolling element set                                                |
| d               | mm                | Bore diameter                                                                         |
| D               | mm                | Outside diameter                                                                      |
| d <sub>1</sub>  | mm                | Diameter of fastening hole, inner ring                                                |
| D <sub>1</sub>  | mm                | Inner ring diameter                                                                   |
| d <sub>2</sub>  | mm                | Countersink diameter, fixing hole                                                     |
| d <sub>3</sub>  | mm                | Diameter of fixing holes, outer ring                                                  |
| G               | -                 | Extraction threads                                                                    |
| H               | mm                | Height                                                                                |
| H <sub>1</sub>  | mm                | Contact surface height, outer ring                                                    |
| H <sub>2</sub>  | mm                | Contact surface height, outer ring                                                    |
| J               | mm                | Pitch circle diameter of fixing holes, inner ring                                     |
| J <sub>1</sub>  | mm                | Pitch circle diameter of fixing holes, outer ring                                     |
| m               | kg                | Mass                                                                                  |
| M <sub>A</sub>  | Nm                | Tightening torque for fixing screws according to DIN EN ISO 4762, strength class 10.9 |
| M <sub>R</sub>  | Nm                | Frictional torque                                                                     |
| n               | -                 | Number of screw mounting holes                                                        |
| n <sub>A</sub>  | -                 | Number of fixing screws, outer ring                                                   |
| n <sub>G</sub>  | min <sup>-1</sup> | Limiting speed                                                                        |
| n <sub>GA</sub> | -                 | Number of extraction threads                                                          |
| n <sub>I</sub>  | -                 | Number of fixing screws, inner ring                                                   |
| t               | °                 | Pitch angle of fixing holes                                                           |



2.13.2 YRTCMA, main dimensions, performance data


Double direction  
With absolute value angular measuring system

2

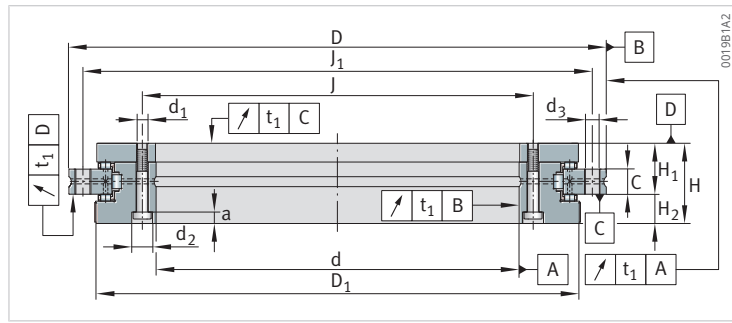


YRTCMA

| Designation  | d   | D   | H    | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J   | J <sub>1</sub> |
|--------------|-----|-----|------|----------------|----------------|----|------------------------|-----|----------------|
| -            | mm  | mm  | mm   | mm             | mm             | mm | mm                     | mm  | mm             |
| YRTCMA150-XL | 150 | 240 | 47   | 26             | 21             | 12 | 214,5                  | 165 | 225            |
| YRTCMA180-XL | 180 | 280 | 50   | 29             | 21             | 15 | 245,1                  | 194 | 260            |
| YRTCMA200-XL | 200 | 300 | 51   | 30             | 21             | 15 | 274,4                  | 215 | 285            |
| YRTCMA260-XL | 260 | 385 | 57,5 | 36,5           | 21             | 18 | 347                    | 280 | 365            |
| YRTCMA325-XL | 325 | 450 | 61   | 40             | 21             | 20 | 415,1                  | 342 | 430            |
| YRTCMA395-XL | 395 | 525 | 65   | 42,5           | 22,5           | 20 | 487,7                  | 415 | 505            |
| YRTCMA460-XL | 460 | 600 | 70   | 46             | 24             | 22 | 560,9                  | 482 | 580            |

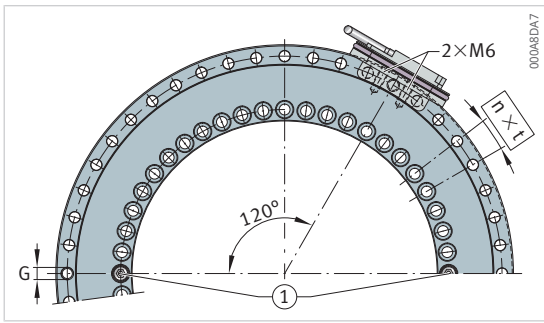

Hole pattern, measuring head suitable for radial screw mounting

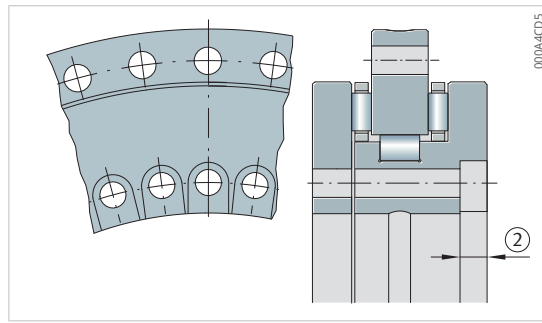

YRTCMA325-XL


| $C_a$  | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$             | $M_R$ | $m$  |
|--------|----------|--------|----------|-------------------|-------|------|
| N      | N        | N      | N        | $\text{min}^{-1}$ | Nm    | kg   |
| 128000 | 650000   | 74000  | 146000   | 800               | 4     | 6,7  |
| 134000 | 730000   | 100000 | 200000   | 600               | 5     | 8,5  |
| 147000 | 850000   | 123000 | 275000   | 450               | 6     | 10,7 |
| 168000 | 1090000  | 140000 | 355000   | 300               | 9     | 18,7 |
| 247000 | 1900000  | 183000 | 530000   | 200               | 13    | 25   |
| 265000 | 2190000  | 200000 | 640000   | 200               | 19    | 33   |
| 290000 | 2550000  | 265000 | 880000   | 150               | 25    | 45   |

2.13.3 YRTCMA, mounting dimensions, rigidity values

Double direction


With absolute value angular measuring system

2

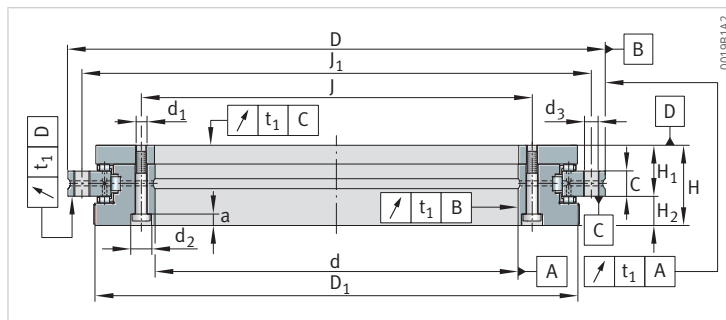


YRTCMA

| Designation  | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|--------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -            | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTCMA150-XL | 7              | 11             | 6,2 | 34             | 7              | 33             | 14             |
| YRTCMA180-XL | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTCMA200-XL | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTCMA260-XL | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTCMA325-XL | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTCMA395-XL | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTCMA460-XL | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |

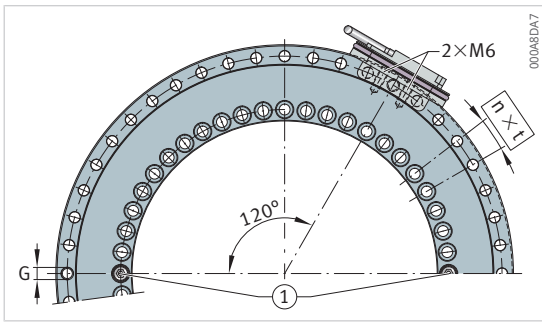


Hole pattern, measuring head suitable for radial screw mounting

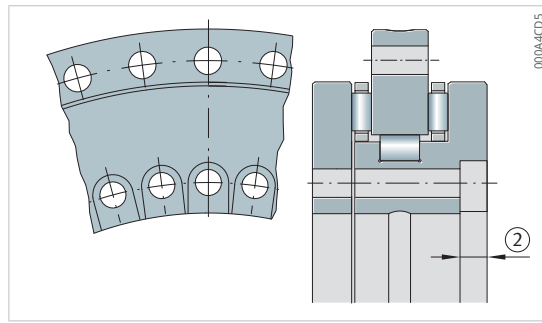


YRTCMA325-XL

| n  | t   | G   | n <sub>GA</sub> | CaL   | CrL  | CkL     | CaW   | CrW   | CkW     |
|----|-----|-----|-----------------|-------|------|---------|-------|-------|---------|
| -  | °   | -   | -               | N/μm  | N/μm | Nm/mrad | N/μm  | N/μm  | Nm/mrad |
| 36 | 10  | M8  | 3               | 7600  | 4480 | 30300   | 12000 | 4800  | 61000   |
| 48 | 7,5 | M8  | 3               | 9400  | 5000 | 46000   | 13500 | 5300  | 88500   |
| 48 | 7,5 | M8  | 3               | 9800  | 5700 | 64000   | 15500 | 6200  | 128000  |
| 36 | 10  | M12 | 3               | 13800 | 7400 | 166000  | 19000 | 8100  | 265000  |
| 36 | 10  | M12 | 3               | 14200 | 8800 | 254000  | 33000 | 9900  | 633000  |
| 48 | 7,5 | M12 | 3               | 19800 | 8100 | 448000  | 37000 | 13000 | 1002000 |
| 48 | 7,5 | M12 | 3               | 24000 | 9100 | 686000  | 43000 | 17000 | 1543000 |



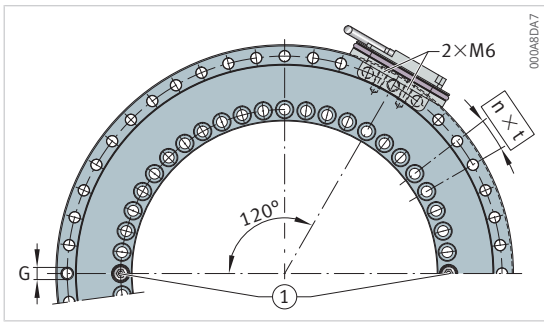

Hole pattern, measuring head suitable for radial screw mounting

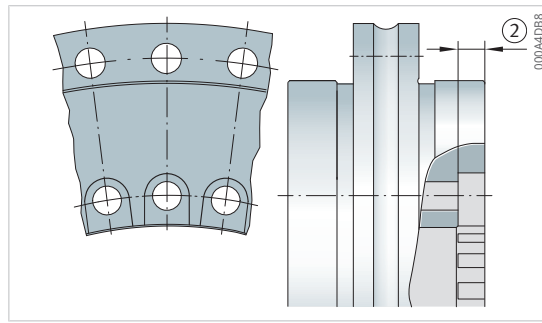


YRTSMA325

| $C_a$  | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$             | $M_R$ | $m$  |
|--------|----------|--------|----------|-------------------|-------|------|
| N      | N        | N      | N        | $\text{min}^{-1}$ | Nm    | kg   |
| 155000 | 840000   | 94000  | 226000   | 1160              | -     | 10,7 |
| 173000 | 1050000  | 110000 | 305000   | 910               | -     | 18,7 |
| 191000 | 1260000  | 109000 | 320000   | 760               | -     | 25   |
| 214000 | 1540000  | 121000 | 390000   | 650               | -     | 33   |
| 221000 | 1690000  | 168000 | 570000   | 560               | -     | 45   |

2.13.5 YRTSMA, mounting dimensions, rigidity values


Double direction

With absolute value angular measuring system

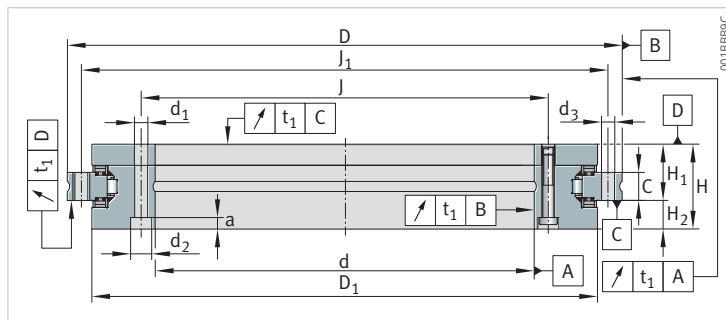


YRTSMA

| Designation | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTSMA200   | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTSMA260   | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTSMA325   | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTSMA395   | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTSMA460   | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |

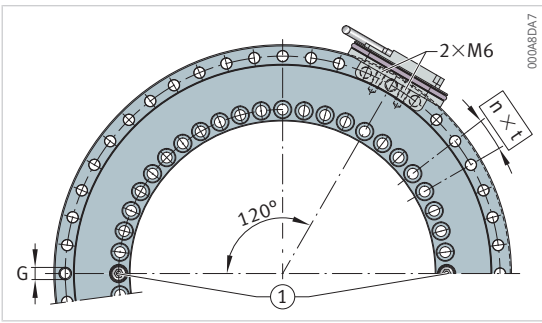

Hole pattern, measuring head suitable for radial screw mounting

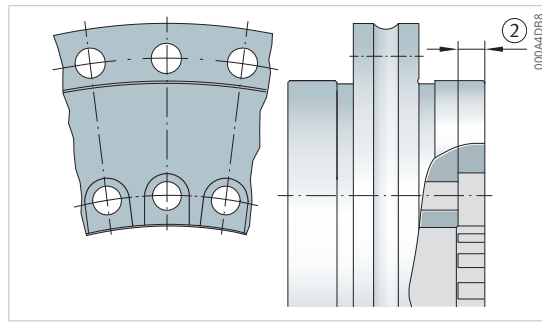


YRTSMA325

| n  | t   | G   | nGA | CaL   | CrL   | CkL     | CaW   | CrW  | CkW     |
|----|-----|-----|-----|-------|-------|---------|-------|------|---------|
| -  | °   | -   | -   | N/μm  | N/μm  | Nm/mrad | N/μm  | N/μm | Nm/mrad |
| 48 | 7,5 | M8  | 3   | 8800  | 17900 | 65600   | 13600 | 3900 | 101000  |
| 36 | 10  | M12 | 3   | 11800 | 23500 | 151500  | 16800 | 5800 | 201000  |
| 36 | 10  | M12 | 3   | 14480 | 9200  | 260000  | 19900 | 7100 | 350000  |
| 48 | 7,5 | M12 | 3   | 17100 | 10200 | 440900  | 23400 | 8700 | 582000  |
| 48 | 7,5 | M12 | 3   | 19500 | 9200  | 633000  | 25400 | 9500 | 843000  |

2.13.6 YRTCMI, main dimensions, performance data


Double direction

With incremental angular measuring system

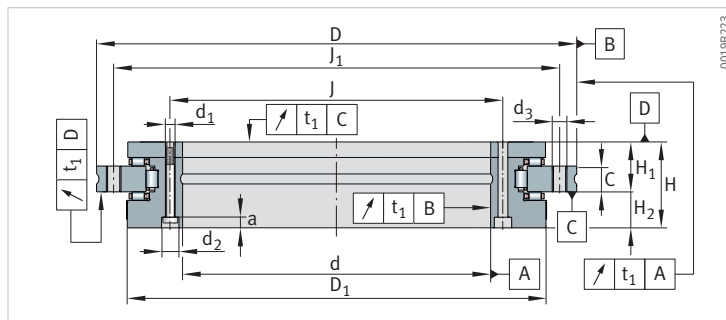

YRTCMI

| Designation          | d   | D   | H    | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J   | J <sub>1</sub> |
|----------------------|-----|-----|------|----------------|----------------|----|------------------------|-----|----------------|
| -                    | mm  | mm  | mm   | mm             | mm             | mm | mm                     | mm  | mm             |
| YRTCMI180-03-0768-XL | 180 | 280 | 50   | 29             | 21             | 15 | 245,1                  | 194 | 260            |
| YRTCMI200-03-0860-XL | 200 | 300 | 51   | 30             | 21             | 15 | 274,4                  | 215 | 285            |
| YRTCMI260-03-1088-XL | 260 | 385 | 57,5 | 36,5           | 21             | 18 | 347                    | 280 | 365            |
| YRTCMI325-03-1302-XL | 325 | 450 | 61   | 40             | 21             | 20 | 415,1                  | 342 | 430            |
| YRTCMI395-03-1530-XL | 395 | 525 | 65   | 42,5           | 22,5           | 20 | 487,7                  | 415 | 505            |
| YRTCMI460-03-1760-XL | 460 | 600 | 70   | 46             | 24             | 22 | 560,9                  | 482 | 580            |

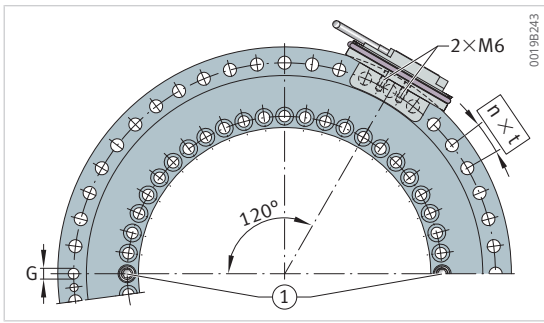


Hole pattern

| <b>C<sub>a</sub></b> | <b>C<sub>0a</sub></b> | <b>C<sub>r</sub></b> | <b>C<sub>0r</sub></b> | <b>n<sub>G</sub></b>    | <b>M<sub>R</sub></b> | <b>m</b>  |
|----------------------|-----------------------|----------------------|-----------------------|-------------------------|----------------------|-----------|
| <b>N</b>             | <b>N</b>              | <b>N</b>             | <b>N</b>              | <b>min<sup>-1</sup></b> | <b>Nm</b>            | <b>kg</b> |
| 134000               | 730000                | 100000               | 200000                | 600                     | 5                    | 8,5       |
| 147000               | 850000                | 123000               | 275000                | 450                     | 6                    | 10,7      |
| 168000               | 1090000               | 140000               | 355000                | 300                     | 9                    | 18,7      |
| 247000               | 1900000               | 183000               | 530000                | 200                     | 13                   | 25        |
| 265000               | 2190000               | 200000               | 640000                | 200                     | 19                   | 33        |
| 290000               | 2550000               | 265000               | 880000                | 150                     | 25                   | 45        |

2.13.7 YRTCMI, mounting dimensions, rigidity values


Double direction

With incremental angular measuring system

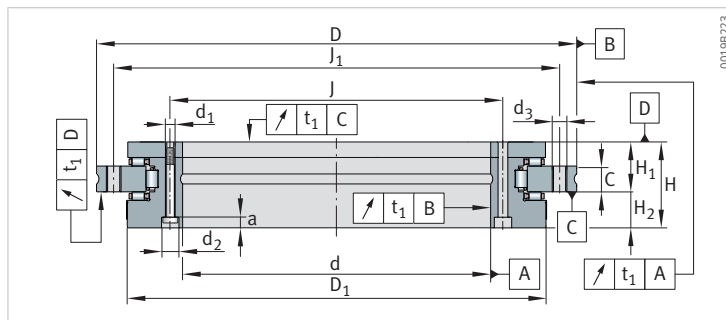

YRTCMI

| Designation          | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|----------------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -                    | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTCMI180-03-0768-XL | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTCMI200-03-0860-XL | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTCMI260-03-1088-XL | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTCMI325-03-1302-XL | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTCMI395-03-1530-XL | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTCMI460-03-1760-XL | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |

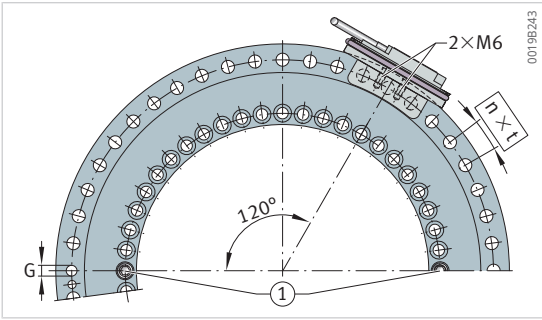

Hole pattern

| n  | t   | G   | n <sub>GA</sub> | CaL   | CrL  | CkL     | CaW   | CrW   | CkW     |
|----|-----|-----|-----------------|-------|------|---------|-------|-------|---------|
| -  | °   | -   | -               | N/μm  | N/μm | Nm/mrad | N/μm  | N/μm  | Nm/mrad |
| 48 | 7,5 | M8  | 3               | 9400  | 5000 | 46000   | 13500 | 5300  | 88500   |
| 48 | 7,5 | M8  | 3               | 9800  | 5700 | 64000   | 15500 | 6200  | 128000  |
| 36 | 10  | M12 | 3               | 13800 | 7400 | 166000  | 19000 | 8100  | 265000  |
| 36 | 10  | M12 | 3               | 14200 | 8800 | 254000  | 33000 | 9900  | 633000  |
| 48 | 7,5 | M12 | 3               | 19800 | 8100 | 448000  | 37000 | 13000 | 1002000 |
| 48 | 7,5 | M12 | 3               | 24000 | 9100 | 686000  | 43000 | 17000 | 1543000 |

### 3 Axial/radial bearings with absolute value angular measuring system

Axial radial bearings with angular measuring system comprise an axial/radial bearing YRTCM or YRTSM, each with a dimensional scale, an SRM electronic measuring system and signal leads SRMC.


#### Advantages of the angular measuring system

- The rigid connection to the adjacent construction enables excellent control characteristics such as control stiffness and dynamic response. These characteristics make the angular measuring system particularly suitable for axes with torque motor drive.
- high maximum measuring speed up to 16,5 m/s
- operates by non-contact means and is therefore not subject to wear
- carries out measurement irrespective of tilting and position
- automatically self-adjusting electronics
- has a self-centring function
- unaffected by lubricants
- Easy to fit, the measuring heads are easily adjustable, there is no need for alignment of the bearing and a separate measuring system.
- no additional mounting parts required
  - Dimensional scale and measuring heads are integrated into the bearing design or the adjacent construction.
  - The resulting space saved can be used for the machine working area.
- No issues with supply lines. The cables can be laid directly through the large bearing bore within the adjacent construction.
- Saves on components, overall design envelope and costs due to the compact, integrated design requiring fewer components.

#### 3.1 Bearing design

Bearings of series YRTCM or YRTSM correspond in mechanical terms to axial/radial bearings YRTC or YRTS, but are additionally equipped with a magnetic dimensional scale. The measuring system can measure angles to an accuracy of a few angular seconds by non-contact, magneto-resistive means.

54 Axial/radial bearings with magnetic dimensional scale YRTCM, YRTSM

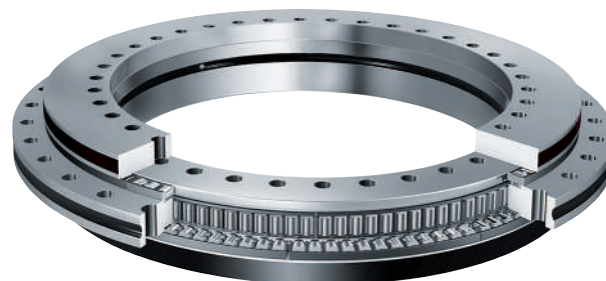


0001A63F

For the mechanical part of axial/radial bearings YRTCM or YRTSM, the information provided for axial/radial bearings and axial angular contact ball bearings applies ►10 | 1.1.

## 3.2 Angular measuring system

55 Axial/radial bearing with incremental angular measuring system

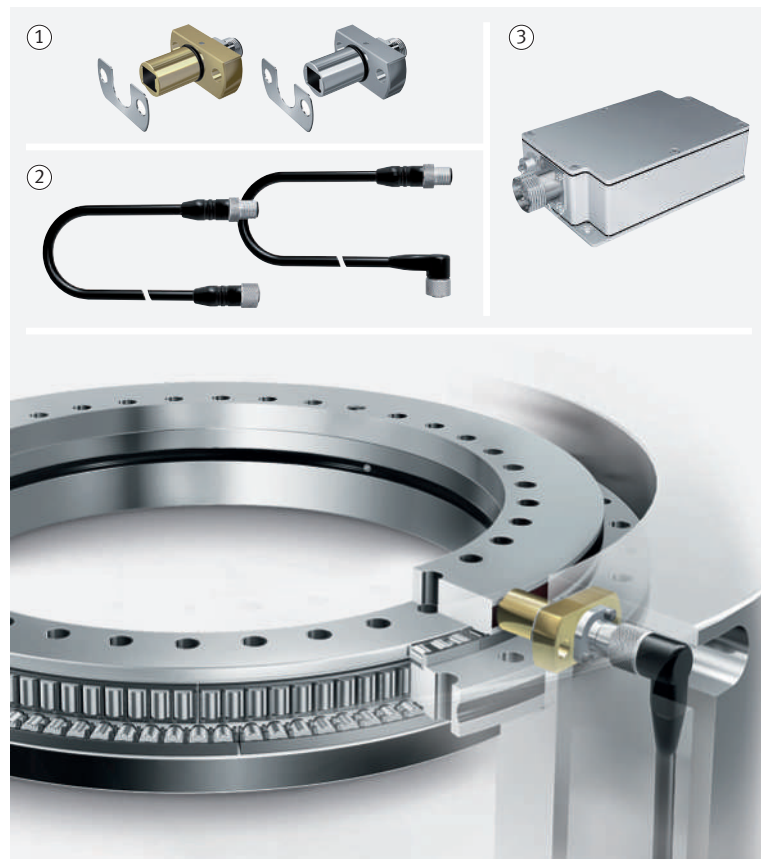

000A8DF9

|   |                                        |   |                       |
|---|----------------------------------------|---|-----------------------|
| 1 | Measuring heads with calibration shims | 2 | Connection cable SRMC |
| 3 | Electronic evaluation system           |   |                       |


The electronic measuring system SRM comprises two measuring heads, two stacks of calibration shims and an electronic evaluation system. The signal leads SRMC for connecting the measuring heads to the electronic evaluation system can be ordered individually in various designs.

The electronic measuring system MEKO/U will continue to be available but should no longer be used for new designs.

### 3.2.1 Dimensional scale

The dimensional scale is applied without seams or joins to the outside diameter of the shaft locating washer. The magnetically hard coating has magnetic poles at a pitch of 250 µm that serve as angle references.


The angular position is measured incrementally, i.e. by counting the individual increments. To establish a fixed datum point for the angular position after the machine is switched on, a reference mark track is therefore required.

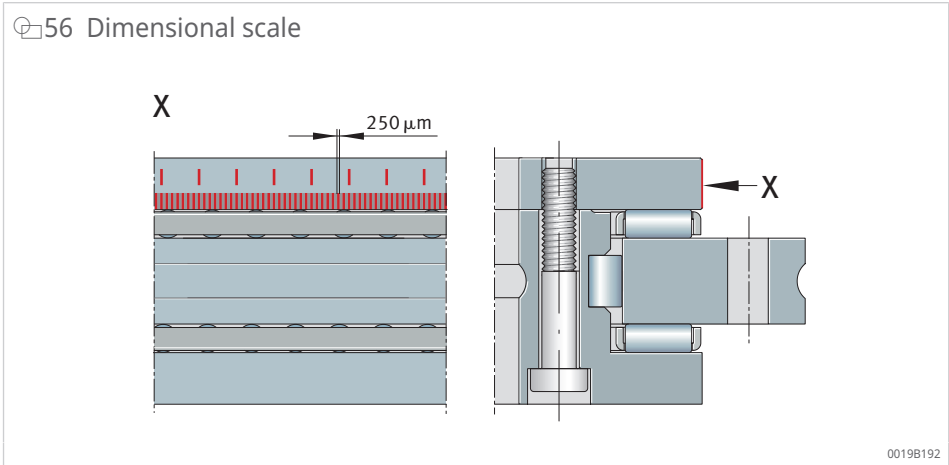

Reference marks

The system has pitch-coded reference marks in order to quickly create the absolute datum point. To achieve this, reference marks are applied at 15° intervals, allowing the absolute datum point to be determined after passing over two adjacent reference marks (maximum 30°).

3.2.2 Measuring heads

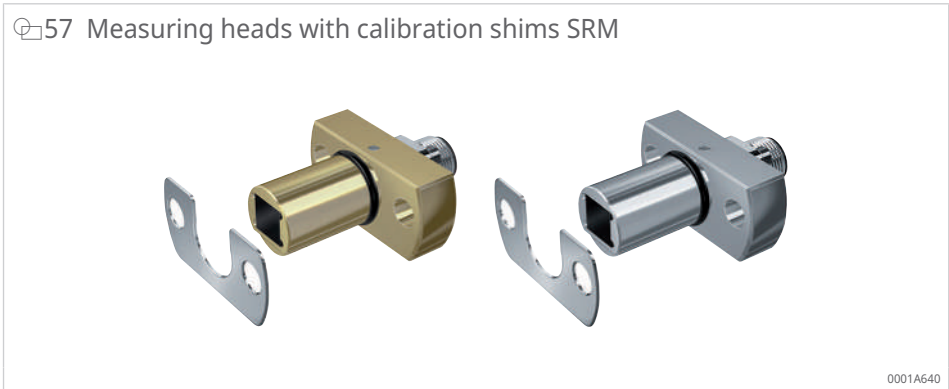

35 Magneto-resistive measuring heads

| Colour        | Measuring head | Function                                           |
|---------------|----------------|----------------------------------------------------|
| White, silver | SRMH01-WH      | Scanning the incremental track                     |
| Yellow, gold  | SRMH01-YE      | Scanning the incremental track and reference marks |

The measuring heads are designed for optimum use of space. They are fixed in a slot in the adjacent construction by means of two fixing screws.


MR effect

The small magnetic fields are detected as a result of the magneto-resistive effect (MR effect). Unlike magnetic heads, the MR sensors allow static measurement of magnetic fields, i.e. electrical signals are derived without movement, in contrast to magnetic heads.

The resistance layer of the MR sensors is designed such that the resistance changes when a magnetic field is applied perpendicular to the current flow. When the magnetic pitch moves past the MR sensor, two sinusoidal signals with a phase offset of 90° are generated with a period length of 500 µm.

## Operating principle

58 Measurement principle

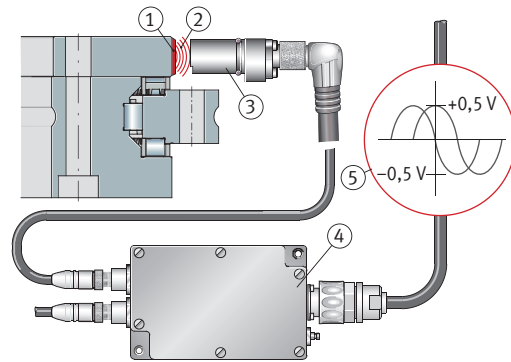

00015CE9

|   |                                              |   |                              |
|---|----------------------------------------------|---|------------------------------|
| 1 | Magnetic scale                               | 2 | Magnetic field lines         |
| 3 | Measuring head with magneto-resistive sensor | 4 | Electronic evaluation system |
| 5 | Analogue signals at output                   |   |                              |

### 3.2.3 Measurement accuracy

The more accurate the angular measurement, the more accurately a rotary axis can be positioned. The accuracy of the angular measurement is influenced by various factors.

36 Influencing factors on angular measurement accuracy

| Influencing factor                                                                     | Relevance                                                   |
|----------------------------------------------------------------------------------------|-------------------------------------------------------------|
| Quality of the dimensional scale, scanning process and electronic evaluation system    | Relevant for the bearing-integrated measuring system        |
| Eccentricity of the dimensional scale relative to the bearing raceway system           | Eliminated by the diametrical arrangement of the MR sensors |
| Runout deviation of the bearing arrangement                                            | Minor relevance                                             |
| Elasticity of the measurement system shaft and its linkage to the shaft to be measured | Minor relevance                                             |
| Elasticity of the stator shaft and shaft coupling                                      | Minor relevance                                             |

### Positional deviations

Positional deviations within a revolution are the absolute measurement errors that occur over one revolution of the system.


37 Positional deviations over one revolution of the system

| Axial/radial bearing  | Positional deviation at +20 °C<br>arcsec |
|-----------------------|------------------------------------------|
| YRTCM150-XL           | ±6                                       |
| YRTCM180-XL           | ±5                                       |
| YRTCM200-XL, YRTSM200 | ±3                                       |
| YRTCM260-XL, YRTSM260 | ±3                                       |
| YRTCM325-XL, YRTSM325 | ±3                                       |
| YRTCM395-XL, YRTSM395 | ±3                                       |
| YRTCM460-XL, YRTSM460 | ±3                                       |

Since the dimensional scale is connected directly to the rolling bearing, i.e. without any compensation elements, deflections in the bearing raceway system due to machining forces could affect the measurement result. This effect is eliminated by the diametrically opposed arrangement of the measuring heads in the electronic evaluation system.

### Measurement record

Each bearing with an angular measuring system is supplied with a measurement record. The accuracy is measured on the coded washer of bearing when the coding is applied and is documented. The measurement trace shows the pitch error of the coding.

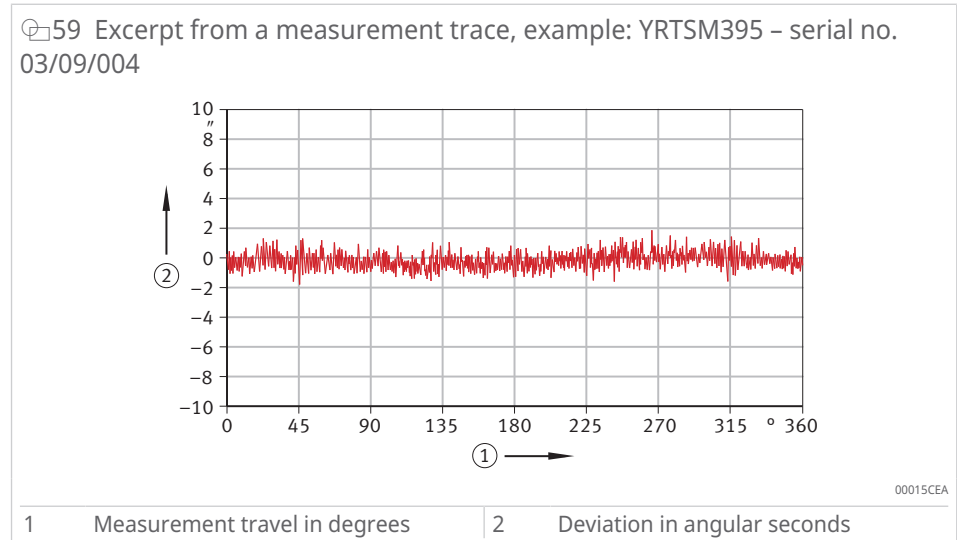

### 3.2.4 Setting and diagnostic software MEKOEDS

The distance between the measuring heads and the outside diameter of the shaft locating washer is set using the setting and diagnostic software MEKOEDS. The software is also used to check the function of the fitted measuring system and to detect defects in the measuring system.

#### 38 Setting and diagnostic software variants

| Description                     | Ordering designation |
|---------------------------------|----------------------|
| Setting and diagnostic software | MEKOEDS              |

#### Scope of delivery

- USB stick with 5 m interface cable
- MEKOEDS
- Mounting manual MON 18, Axial/radial bearings with integral angular measuring system
- Mounting manual MON 100, High-precision bearings for combined loads

### 3.2.5 Cables for signal transmission

The signal cables for connecting the measuring heads to the electronic evaluation system are available in lengths of 1 m, 2 m and 3 m.

The connection side to the electronic evaluation system has a straight plug. The connection side to the measuring head is suitable for straight plugs or 90° angled plugs.

In the case of the 90° angled plug, the cable outlet direction is defined in relation to the mounting position of the measuring heads.

### Advantages

The cables are suitable for use in machinery and plant for chip-forming machining:

- Cables and plugs are shielded.
- Cable sheath is made of polyurethane (PUR), halogen-free and flame-resistant.
- Signal cables are free from halogens, silicones and PVC, as well as resistant to microbes and hydrolysis.
- Cables are resistant to oils, greases and cooling lubricants.
- Cables are suitable for dynamic use in drag chains. Ensure that the cables are laid correctly.

### Bending cycles


☒39 Test conditions for bending cycles in drag chain applications

| Test condition              | Unit             | Value               |
|-----------------------------|------------------|---------------------|
| Bending cycles              | -                | ≥ 2·10 <sup>6</sup> |
| Bending radius              | mm               | 65                  |
| Acceleration                | m/s <sup>2</sup> | 5                   |
| Travel velocity             | m/min            | 200                 |
| Travel distance, horizontal | m                | 5                   |

### Connection cables

Measuring heads are connected using cables with 90° angled plugs or straight plugs.

☒60 Connection cable

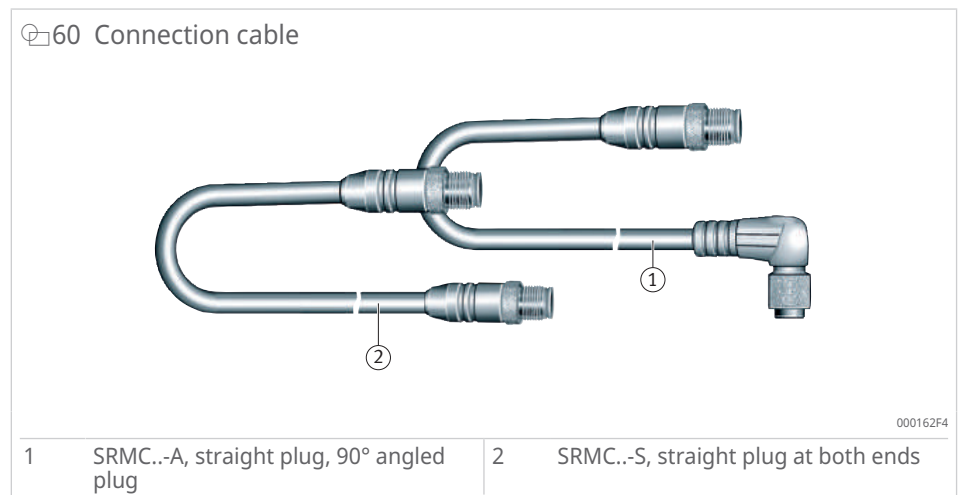

|   |                                           |   |                                       |
|---|-------------------------------------------|---|---------------------------------------|
| 1 | SRMC...-A, straight plug, 90° angled plug | 2 | SRMC...-S, straight plug at both ends |
|---|-------------------------------------------|---|---------------------------------------|

☒40 Connection cable variants

| Plug          |                  | Length | Ordering designation |
|---------------|------------------|--------|----------------------|
| Input         | Output           | m      |                      |
| Straight plug | Straight plug    | 1      | SRMC1-S              |
|               |                  | 2      | SRMC2-S              |
|               |                  | 3      | SRMC3-S              |
| Straight plug | Angled plug, 90° | 1      | SRMC1-A              |
|               |                  | 2      | SRMC2-A              |
|               |                  | 3      | SRMC3-A              |

Other variants are available by agreement.

**!** Use cables of equal length to connect both measuring heads in a measuring system.

### Plug connectors


The plug connectors are robust and designed for use in industrial environments. When connected, they meet protection class IP65 in accordance with DIN EN 60529.

The large-area shielding connections inside the plugs ensure effective shielding.

### Interface cable

The measuring system is connected to a PC via an interface cable and a serial interface. The interface cable is included in the delivery of MEKOEDS and has a length of 5 m. If the PC does not have a serial interface, Schaeffler recommends using a commercially available serial/USB converter. This converter is not included in the delivery.

The measuring data can be recorded, displayed in diagram form, printed and sent by e-mail to Schaeffler for evaluation.

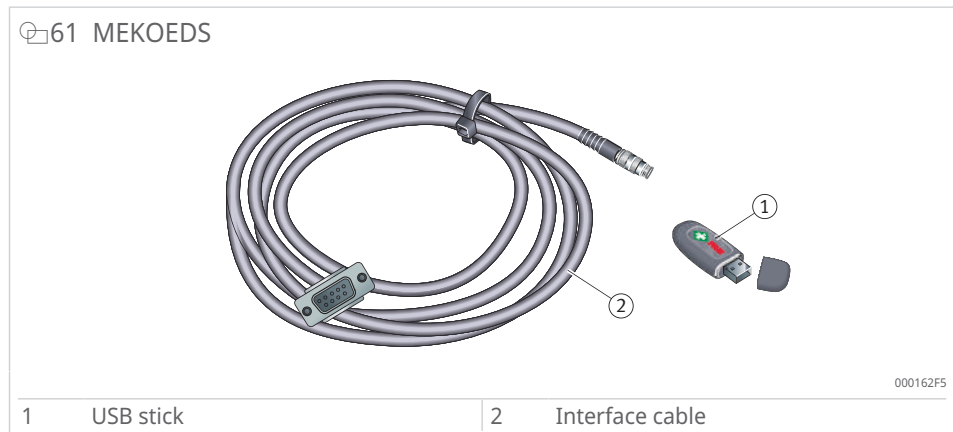

### 3.2.6 Error-free signal transmission

When fitted and operated as specified, the measuring system fulfils the requirements of Directive 2014/30/EU on electromagnetic compatibility (EMC).

#### 41 Demonstrated compliance with the EMC Directive

| EMC Directive            | Standard                             |              |
|--------------------------|--------------------------------------|--------------|
| EN 61000-6-2<br>Immunity | Electrostatic discharge              | EN 61000-4-2 |
|                          | Radiated electromagnetic fields      | EN 61000-4-3 |
|                          | Fast transient electric disturbances | EN 61000-4-4 |
|                          | Surge voltages                       | EN 61000-4-5 |
|                          | Conducted immunity                   | EN 61000-4-6 |
|                          | Power-frequency magnetic fields      | EN 61000-4-8 |
| EN 55011-B<br>Emission   | Interference voltage                 | EN 55011-B   |
|                          | Perturbing radiation                 | EN 55011-B   |

## Electrical sources of interference in the transmission of measurement signals

Interference voltages are mainly generated and transmitted through capacitive or inductive coupling. Interference can occur through lines and equipment inputs and outputs.

Possible sources of interference in the transmission of measurement signals:

- Strong magnetic fields from transformers and electric motors.
- Relays, contactors and solenoid valves.
- High-frequency equipment, pulse devices and magnetic stray fields due to switched-mode power supply units.
- Power cables and supply lines.

**!** Interference in initial operation can generally be attributed to absent or inadequate shielding of the measurement leads or insufficient spacing between signal and power cables.

The overall design should be such that the function of the measuring system is not influenced by sources of electrical or mechanical interference.

### 3.2.7 Measures to protect against interference


**!** The high-precision bearing and measuring system must be handled with care. The dimensional scale and sensor surface of the measuring heads are unprotected once the protective covers have been removed.

Screw the electronic evaluation system firmly to the earthed machine frame. If screw mounting surfaces are non-conductive, one of the fixing screws should be connected by electrically conductive means over the largest possible cross-section and a short route with the machine frame; all components must have the same potential.

The bearing components must be connected by electrically conductive means with potential equalisation (PE).

Only shielded plug connectors and cables may be used for signal transmissions.

62 Shielding and electronic post-processing systems

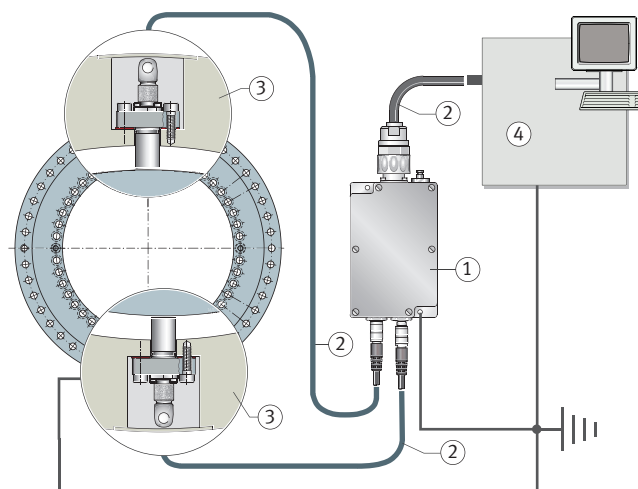



0000737A

|   |                              |   |                                   |
|---|------------------------------|---|-----------------------------------|
| 1 | Electronic evaluation system | 2 | Shielded plug connector and cable |
| 3 | Adjacent construction        | 4 | Electronic post-processing system |

### Protection against magnetic fields

Magnetic fields will damage or erase the magnetic dimensional scale, leading to partial measurement errors in the system.

- ! Sources of magnetism must be kept away from the magnetic scale on the outside diameter of the shaft locating washer. A field strength of approx. 70 mT or higher directly at the magnetic dimensional scale carries the risk of damage to the magnetic poles.
- ! Do not place magnetic dial gauge stands directly on the coded washer. Guide values: minimum air gap of 100 mm or 10 mm of unalloyed steel.

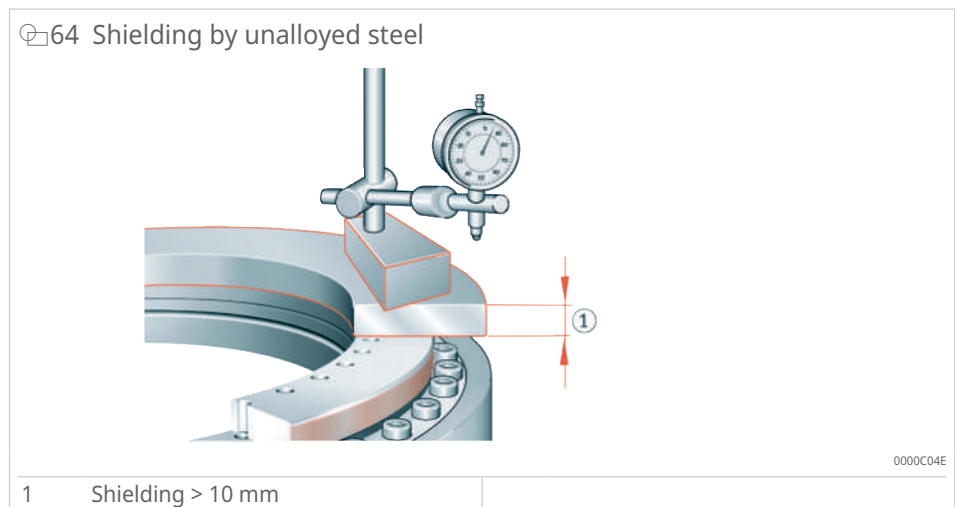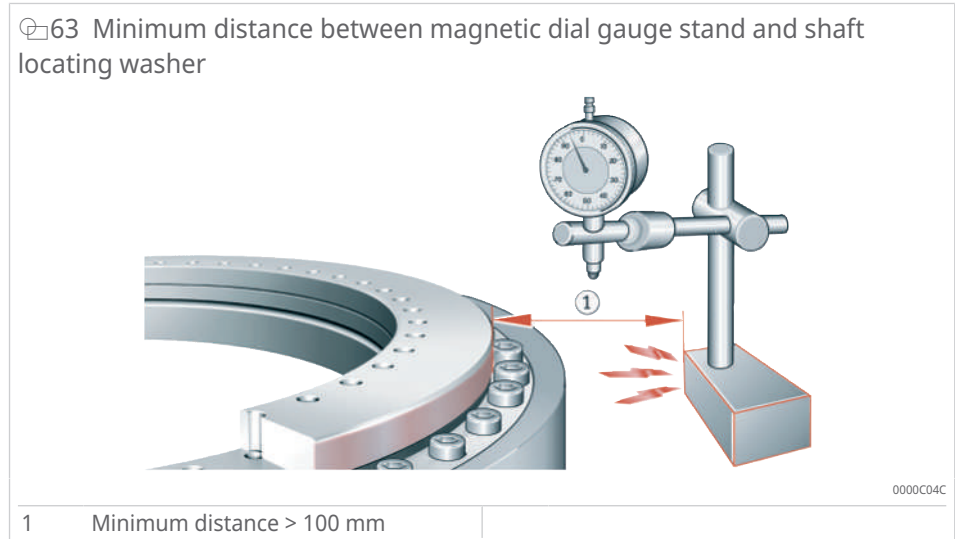

- ! Never touch the coding with magnetisable objects. Prevent contact with magnetisable contaminants. These could otherwise be deposited on the magnetic coding and lead to impaired measurement accuracy. Possible causes of magnetic contaminants:
  - Contaminants in the lubricant, e.g. oil bath.
  - Contaminants washed off by condensation (e.g. in conjunction with cooling devices).
  - Magnetisable wear debris from gears.

## Pressing down the measuring head by hand

In order to protect the sensor chip against damage, the measuring head can only be pressed against the dimensional scale by hand. Forces > 50 N can lead to sensor damage.

### 3.2.8 Laying signal cables

Do not lay cables in parallel or in close proximity to each other. An air gap of > 100 mm is recommended. If adequate spacing cannot be achieved, additional shielding or earthed metallic partition walls between the cables should be provided.

The requirement for spatial separation of cables also applies to typical sources of interference such as servo drives, frequency converters, contactors, solenoid valves and storage throttles.

#### 42 Aspects to consider when laying signal cables

| Aspect to consider              | Description                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable crossings                 | Avoid cable crossings.<br>If cables must be crossed, this should be carried out at a 90° angle                                                                                                                                    |
| Excess cable lengths            | Avoid long signal cables.<br>Looped excess lengths act like antennas and cause interference. Trim the cables to the required length.                                                                                              |
| Shield separations              | Shield separations present a functional risk and should be avoided.<br>If shield separations are unavoidable, these should be reconnected over as large an area as possible. Keep open wire ends to the connector terminal short. |
| Non-assigned wire ends          | Avoid non-assigned wire ends in signal cables.<br>Non-assigned ends should be connected on both sides to reference potential or ground potential.                                                                                 |
| Motor connectors                | Do not lay any additional lines for data cabling within shielded motor cables or motor terminal boxes. Spatial separation is recommended.                                                                                         |
| Interference suppression filter | Connections between interference suppression filters and the emission source should be kept as short as possible and should be shielded.                                                                                          |


### 3.2.9 Electronic evaluation system

The electronic evaluation system operates with the aid of a digital signal processor (DSP).

The input signals are digitised by an analogue/digital converter. The DSP automatically adjusts the sensor signals and calculates the effective angular value from the sensor signals by means of vector addition. Correction is carried out, for example, on the offset of the analogue signals. A digital/analogue converter generates synthetic analogue signals as a 1 V<sub>pp</sub> value.

The electronic evaluation system can be positioned at any location or within the adjacent construction. It is connected to the controller via a conventional 12-pin extension cable.

The cable for transmitting the voltage signals from the electronic evaluation system to the electronic post-processor can be up to 100 m long.

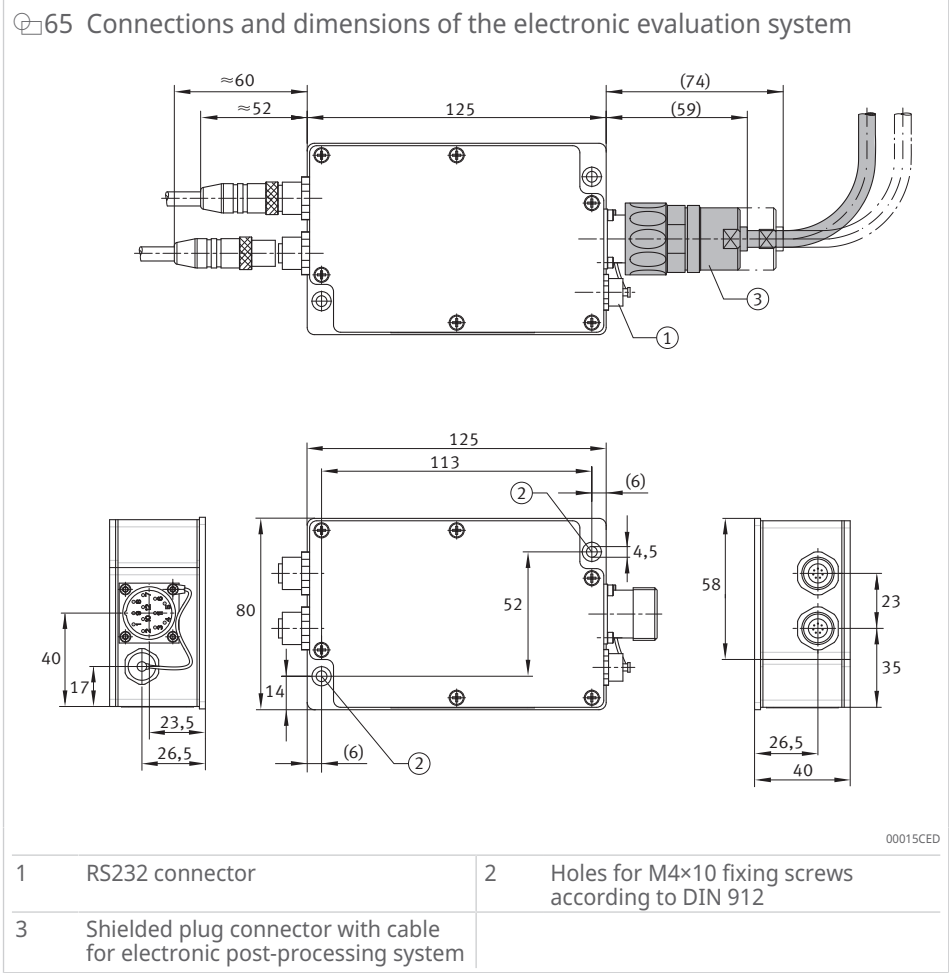


### 3.2.10 Functional principle for detecting the zero position

The connected CNC controller checks whether output signal A, output signal B and reference signal Z are positive.

When output signal A = MAX (90°) and output signal B = ZERO (0°), the zero position is reached.

The reference signal form has no influence. It is important to highlight slightly more than this one quadrant, but not more than one signal period.

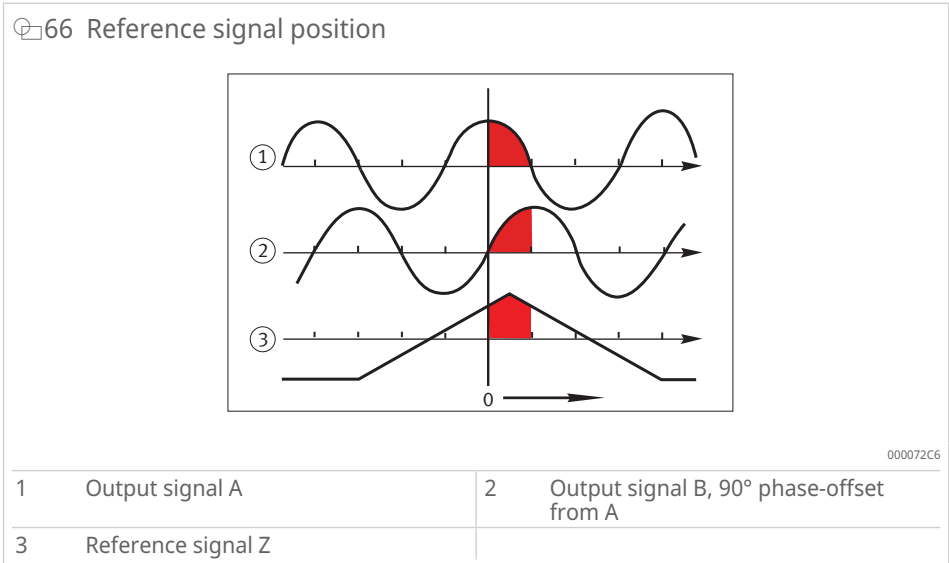

### 3.2.11 Compatibility

The analogue 1 V<sub>pp</sub> output signals of the incremental track can be processed by most conventional CNC controllers.

For new applications, it must be checked whether the CNC controller can be parametrised in accordance with the technical data for YRTCM or YRTSM.

For most controllers, the input parameters can be requested from us.

#### Entering the line count

With many controllers, the line count can be entered directly ►111 | 48.

In isolated cases, however, this is carried out using integer multiplication and division values. The line count cannot be entered exactly for the following sizes and must be corrected using other parameters:

- YRTCM200-XL
- YRTSM200
- YRTCM395-XL
- YRTSM395

#### Pitch-coded reference marks

Some controllers cannot record signals from pitch-coded measuring systems. In such cases, the electronic measuring system can be supplied as a single-reference-mark measuring system.

The differential pitch between two adjacent reference marks is 2 signal periods. In the zero transition area, the system design of the encoder leads to a greater difference. The controller must be capable of processing this aspect.

In swivel-type axes, the zero point of the measuring system, marked on the bearing by a drill bit, may be placed outside the scanning range of the yellow measuring head.

With continuous monitoring of the pitch-coded reference marks, the limiting speed  $n_G$  must not be exceeded during the reference run.

### 3.2.12 Functional testing according to standards

The functional capability has been tested under changing climatic conditions, under mechanical load and in contact with water, oil and cooling lubricants.



In the case of different operating conditions, please contact Schaeffler.

The measuring system design has been tested in accordance with the following standards.

#### 43 Climatic tests

| Test            | Standard       | Test parameters                      |          |
|-----------------|----------------|--------------------------------------|----------|
| Cold            | IEC 60068-2-1  | Storage temperature                  | -10±3 °C |
|                 |                | Dwell time                           | 72 h     |
| Dry heat        | IEC 60068-2-2  | Storage temperature                  | +70±2 °C |
|                 |                | Dwell time                           | 72 h     |
| Thermal cycling | IEC 60068-2-14 | Lower storage temperature            | -20±3 °C |
|                 |                | Upper storage temperature            | +60±3 °C |
|                 |                | Change gradient                      | 1 °C/min |
|                 |                | Dwell time at each limit temperature | 3 h      |
|                 |                | Number of cycles                     | 5        |

| Test               | Standard       | Test parameters                      |             |
|--------------------|----------------|--------------------------------------|-------------|
| Thermal shock      | IEC 60068-2-14 | Lower storage temperature            | -5±3 °C     |
|                    |                | Upper storage temperature            | +55±3 °C    |
|                    |                | Change duration                      | ≤ 8 s       |
|                    |                | Dwell time at each limit temperature | 20 min      |
|                    |                | Number of cycles                     | 10          |
| Humid heat, cyclic | IEC 60068-2-30 | Lower storage temperature            | +25±3 °C    |
|                    |                | Upper storage temperature            | +55±3 °C    |
|                    |                | Change duration                      | 3 h ... 6 h |
|                    |                | Cycle duration                       | 24 h        |
|                    |                | Number of cycles                     | 6           |

#### 44 Mechanical tests

| Test                        | Standard                   | Test parameters                          |                      |
|-----------------------------|----------------------------|------------------------------------------|----------------------|
| General                     | DIN EN 60086-2-6           | Condition B                              |                      |
|                             | MIL-STD-202, MIL-STD-204 C | -                                        |                      |
| Vibration (measuring heads) | IEC 60068-2-6              | Vibration type                           | Sinusoidal           |
|                             |                            | Frequency range                          | 10 Hz ... 2 kHz      |
|                             |                            | Amplitude (10 Hz ... 60 Hz)              | ±0,76 mm             |
|                             |                            | Amplitude (60 Hz ... 2 kHz)              | 100 m/s <sup>2</sup> |
|                             |                            | Rate                                     | 1 oct/min            |
|                             |                            | Load duration                            | 240 min per axis     |
|                             |                            | Number of frequency cycles per main axis | 16                   |
| Shocks (measuring heads)    | IEC 60068-2-27             | Acceleration                             | 30 g                 |
|                             |                            | Shock duration                           | 18 m/s               |
|                             |                            | Shock type                               | Semisine wave        |
|                             |                            | Number of shock cycles per main axis     | 6                    |
|                             |                            | Load directions                          | 3 main axes          |

#### 45 IP protection class

| Test                             | Standard     | Test parameters           |      |
|----------------------------------|--------------|---------------------------|------|
| Protection against water ingress | DIN EN 60529 | Protection class (SRM)    | IP67 |
|                                  |              | Protection class (MEKO/U) | IP65 |




Ingress protection testing is carried out with water as a medium and over a limited time period. All push-fit connections are fitted during testing. The measuring system should therefore be fitted with protection against cooling lubricants.

#### 46 Chemical resistance (measuring heads)

| Test                            | Test media                                                                          | Test parameters        |        |
|---------------------------------|-------------------------------------------------------------------------------------|------------------------|--------|
| Resistance to oil               | Aral Degol BG 150, Mobilgear SHC XMP 150, Shell Omala EPB 150, Klübersynth GH 6-150 | Storage temperature    | +60 °C |
|                                 |                                                                                     | Storage duration       | 168 h  |
| Resistance to cooling lubricant | Hosmac SL 145, Zubora 92F MR, Hycut ET 46, Hosmac S 558                             | Storage temperature    | +35 °C |
|                                 |                                                                                     | Storage duration       | 168 h  |
|                                 |                                                                                     | Concentration in water | 5 %    |

## 3.2.13 Plug configuration

67 Plug configuration of 12-pin flanged plug



00007073

The sensor lines are linked internally with the supply cables (2 with 12, 11 with 10). They are used by the motor controller as measurement lines to compensate for voltage drop on the supply cable (four-wire system). If this function is not supported by the controller used, the 5 V and 0 V lines can be connected in parallel to reduce voltage drop on the supply lead. The housing is shielded.

47 Plug configuration of 12-pin flanged plug

| Pin | Signals          |      | Voltage | Standard     |
|-----|------------------|------|---------|--------------|
| 5   | Output signal    | A    | +       | -            |
| 6   |                  |      | -       |              |
| 8   |                  | B    | +       |              |
| 1   |                  |      | -       |              |
| 3   | Reference signal | Z    | +       | DIN EN 50178 |
| 4   |                  |      | -       |              |
| 12  | $U_P$            | 5 V  | -       |              |
| 10  | $U_N$            | 0 V  | -       |              |
| 2   | Sensor           |      | 5 V     | -            |
| 11  |                  |      | 0 V     |              |
| 9   | -                | Free | -       | -            |
| 7   | -                | /    | -       |              |
| /   | -                | Free | -       |              |

## 3.2.14 Technical data

48 Technical data for SRM electronic measuring system

| Data                                                                   | Specification         | Comment                         |           |
|------------------------------------------------------------------------|-----------------------|---------------------------------|-----------|
| Power supply                                                           | DC +5 V $\pm$ 10 %    | -                               |           |
| Current consumption, electronic evaluation system with measuring heads | 280 mA                | SRMH01-YE, SRMH01-WH            |           |
| Scale                                                                  | Hard-magnetic coating | Periodic north-south pole pitch |           |
| Incremental signal                                                     | 1 V <sub>pp</sub>     | -                               |           |
| Line count/accuracy                                                    | YRTCM150-XL           | 2688/ $\pm$ 6 arcsec            | At +20 °C |
|                                                                        | YRTCM180-XL           | 3072/ $\pm$ 3 arcsec            |           |
|                                                                        | YRTCM200-XL, YRTSM200 | 3408/ $\pm$ 5 arcsec            |           |
|                                                                        | YRTCM260-XL, YRTSM260 | 4320/ $\pm$ 3 arcsec            |           |
|                                                                        | YRTCM325-XL, YRTSM325 | 5184/ $\pm$ 3 arcsec            |           |
|                                                                        | YRTCM395-XL, YRTSM395 | 6096/ $\pm$ 3 arcsec            |           |
|                                                                        | YRTCM460-XL, YRTSM460 | 7008/ $\pm$ 3 arcsec            |           |
| Reference marks                                                        | 24 marks, spacing 15° | Pitch-coded                     |           |
| Fixed reference mark pitch                                             | 30°                   | -                               |           |
| Differential pitch between two reference marks                         | 2signal periods       | -                               |           |
| Data interface                                                         | RS232C                | -                               |           |
| Recommended measurement step                                           | 0,0001°               | -                               |           |

| Data                                                   |                                   | Specification                          | Comment                               |
|--------------------------------------------------------|-----------------------------------|----------------------------------------|---------------------------------------|
| Operating temperature                                  |                                   | 0 °C ... +70 °C                        | -                                     |
| Protection class according to DIN EN 60529             |                                   | IP67                                   | When all connectors are plugged in    |
| Weight                                                 | Measuring heads                   | 38 g                                   | -                                     |
|                                                        | Electronic evaluation system      | 450 g                                  | -                                     |
| Electrical connection                                  | Measuring heads                   | PUR cable Ø6,5 mm                      | -                                     |
|                                                        | Electronic post-processing system | Plug, Ø15 mm                           | Not included in the scope of delivery |
|                                                        |                                   | 12-pin flanged plug, Ø28 mm            |                                       |
| Permissible cable length for electronic post-processor | maximum                           | 100 m                                  | -                                     |
| Moisture                                               | maximum                           | 70 % relative humidity, non-condensing | -                                     |

#### 49 SRM signal electronic measuring system

| Data                                 |          | Specification       | Comment                                                                          |
|--------------------------------------|----------|---------------------|----------------------------------------------------------------------------------|
| Output signal load                   |          | 100 Ω ... 120 Ω     | Recommended CNC input resistance                                                 |
| Output signal A, B                   | typical  | 0,9 V <sub>pp</sub> | Load resistance 120 Ω<br>f = 100 Hz                                              |
|                                      | maximum  | 0,8 V ... 1 V       |                                                                                  |
| Signal difference                    | typical  | < 1 %               | Difference in output signal amplitude between signals A and B<br>f = 100 Hz      |
|                                      |          |                     |                                                                                  |
| Output signal direct current voltage |          | 2,4 V ± 10 %        | Output signals A+, A-, B+, B-                                                    |
| Output signal offset voltage         | typical  | ±10 mV              | Direct current offset between A+ and A-, B+ and B-                               |
|                                      | maximum  | ±50 mV              |                                                                                  |
| Output signal frequency              | maximum  | DC 8 kHz            | -                                                                                |
| Width of reference signal Z          | typical  | 230°                | From centre of output signal period A, B at recommended reference movement speed |
|                                      | maximum  | 180° ... 270°       |                                                                                  |
| Reference signal midpoint voltage    |          | 2,4 V ± 10 %        | -                                                                                |
| Reference signal level               | typical  | 0,8 V <sub>pp</sub> | Load resistance 120 Ω                                                            |
|                                      | maximum  | 0,6 V ... 1 V       |                                                                                  |
|                                      | inactive | -0,4 V              |                                                                                  |
|                                      | active   | +0,4 V              |                                                                                  |
| System resolution                    | maximum  | 2500 steps per sine | -                                                                                |



### 3.6 Rigidity

Bearing rigidity information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ▶14 | 1.5.

### 3.7 Temperature range

Temperature range information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ▶14 | 1.6.


### 3.8 Dimensions, tolerances

Dimensional and tolerance information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ▶16 | 1.9.


CAD files are available for all bearing and measuring head series, which can be provided upon request or downloaded from the Schaeffler website.

### 3.9 Structure of the ordering designation

69 Structure of the ordering designation YRTCM

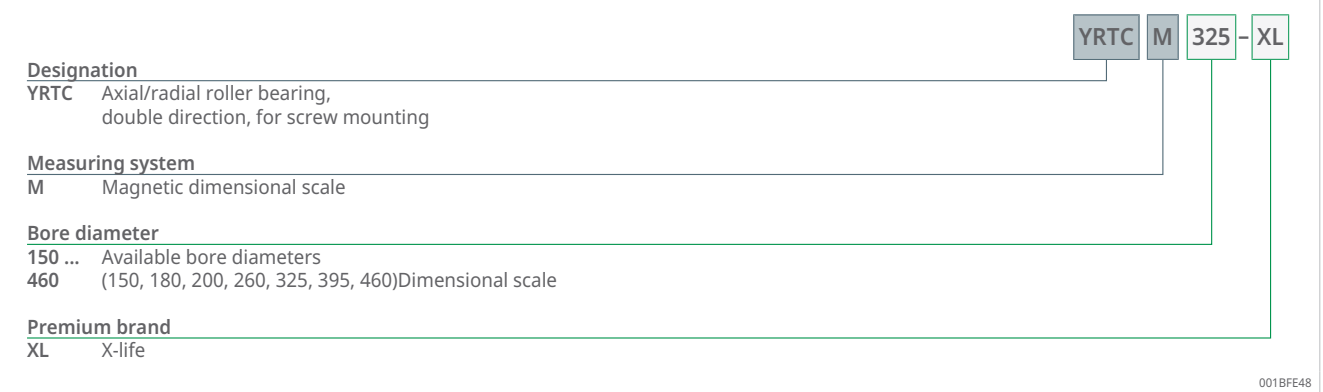

70 Structure of the ordering designation YRTSM

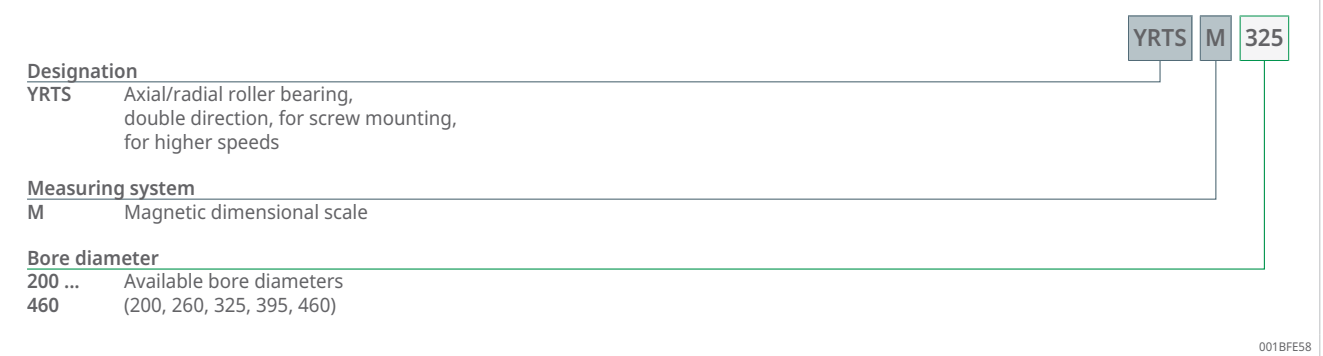

## 71 Structure of the ordering designation for the measuring system

|                                    |                                                                                                                  | YRTSM | 395 | / | SRM01 | / | 2× | SRMC2-A |
|------------------------------------|------------------------------------------------------------------------------------------------------------------|-------|-----|---|-------|---|----|---------|
| <b>Designation</b>                 |                                                                                                                  |       |     |   |       |   |    |         |
| <b>YRTCM</b>                       | Axial/radial roller bearing, double direction, for screw mounting, magnetic dimensional scale                    |       |     |   |       |   |    |         |
| <b>YRTSM</b>                       | Axial/radial roller bearing, double direction, for screw mounting, for higher speeds, magnetic dimensional scale |       |     |   |       |   |    |         |
| <b>Bore diameter</b>               |                                                                                                                  |       |     |   |       |   |    |         |
| <b>200 ...</b>                     | Available bore diameters                                                                                         |       |     |   |       |   |    |         |
| <b>460</b>                         | (200, 260, 325, 395, 460)                                                                                        |       |     |   |       |   |    |         |
| <b>Electronic measuring system</b> |                                                                                                                  |       |     |   |       |   |    |         |
| <b>SRM01</b>                       | Electronic measuring system SRM01                                                                                |       |     |   |       |   |    |         |
| <b>Connection cable</b>            |                                                                                                                  |       |     |   |       |   |    |         |
| <b>SRMC1-S ...</b>                 | Connection cable                                                                                                 |       |     |   |       |   |    |         |
| <b>SRMC3-S</b>                     | Straight plug on both ends                                                                                       |       |     |   |       |   |    |         |
| <b>SRMC1-A ...</b>                 | Connection cable                                                                                                 |       |     |   |       |   |    |         |
| <b>SRMC3-A</b>                     | Straight plug and 90° angled plug                                                                                |       |     |   |       |   |    |         |

001BFE68

### 3.10 Dimensioning

Dimensioning information for the bearing can be found in the sections for radial/axial bearings YRTC and YRTS ►23 | 1.11.

### 3.11 Design of the adjacent construction

A lead chamfer of  $1 \times 30^\circ$  must be provided in the locating bore for O-ring on the measuring head.

The measuring head should be centred in all planes relative to the shaft locating washer and secured against rotation by means of a locating face.




For centring of the coded shaft locating washer, the bearing must be supported over its entire height by the adjacent construction of the shaft.

The following points must be checked:

- The depth of the slot for the measuring heads must conform to dimension A.
- The screw mounting faces for the measuring heads must be free from burrs and flat.
- The measuring heads must be arranged at  $180 \pm 1^\circ$ .
- To ensure a properly fitted bearing and reliably functioning measuring system, the minimum recess diameter  $D_A$  must be integrated into the adjacent construction.
- The distance F is must maintained after the measuring heads have been fitted.
- When using cables with  $90^\circ$  angled plugs, the cable exit direction must correspond to the drawing.
- Provide tension relief for cables at measuring head height. This is particularly important where  $90^\circ$  angled plugs are used, as tensile forces acting on the cables can overload the plugs.

72 Design of adjacent construction and diametrically opposed arrangement of measuring heads

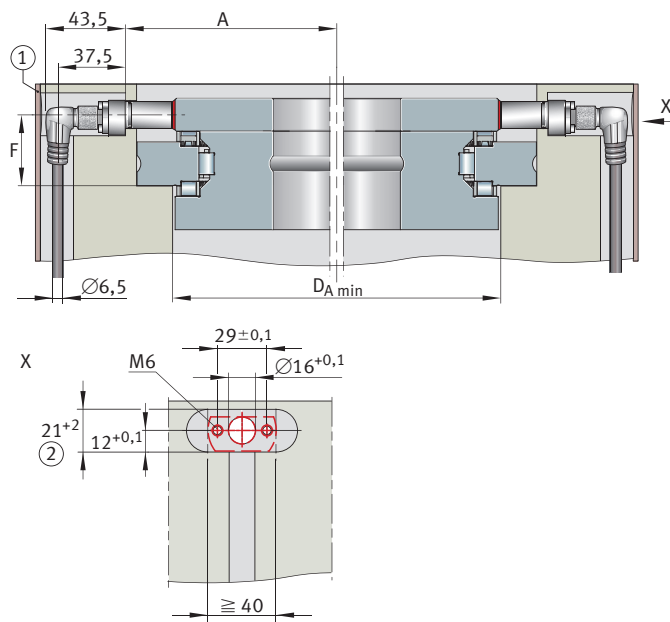

00018402

- 1 Cover
- 2 Fitting of a measuring head rotated by 180° is not possible.

50 Recess diameter and distance

| Axial/radial bearing  | A     | D <sub>A</sub> | F     |
|-----------------------|-------|----------------|-------|
|                       | -0,4  | min            | ±0,1  |
|                       | mm    | mm             | mm    |
| YRTCM150-XL           | 132   | 215            | 22    |
| YRTCM180-XL           | 147,2 | 245,5          | 25    |
| YRTCM200-XL, YRTSM200 | 160,6 | 274,5          | 25    |
| YRTCM260-XL, YRTSM260 | 196,9 | 345,5          | 29,75 |
| YRTCM325-XL, YRTSM325 | 231,3 | 415,5          | 32,5  |
| YRTCM395-XL, YRTSM395 | 267,5 | 486,5          | 33,75 |
| YRTCM460-XL, YRTSM460 | 303,8 | 560,5          | 36,5  |

- A                    mm                    Distance between sensor screw mounting surfaces and centre of bearing
- D<sub>A</sub>                  mm                    Recess diameter
- F                     mm                    Distance

**!** If the measuring heads are located deep in the housing, they must be sufficiently accessible to allow setting of the measurement gap.

The measuring heads and cables must be protected with suitable covers against mechanical damage and long-term contact with fluids.

- The positional orientation of the measuring heads is determined by the locating face. Fixing screws alone are not sufficient for defining the positional orientation.
- observe the minimum bending radii for signal cables
- fluids must not be allowed to build up in the measuring head pockets (IP67)

## 3.12 Fitting and dismantling

Fitting information can be found in the sections for axial/radial bearings and axial angular contact ball bearings ►40 | 1.13.

Due to the integrated dimensional scale and the small measuring heads designed for optimum use of available space, the measuring system is very easy to install.

### 3.12.1 Safety-related information about the measuring device under the terms of the Machinery Directive

The angular measuring system meets the described product characteristics when used correctly. The measuring system is not suitable for use in safety-related control loops and should not be used for this purpose. For systems with a safety focus, the higher-level system must check the positional value of the measuring device after power-on. The measuring device is not developed in accordance with IEC 61508 and no SIL classification exists.

Characteristics of the measuring device relevant to hazard analysis:

- The system does not have redundant functional elements.
- Software is involved in generating the output signals.
- After the initial operation procedure, the electronic evaluation system outputs a zero voltage signal in the event of the following events which can be detected as a fault by a suitable electronic post-processing system:
  - Fault in the power supply.
  - Error in plausibility testing of the two measuring head signals by means of quadrant comparison (detection of measuring head failure or loose connections, for example cable breakage).
  - Undershooting of the permissible minimum amplitudes (detection of measuring head failure, detection of an inadmissibly large increase in the measurement gap, for example after a machine crash).

### 3.12.2 Fitting guidelines for axial/radial bearings

The coded shaft locating washer is centred precisely during fitting via the shaft journal, which is accurately manufactured over the entire bearing height.

Loosen the retaining screws on the inner ring before fitting to allow the bearing inner ring and shaft locating washer with dimensional scale to align and centre without any force.



Do not use magnetisable tools. The magnetic dimensional scale has a protective strip for transport and fitting. Do not remove the protective strip until after the bearing is fitted.

#### Further information

MON 100 | High-precision bearings for combined loads | <https://www.schaeffler.de/std/2013>


### 3.12.3 Fitting guidelines for measuring heads

The mounting position of the measuring heads is defined by the design of the locating pockets.

### 3.12.4 Diametrically opposed arrangement of measuring heads

The diametrical arrangement of the measuring heads of  $180 \pm 1^\circ$  must not be exceeded or fallen short of, otherwise any eccentricities of the shaft locating washer will affect the measurement accuracy.

73 Diametrically opposed arrangement of measuring heads

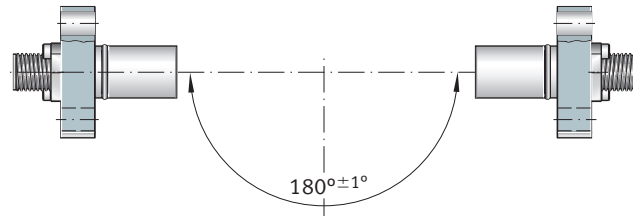

0000737D

### 3.12.5 Fitting the measuring heads


First, use the MEKOEDS software and the calibration shims supplied to set the correct distance from the measuring heads to the outside diameter of the shaft locating washer.

Then perform the teaching process using the MEKOEDS software to match the measuring heads to the electronic evaluation system.

**!** Tighten the fixing screws carefully. Do not exceed an amplitude display of 80 % of the MEKOEDS software during setting. The sensor surface of the measuring head may only be subjected to load by hand pressure. Forces over 50 N may damage the sensor surface.

1. Visually inspect the screw mounting surface for the angular measuring head in the housing, removing any foreign bodies, contamination, grease and oil.
2. Degrease the screw mounting surface by suitable means and leaving no residue, ensuring that no degreasing agent or foreign bodies penetrate the measuring system bearing.
3. Fit the angular measuring head with the calibration shims in the correct position.

74 Fitting the measuring head

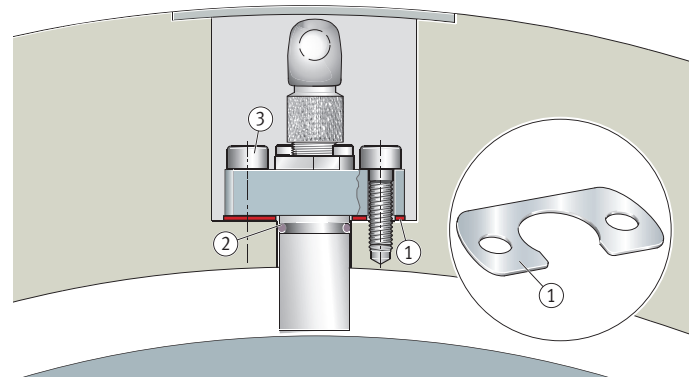

000071E9

|   |                  |   |              |
|---|------------------|---|--------------|
| 1 | Calibration shim | 2 | Sealing ring |
| 3 | Fixing screws    |   |              |

4. Fasten the angular measuring head in the housing, ensuring that the measuring head is correctly positioned.
5. Insert two new ISO 4762:2004-compliant cylinder head screws M6-8,8 into the mounting holes and screw until finger tight into the prepared threaded holes.
6. Set the measurement gap distance using the commissioning and diagnostics software.
7. Tighten both cylinder head screws to a tightening torque of 10 Nm using a calibrated torque wrench.
8. Use a suitable paint to secure the screw heads against inadvertent loosening.
9. Fasten the measuring head cable using suitable cable clamps to relieve the strain.

### 3.12.6 Cables and plugs for signal transmission

The plugs for the input signals to the electronic evaluation system are 8-pin.

During initial commissioning, the system automatically detects which measuring head is connected to which input.

- !** The measuring heads, plugs and cables must be protected against mechanical damage.

### 3.13 Spare parts

51 Spare parts for angular measuring system

| Spare part | d   | Description                                  |
|------------|-----|----------------------------------------------|
|            | mm  |                                              |
| WSM YRT200 | 200 | Shaft locating washer, bearing with coding   |
| WSM YRT260 | 260 |                                              |
| WSM YRT325 | 325 |                                              |
| WSM YRT395 | 395 |                                              |
| WSM YRT460 | 460 |                                              |
| SRMH01-YE  | -   | Measuring head with reference sensor, yellow |

| Spare part    | d  | Description                                 |
|---------------|----|---------------------------------------------|
|               | mm |                                             |
| SRMH01-WH     | -  | Measuring head with reference sensor, white |
| SS.SRM01-0010 | -  | Calibration shim for measuring heads        |
| SRMB01        | -  | Electronic evaluation system                |

d                      mm                      Bore diameter

### 3.14 Further information

Further information can be found in the following publications:

HR 1 | Rolling Bearings |

<https://www.schaeffler.de/std/1D3D>

MON 100 | High-precision bearings for combined loads |

<https://www.schaeffler.de/std/2013>

## 3.15 Product tables

### 3.15.1 Explanations


|                 |                   |                                                                                       |
|-----------------|-------------------|---------------------------------------------------------------------------------------|
| 1               | -                 | Two retaining screws                                                                  |
| 2               | -                 | Screw counterbores in the L-section ring open to the bearing bore                     |
| a               | mm                | Countersink depth                                                                     |
| C               | mm                | Outer ring width                                                                      |
| C <sub>0a</sub> | N                 | Basic static load rating, axial                                                       |
| C <sub>0r</sub> | N                 | Basic static load rating, radial                                                      |
| C <sub>a</sub>  | N                 | Basic dynamic load rating, axial                                                      |
| C <sub>aL</sub> | N/μm              | Axial rigidity of bearing position                                                    |
| C <sub>aW</sub> | N/μm              | Axial rigidity of rolling element set                                                 |
| C <sub>kL</sub> | Nm/mrad           | Tilting rigidity of bearing position                                                  |
| C <sub>kW</sub> | Nm/mrad           | Tilting rigidity of rolling element set                                               |
| C <sub>r</sub>  | N                 | Basic dynamic load rating, radial                                                     |
| C <sub>rL</sub> | N/μm              | Radial rigidity of bearing position                                                   |
| C <sub>rW</sub> | N/μm              | Radial rigidity of rolling element set                                                |
| d               | mm                | Bore diameter                                                                         |
| D               | mm                | Outside diameter                                                                      |
| d <sub>1</sub>  | mm                | Diameter of fastening hole, inner ring                                                |
| D <sub>1</sub>  | mm                | Inner ring diameter                                                                   |
| d <sub>2</sub>  | mm                | Countersink diameter, fixing hole                                                     |
| d <sub>3</sub>  | mm                | Diameter of fixing holes, outer ring                                                  |
| G               | -                 | Extraction threads                                                                    |
| H               | mm                | Height                                                                                |
| H <sub>1</sub>  | mm                | Contact surface height, outer ring                                                    |
| H <sub>2</sub>  | mm                | Contact surface height, outer ring                                                    |
| J               | mm                | Pitch circle diameter of fixing holes, inner ring                                     |
| J <sub>1</sub>  | mm                | Pitch circle diameter of fixing holes, outer ring                                     |
| m               | kg                | Mass                                                                                  |
| M <sub>A</sub>  | Nm                | Tightening torque for fixing screws according to DIN EN ISO 4762, strength class 10.9 |
| M <sub>R</sub>  | Nm                | Frictional torque                                                                     |
| n               | -                 | Number of screw mounting holes                                                        |
| n <sub>A</sub>  | -                 | Number of fixing screws, outer ring                                                   |
| n <sub>G</sub>  | min <sup>-1</sup> | Limiting speed                                                                        |
| n <sub>GA</sub> | -                 | Number of extraction threads                                                          |
| n <sub>I</sub>  | -                 | Number of fixing screws, inner ring                                                   |
| t               | °                 | Pitch angle of fixing holes                                                           |

3.15.2 YRTCM, main dimensions, performance data

Double direction


With incremental angular measuring system

3

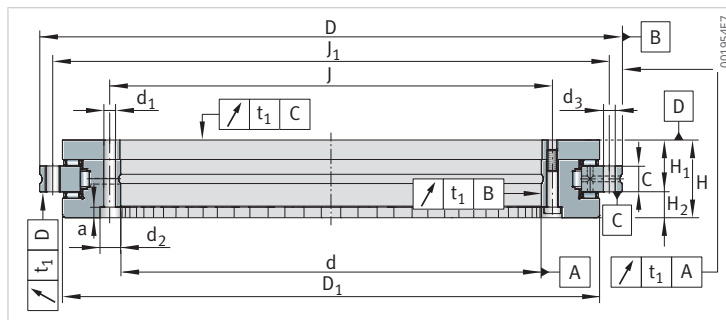


YRTCM

| Designation | d   | D   | H  | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J   | J <sub>1</sub> |
|-------------|-----|-----|----|----------------|----------------|----|------------------------|-----|----------------|
| -           | mm  | mm  | mm | mm             | mm             | mm | mm                     | mm  | mm             |
| YRTCM150-XL | 150 | 240 | 41 | 27             | 14             | 12 | 214,5                  | 165 | 225            |
| YRTCM180-XL | 180 | 280 | 44 | 30             | 14             | 15 | 245,1                  | 194 | 260            |
| YRTCM200-XL | 200 | 300 | 45 | 30             | 15             | 15 | 274,4                  | 215 | 285            |
| YRTCM260-XL | 260 | 385 | 55 | 36,5           | 18,5           | 18 | 347                    | 280 | 365            |
| YRTCM325-XL | 325 | 450 | 60 | 40             | 20             | 20 | 415,1                  | 342 | 430            |
| YRTCM395-XL | 395 | 525 | 65 | 42,5           | 22,5           | 20 | 487,7                  | 415 | 505            |
| YRTCM460-XL | 460 | 600 | 70 | 46             | 24             | 22 | 560,9                  | 482 | 580            |

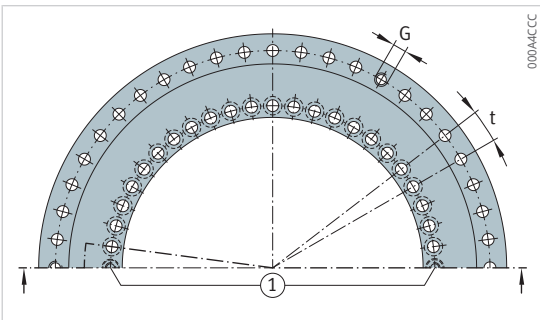

Hole pattern

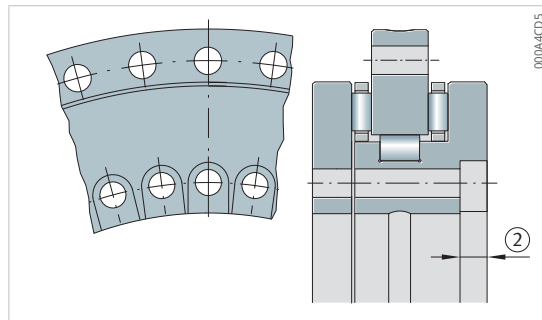

YRTCM325-XL


| $C_a$  | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$             | $n_{Ref}$         | $M_R$ | $m$  |
|--------|----------|--------|----------|-------------------|-------------------|-------|------|
| N      | N        | N      | N        | $\text{min}^{-1}$ | $\text{min}^{-1}$ | Nm    | kg   |
| 128000 | 650000   | 74000  | 146000   | 800               | -                 | 4     | 6,4  |
| 134000 | 730000   | 100000 | 200000   | 600               | -                 | 5     | 7,7  |
| 147000 | 850000   | 123000 | 275000   | 450               | -                 | 6     | 9,7  |
| 168000 | 1090000  | 140000 | 355000   | 300               | -                 | 9     | 18,3 |
| 247000 | 1900000  | 183000 | 530000   | 200               | -                 | 13    | 25   |
| 265000 | 2190000  | 200000 | 640000   | 200               | -                 | 19    | 33   |
| 290000 | 2550000  | 265000 | 880000   | 150               | -                 | 25    | 45   |

### 3.15.3 YRTCM, mounting dimensions, rigidity values

Double direction


With incremental angular measuring system

3

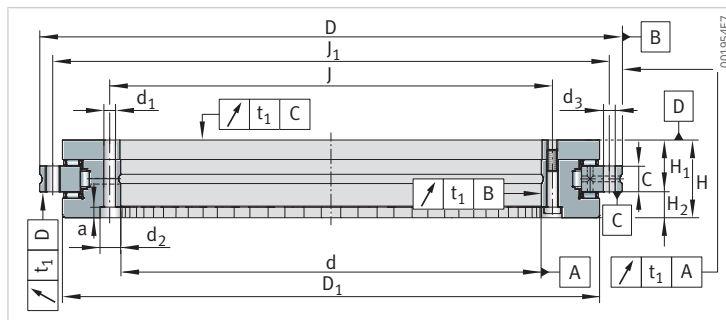


YRTCM

| Designation | d <sub>1</sub> | d <sub>2</sub> | a   | n <sub>I</sub> | d <sub>3</sub> | n <sub>A</sub> | M <sub>A</sub> |
|-------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|
| -           | mm             | mm             | mm  | -              | mm             | -              | Nm             |
| YRTCM150-XL | 7              | 11             | 6,2 | 34             | 7              | 33             | 14             |
| YRTCM180-XL | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTCM200-XL | 7              | 11             | 6,2 | 46             | 7              | 45             | 14             |
| YRTCM260-XL | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTCM325-XL | 9,3            | 15             | 8,2 | 34             | 9,3            | 33             | 34             |
| YRTCM395-XL | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |
| YRTCM460-XL | 9,3            | 15             | 8,2 | 46             | 9,3            | 45             | 34             |

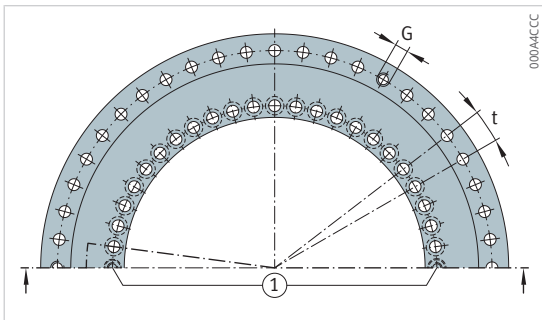

Hole pattern

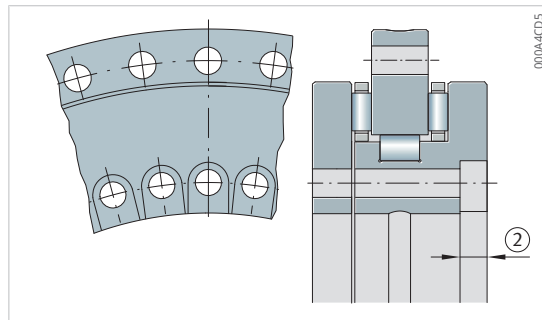

YRTCM325-XL


| n  | t   | G   | n <sub>GA</sub> | CaL   | CrL  | CkL     | CaW   | CrW   | CkW     |
|----|-----|-----|-----------------|-------|------|---------|-------|-------|---------|
| -  | °   | -   | -               | N/μm  | N/μm | Nm/mrad | N/μm  | N/μm  | Nm/mrad |
| 36 | 10  | M8  | 3               | 7600  | 4480 | 30300   | 12000 | 6500  | 61000   |
| 48 | 7,5 | M8  | 3               | 9400  | 5000 | 46000   | 13500 | 5300  | 88500   |
| 48 | 7,5 | M8  | 3               | 9800  | 5700 | 64000   | 15500 | 6200  | 128000  |
| 36 | 10  | M12 | 3               | 13800 | 7400 | 166000  | 19000 | 8100  | 265000  |
| 36 | 10  | M12 | 3               | 14200 | 8800 | 254000  | 33000 | 9900  | 633000  |
| 48 | 7,5 | M12 | 3               | 19800 | 8100 | 448000  | 37000 | 13000 | 1002000 |
| 48 | 7,5 | M12 | 3               | 24000 | 9100 | 686000  | 43000 | 17000 | 1543000 |

3.15.4 YRTSM, main dimensions, performance data

Double direction


With incremental angular measuring system

3

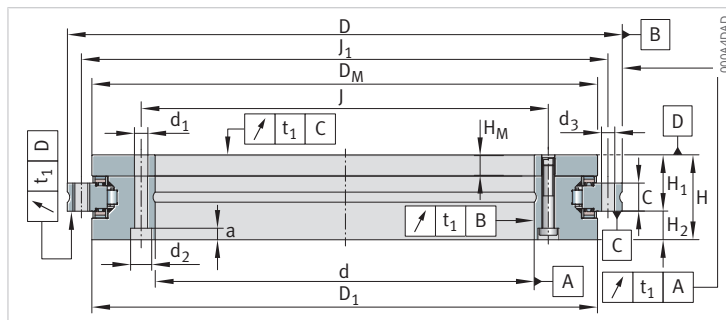


YRTSM

| Designation | d   | D   | H  | H <sub>1</sub> | H <sub>2</sub> | C  | D <sub>1</sub><br>max. | J   | J <sub>1</sub> |
|-------------|-----|-----|----|----------------|----------------|----|------------------------|-----|----------------|
| -           | mm  | mm  | mm | mm             | mm             | mm | mm                     | mm  | mm             |
| YRTSM200    | 200 | 300 | 45 | 30             | 15             | 15 | 274,4                  | 215 | 285            |
| YRTSM260    | 260 | 385 | 55 | 36,5           | 18,5           | 18 | 347                    | 280 | 365            |
| YRTSM325    | 325 | 450 | 60 | 40             | 20             | 20 | 415,1                  | 342 | 430            |
| YRTSM395    | 395 | 525 | 65 | 42,5           | 22,5           | 20 | 487,7                  | 415 | 505            |
| YRTSM460    | 460 | 600 | 70 | 46             | 24             | 22 | 560,9                  | 482 | 580            |

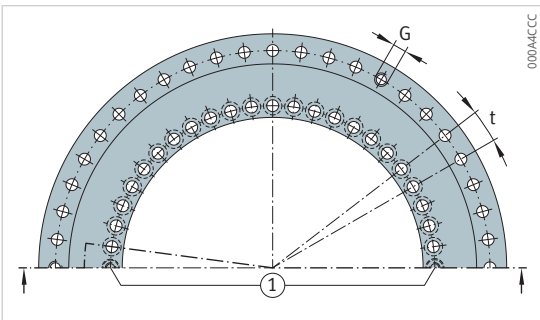

Hole pattern

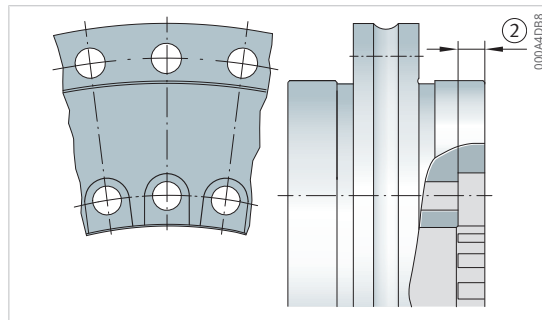

YRTSM325


| $C_a$  | $C_{0a}$ | $C_r$  | $C_{0r}$ | $n_G$             | $n_{Ref}$         | $M_R$ | $m$  |
|--------|----------|--------|----------|-------------------|-------------------|-------|------|
| N      | N        | N      | N        | $\text{min}^{-1}$ | $\text{min}^{-1}$ | Nm    | kg   |
| 155000 | 840000   | 94000  | 226000   | 1160              | 30                | -     | 9,7  |
| 173000 | 1050000  | 110000 | 305000   | 910               | 25                | -     | 18,3 |
| 191000 | 1260000  | 109000 | 320000   | 760               | 25                | -     | 25   |
| 214000 | 1540000  | 121000 | 390000   | 650               | 15                | -     | 33   |
| 221000 | 1690000  | 168000 | 570000   | 560               | 15                | -     | 45   |

### 3.15.5 YRTSM, mounting dimensions, rigidity values

Double direction


With incremental angular measuring system

3

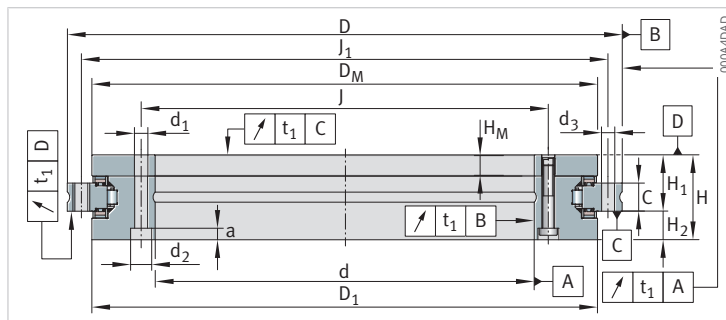


YRTSM

| Designation | $d_1$ | $d_2$ | $a$ | $n_I$ | $d_3$ | $n_A$ | $M_A$ |
|-------------|-------|-------|-----|-------|-------|-------|-------|
| -           | mm    | mm    | mm  | -     | mm    | -     | Nm    |
| YRTSM200    | 7     | 11    | 6,2 | 46    | 7     | 45    | 14    |
| YRTSM260    | 9,3   | 15    | 8,2 | 34    | 9,3   | 33    | 34    |
| YRTSM325    | 9,3   | 15    | 8,2 | 34    | 9,3   | 33    | 34    |
| YRTSM395    | 9,3   | 15    | 8,2 | 46    | 9,3   | 45    | 34    |
| YRTSM460    | 9,3   | 15    | 8,2 | 46    | 9,3   | 45    | 34    |

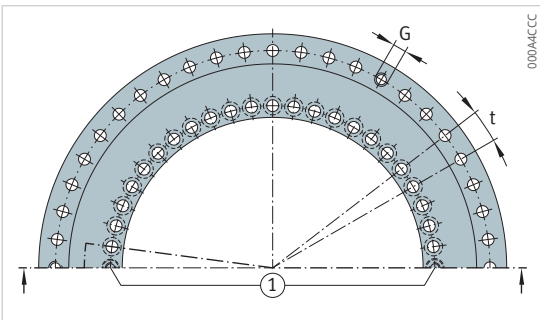

Hole pattern

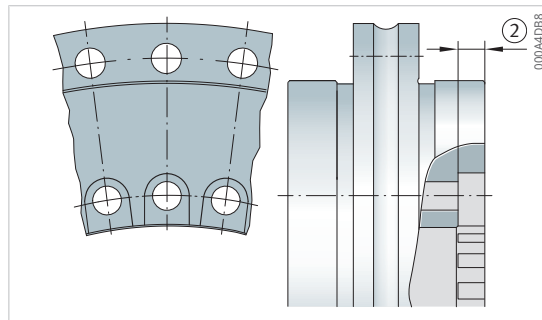


YRTSM325

| n  | t   | G   | n <sub>GA</sub> | CaL   | CrL   | CkL     | CaW   | CrW  | CkW     |
|----|-----|-----|-----------------|-------|-------|---------|-------|------|---------|
| -  | °   | -   | -               | N/μm  | N/μm  | Nm/mrad | N/μm  | N/μm | Nm/mrad |
| 48 | 7,5 | M8  | 3               | 8800  | 17900 | 65600   | 13600 | 3900 | 101000  |
| 36 | 10  | M12 | 3               | 11800 | 23500 | 151500  | 16800 | 5800 | 201000  |
| 36 | 10  | M12 | 3               | 14480 | 9200  | 260000  | 19900 | 7100 | 350000  |
| 48 | 7,5 | M12 | 3               | 17100 | 10200 | 440900  | 23400 | 8700 | 582000  |
| 48 | 7,5 | M12 | 3               | 19500 | 9200  | 633000  | 25400 | 9500 | 843000  |

## 4 Axial/radial bearings featuring shaft locating washer with helical gear teeth

Axial/radial bearing YRTCG featuring shaft locating washer with helical gear teeth


④75 Axial/radial bearing YRTCG featuring shaft locating washer with helical gear teeth

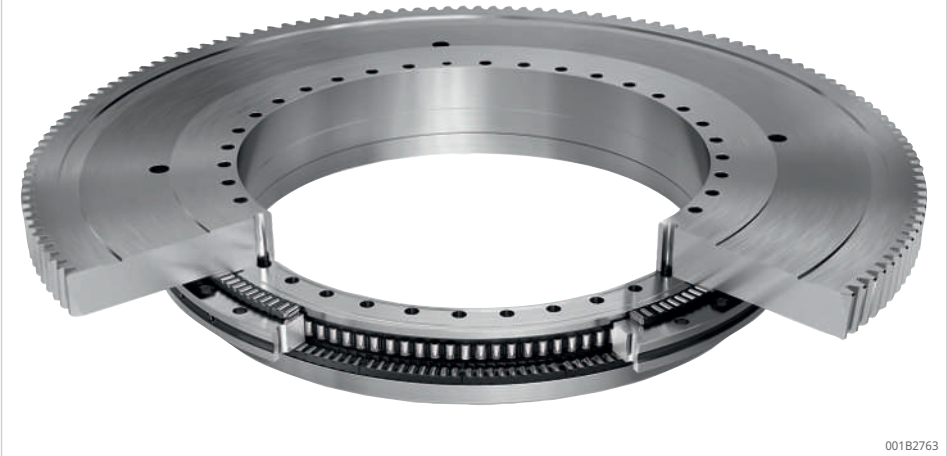

001B2763

Axial/radial bearings YRTCG are based on the YRTC bearing design. This proven rotary axis bearing solution is available in bore diameters 150 mm to 580 mm as a new variant featuring a shaft washer with helical gear teeth.

④76 Further development of the YRTC bearing construction to create YRTCG

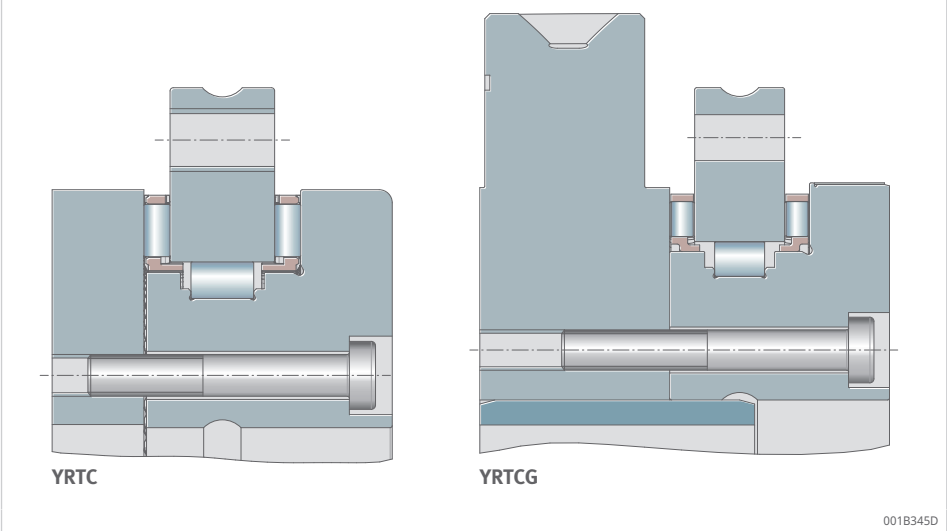

001B345D

### Advantages

- high tilting rigidity combined with low bearing frictional torque
- new design options for increasing performance and saving costs
- large passage for cables and hoses
- reduction in the number of components, installation space and weight achieved through the omission of a gear wheel


- increased accuracy and improved dynamic characteristics of the entire system due to the smaller number of components
- reduced costs due to simplified assembly
- applications include rotary tables with gear teeth, milling heads

### Axial/radial bearing YRTCGMA featuring shaft locating washer with helical gear teeth and inductive measuring system

A combination of YRTCG and absolute angular measuring system MHA is achieved with the variant YRTCGMA.

4

77 Axial/radial bearing YRTCGMA featuring shaft washer with helical gear teeth and inductive measuring system

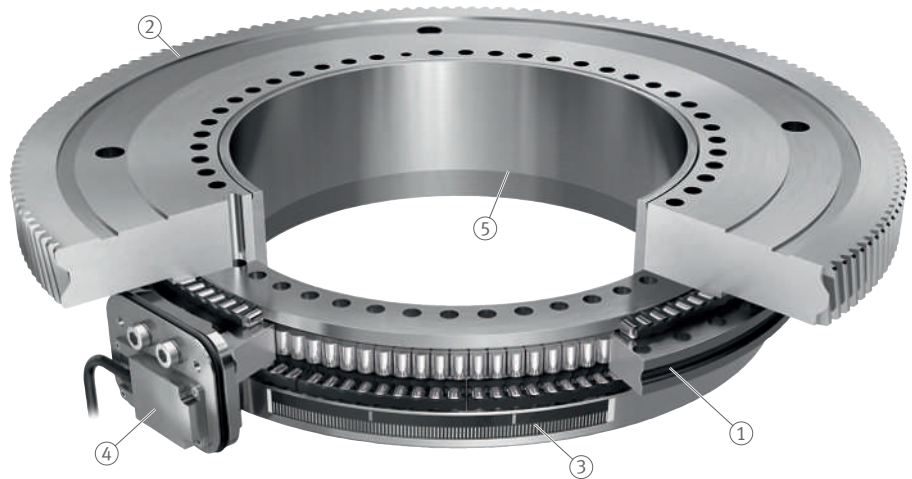

001B346D

|   |                              |   |                                      |
|---|------------------------------|---|--------------------------------------|
| 1 | Rotary table bearing YRTCGMA | 2 | Shaft washer with helical gear teeth |
| 3 | Measurement ring             | 4 | Measuring head MHA-0                 |
| 5 | Centring sleeve              |   |                                      |

## 4.1 Further information

Further information can be found in the following publications:

PDB 77 | Axial/Radial Bearings with Toothed Shaft Washer | <https://www.schaeffler.de/std/201D>

**Schaeffler Technologies AG & Co. KG**

Georg-Schäfer-Straße 30

97421 Schweinfurt

Germany

[www.schaeffler.de/en](http://www.schaeffler.de/en)

[info.de@schaeffler.com](mailto:info.de@schaeffler.com)

In Germany:

Phone 0180 5003872

From other countries:

Phone +49 9721 91-0

All information has been carefully compiled and checked by us, but we cannot guarantee complete accuracy. We reserve the right to make corrections. Therefore, please always check whether more up-to-date or amended information is available. This publication supersedes all deviating information from older publications. Printing, including excerpts, is only permitted with our approval.  
© Schaeffler Technologies AG & Co. KG  
TPI 120 / 03 / en-GB / 2026-04